
Swap

Release 0.3.0

Meheret Tesfaye

Jul 06, 2021

CONTENTS

1	Swap	1
2	What is a HTLC?	3
2.1	How do HTLC work?	3
2.1.1	Hash Locked	4
2.1.2	Time Locked	5
2.2	Benefits of HTLC's	5
2.2.1	Time Sensitivity	5
2.2.2	Trustless system	5
2.2.3	Validation of the Blockchain	5
2.2.4	Private Information's	5
2.2.5	Trading across multiple Cryptocurrencies	6
3	Installing Swap	7
3.1	Development	7
3.2	Dependencies	7
4	Command Line Interface (CLI)	9
4.1	swap	9
4.1.1	bitcoin	9
4.1.2	bytom	13
4.1.3	vapor	17
5	Utils	21
6	Bitcoin	23
6.1	Wallet	23
6.2	Hash Time Lock Contract (HTLC)	31
6.3	Transaction	33
6.3.1	FundTransaction	35
6.3.2	ClaimTransaction	36
6.3.3	RefundTransaction	38
6.4	Solver	39
6.4.1	FundSolver	39
6.4.2	ClaimSolver	40
6.4.3	RefundSolver	40
6.5	Signature	41
6.5.1	FundSignature	44
6.5.2	ClaimSignature	45
6.5.3	RefundSignature	46
6.6	Remote Procedure Call (RPC)	46

6.7	Utils	49
7	Bytom	53
7.1	Wallet	53
7.2	Hash Time Lock Contract (HTLC)	60
7.3	Transaction	63
7.3.1	FundTransaction	66
7.3.2	ClaimTransaction	67
7.3.3	RefundTransaction	69
7.4	Solver	70
7.4.1	FundSolver	70
7.4.2	ClaimSolver	71
7.4.3	RefundSolver	71
7.5	Signature	72
7.5.1	FundSignature	76
7.5.2	ClaimSignature	77
7.5.3	RefundSignature	77
7.6	Remote Procedure Call (RPC)	78
7.7	Utils	83
8	Vapor	87
8.1	Wallet	87
8.2	Hash Time Lock Contract (HTLC)	94
8.3	Transaction	97
8.3.1	FundTransaction	100
8.3.2	ClaimTransaction	101
8.3.3	RefundTransaction	103
8.4	Solver	104
8.4.1	FundSolver	104
8.4.2	ClaimSolver	105
8.4.3	RefundSolver	105
8.5	Signature	106
8.5.1	FundSignature	110
8.5.2	ClaimSignature	111
8.5.3	RefundSignature	111
8.6	Remote Procedure Call (RPC)	112
8.7	Utils	117
	Python Module Index	121
	Index	123

SWAP

Cryptocurrencies were created to make it possible for advanced, encrypted payments to be made between two or more people digitally, without the parties involved having to trust each other for the payment to be completed. In other words, cryptocurrencies make it possible to send money reliably to other people over the internet without the money being double spent, and without people getting scammed out of their money when they try to make these digital payments.

Note: Hash Time Lock Contracts (HTLC's) are a perfect example of a payment technology for cryptocurrencies which makes all of the aforementioned things possible.

Swap is a python library for Cross-chain atomic swap between the networks of two cryptocurrencies. Cross-chain atomic swap are the cheapest and most secure way to swap cryptocurrencies. It's a brand new decentralized payment environment based on Hash Time Lock Contracts (HTLC's) protocol.

WHAT IS A HTLC?

A Hash Time Lock contract (HTLC) is essentially a type of payment in which two people agree to a financial arrangement where one party will pay the other party a certain amount of Cryptocurrency, such as Bitcoin or Bytom assets. However, because these contracts are Time Locked, the receiving party only has a certain amount of time to accept the payment, otherwise the money can be returned to the sender.

Hash time lock contracts can help to eliminate the need for third parties in contracts between two parties. Third parties that are often involved in contracts are lawyers, banks, etc. Lawyers are often required to draw up contracts, and banks are often required to help store money and then transfer it to the receiving party in the contract.


With hash time lock contracts, two parties could hypothetically set up contracts and transfer money without the need for third parties. This is because the sending party could create the conditional payment, and then the receiving party could agree to it, receive it, and help validate the transaction in the process.

This could potentially revolutionize the way that many businesses interact with one another and dramatically speed up the time that it takes for business deals to be set up.

2.1 How do HTLC work?

The way that Hash Time Lock Contracts work is that the person who will be making the payment sets up a specific hash, which represents the amount of money that will be paid. To receive the payment, the recipient will have to create a cryptographic proof of payment, and he or she will have to do this within the specified amount of time. The amount of time that the recipient has to accept the payment can vary significantly from one Time Locked contract to the next. If the recipient meets the deadline, then the money will be theirs, if he or she fails to meet the deadline, it won't. So, there is an often a lot at stake when it comes to meeting deadlines from hash Time Locked contracts, when Cryptocurrencies are being exchanged.

The amount of time that the recipient has to accept the payment can vary significantly from one Time Locked contract to the next. If the recipient meets the deadline, then the money will be theirs, if he or she fails to meet the deadline, it won't. So, there is an often a lot at stake when it comes to meeting deadlines from hash Time Locked contracts, when Cryptocurrencies are being exchanged.

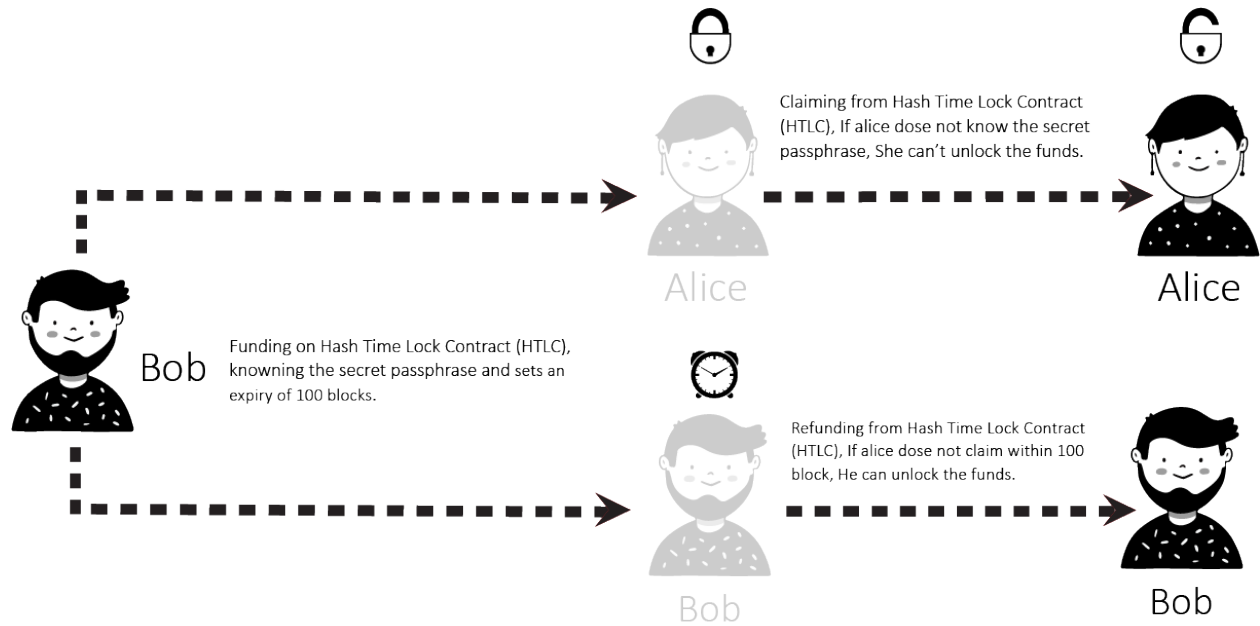


A Hash Time Lock Contract or HTLC is a class of payments that uses Hash Locked and Time Locked to require that the receiver of a payment either acknowledge receiving the payment prior to a deadline by generating cryptographic proof of payment or forfeit the ability to claim the payment, returning(refunding) it to the payer.

Hash Time Lock Contracts (HTLCs) allow payments to be securely routed across multiple payment channels which is super important because it is not optimal for a person to open a payment channel with everyone he/she is transacting with.


2.1.1 Hash Locked

A Hash Locked functions like “two-factor authentication” (2FA). It requires the intended recipient to provide the correct secret passphrase to claim the funds.

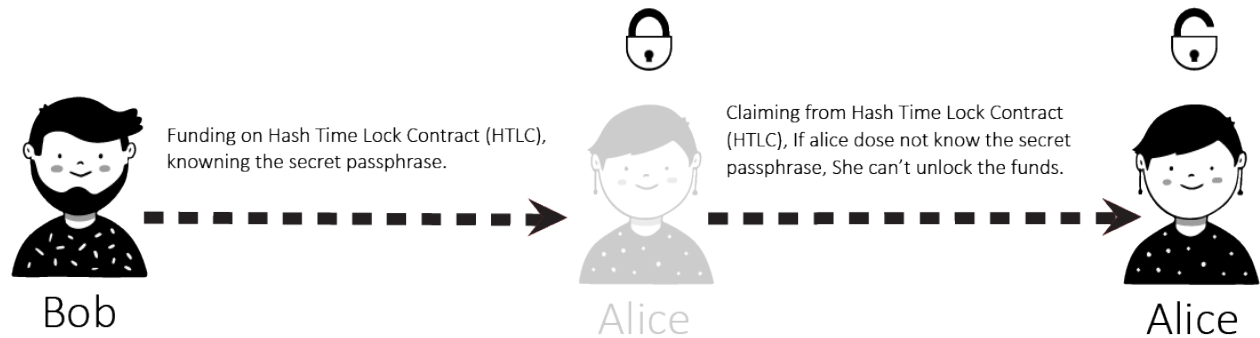

2.1.2 Time Locked

A Time Locked adds a “timeout” expiration date to a payment. It requires the intended recipient to claim the funds prior to the expiry. Otherwise, the transaction defaults to enabling the original sender of funds to claim a refund.

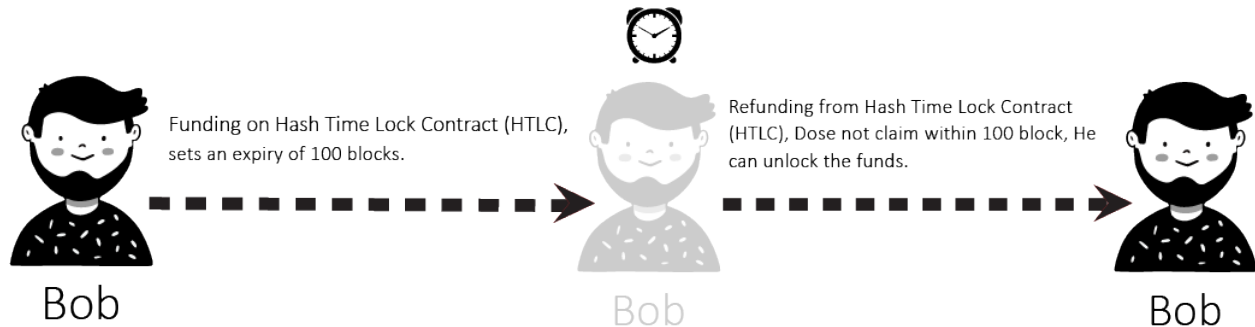

2.2 Benefits of HTLC's

There are many benefits to these types of contracts. First, because they are time sensitive, it prevents the person who is making the payment from having to wait indefinitely to find out whether or not his or her payment goes through. Second, the person who makes the payment will not have to waste his or her money if the payment is not accepted. It will simply be returned.

2.2.1 Time Sensitivity

The time sensitive nature of the transaction prevents the sender from having to wait forever to find out whether their payment went through. If the time runs out, the funds will just be sent back to the sender, so they don't have to worry and can wait for the process to unfold.

2.2.2 Trustless system

As is the case with all smart contracts, trust is not needed as the rules are already coded into the contract itself. Hash Time Lock Contracts take this one step further by implementing a time limit for recipients to acknowledge the payment.

2.2.3 Validation of the Blockchain

Transactions are validated because of the cryptographic proof of payment required by the receiver.

2.2.4 Private Information's

There are no complicated account setups or KYC/AML restrictions. Trade directly from your wallet with a counterparty of your choice. Only the parties involved know the details of the trade.

2.2.5 Trading across multiple Cryptocurrencies

HTLC makes Cross-chain transactions easier and more secure than ever. Cross chain transactions are the next step in the evolution of Cryptocurrency adoption. The easier it becomes to unite the hundreds of blockchain's that currently exist in silos, the faster the technology as a whole can begin to scale and achieve mass adoption.

INSTALLING SWAP

The easiest way to install Swap is via pip:

```
$ pip install swap
```

If you want to run the latest version of the code, you can install from git:

```
$ pip install git+git://github.com/meherett/swap.git
```

For the versions available, see the [tags on this repository](#).

3.1 Development

We welcome pull requests. To get started, just fork this [github repository](#), clone it locally, and run:

```
$ pip install -e . -r requirements.txt
```

Once you have installed, type `swap` to verify that it worked:

```
$ swap
Usage: swap [OPTIONS] COMMAND [ARGS]...

Options:
  -v, --version  Show Swap version and exit.
  -h, --help     Show this message and exit.

Commands:
  bitcoin  Select Bitcoin provider.
  bytom    Select Bytom provider.
  vapor    Select Vapor provider.
```

3.2 Dependencies

Swap has the following dependencies:

- [bytom-wallet-desktop](#) - version 1.1.0 or greater.
- [vapor-wallet-desktop](#) - version 1.1.7 or greater.
- [pip](#) - To install packages from the Python Package Index and other indexes
- [python3](#) version 3.6 or greater, [python3-dev](#)

COMMAND LINE INTERFACE (CLI)

After you have installed, type `swap` to verify that it worked:

```
$ swap
Usage: swap [OPTIONS] COMMAND [ARGS]...

Options:
  -v, --version  Show Shuttle version and exit.
  -h, --help     Show this message and exit.

Commands:
  bitcoin  Select Bitcoin provider.
  bytom    Select Bytom provider.
  vapor    Select Vapor provider.
```

4.1 swap

```
swap [OPTIONS] COMMAND [ARGS]...
```

Options

-v, --version
Show Swap version and exit.

4.1.1 bitcoin

Select Bitcoin provider.

```
swap bitcoin [OPTIONS] COMMAND [ARGS]...
```

claim

Select Bitcoin Claim transaction builder.

```
swap bitcoin claim [OPTIONS]
```

Options

- a, --address** <address>
Required Set Bitcoin recipient address.
- ti, --transaction-id** <transaction_id>
Required Set Bitcoin funded transaction id/hash.
- am, --amount** <amount>
Required Set Bitcoin amount (SATOSHI).
- n, --network** <network>
Set Bitcoin network.
Default mainnet
- v, --version** <version>
Set Bitcoin transaction version.
Default 2

decode

Select Bitcoin transaction raw decoder.

```
swap bitcoin decode [OPTIONS]
```

Options

- tr, --transaction-raw** <transaction_raw>
Required Set Bitcoin transaction raw.
- i, --indent** <indent>
Set json indent.
Default 4
- o, --offline** <offline>
Set Offline decode transaction raw.
Default True

fund

Select Bitcoin Fund transaction builder.

```
swap bitcoin fund [OPTIONS]
```

Options

- a, --address** <address>
Required Set Bitcoin sender address.
- ha, --htlc-address** <htlc_address>
Required Set Bitcoin Hash Time Lock Contract (HTLC) address.
- am, --amount** <amount>
Required Set Bitcoin amount (SATOSHI).
- n, --network** <network>
Set Bitcoin network.
Default mainnet
- v, --version** <version>
Set Bitcoin transaction version.
Default 2

htlc

Select Bitcoin Hash Time Lock Contract (HTLC) builder.

```
swap bitcoin htlc [OPTIONS]
```

Options

- sh, --secret-hash** <secret_hash>
Required Set secret 256 hash.
- ra, --recipient-address** <recipient_address>
Required Set Bitcoin recipient address.
- sa, --sender-address** <sender_address>
Required Set Bitcoin sender address.
- s, --sequence** <sequence>
Set Bitcoin sequence/expiration block.
Default 1000
- n, --network** <network>
Set Bitcoin network.
Default mainnet

refund

Select Bitcoin Refund transaction builder.

```
swap bitcoin refund [OPTIONS]
```

Options

- a, --address** <address>
Required Set Bitcoin sender address.
- ti, --transaction-id** <transaction_id>
Required Set Bitcoin funded transaction id/hash.
- am, --amount** <amount>
Required Set Bitcoin amount (SATOSHI).
- n, --network** <network>
Set Bitcoin network.
Default mainnet
- v, --version** <version>
Set Bitcoin transaction version.
Default 2

sign

Select Bitcoin transaction raw signer.

```
swap bitcoin sign [OPTIONS]
```

Options

- rxk, --root-xprivate-key** <root_xprivate_key>
Required Set Bitcoin root xprivate key.
- tr, --transaction-raw** <transaction_raw>
Required Set Bitcoin unsigned transaction raw.
- b, --bytecode** <bytecode>
Set Bitcoin witness HTLC bytecode. [default: None]
- sk, --secret-key** <secret_key>
Set secret key. [default: None]
- s, --sequence** <sequence>
Set Bitcoin sequence/expiration block.
Default 1000
- ac, --account** <account>
Set Bitcoin derivation from account.
Default 1

- ch, --change** <change>
Set Bitcoin derivation from change.
Default False
- ad, --address** <address>
Set Bitcoin derivation from address.
Default 1
- p, --path** <path>
Set Bitcoin derivation from path. [default: None]
- v, --version** <version>
Set Bitcoin transaction version.
Default 2

submit

Select Bitcoin transaction raw submitter.

```
swap bitcoin submit [OPTIONS]
```

Options

- tr, --transaction-raw** <transaction_raw>
Required Set signed Bitcoin transaction raw.

4.1.2 bytom

Select Bytom provider.

```
swap bytom [OPTIONS] COMMAND [ARGS]...
```

claim

Select Bytom Claim transaction builder.

```
swap bytom claim [OPTIONS]
```

Options

- a, --address** <address>
Required Set Bytom recipient address.
- ti, --transaction-id** <transaction_id>
Required Set Bytom funded transaction id/hash.
- am, --amount** <amount>
Required Set Bytom amount (NEU).
- as, --asset** <asset>
Set Bytom asset id.

Default ff

-n, --network <network>
Set Bitcoin network.

Default mainnet

decode

Select Bytom transaction raw decoder.

```
swap bytom decode [OPTIONS]
```

Options

-tr, --transaction-raw <transaction_raw>
Required Set Bytom transaction raw.

-i, --indent <indent>
Set json indent.

Default 4

fund

Select Bytom Fund transaction builder.

```
swap bytom fund [OPTIONS]
```

Options

-a, --address <address>
Required Set Bytom sender address.

-ha, --htlc-address <htlc_address>
Required Set Bytom Hash Time Lock Contract (HTLC) address.

-am, --amount <amount>
Required Set Bytom amount (NEU).

-as, --asset <asset>
Set Bytom asset id.

Default ff

-n, --network <network>
Set Bitcoin network.

Default mainnet

htlc

Select Bytom Hash Time Lock Contract (HTLC) builder.

```
swap bytom htlc [OPTIONS]
```

Options

- sh, --secret-hash** <secret_hash>
Required Set secret 256 hash.
- rpk, --recipient-public-key** <recipient_public_key>
Required Set Bytom recipient public key.
- spk, --sender-public-key** <sender_public_key>
Required Set Bytom sender public key.
- s, --sequence** <sequence>
Set Bytom sequence/expiration block.
Default 1000
- n, --network** <network>
Set Bytom network.
Default mainnet

refund

Select Bytom Refund transaction builder.

```
swap bytom refund [OPTIONS]
```

Options

- a, --address** <address>
Required Set Bytom sender address.
- ti, --transaction-id** <transaction_id>
Required Set Bytom funded transaction id/hash.
- am, --amount** <amount>
Required Set Bytom amount (NEU).
- as, --asset** <asset>
Set Bytom asset id.
Default ff
- n, --network** <network>
Set Bitcoin network.
Default mainnet

sign

Select Bytom transaction raw signer.

```
swap bytom sign [OPTIONS]
```

Options

- xk, --xprivate-key** <xprivate_key>
Required Set Bytom xprivate key.
- tr, --transaction-raw** <transaction_raw>
Required Set Bytom unsigned transaction raw.
- b, --bytecode** <bytecode>
Set Bytom witness HTLC bytecode. [default: None]
- sk, --secret-key** <secret_key>
Set secret key. [default: None]
- ac, --account** <account>
Set Bytom derivation from account.
Default 1
- ch, --change** <change>
Set Bytom derivation from change.
Default False
- ad, --address** <address>
Set Bytom derivation from address.
Default 1
- p, --path** <path>
Set Bytom derivation from path. [default: None]
- i, --indexes** <indexes>
Set Bytom derivation from indexes. [default: None]

submit

Select Bytom transaction raw submitter.

```
swap bytom submit [OPTIONS]
```

Options

- tr, --transaction-raw** <transaction_raw>
Required Set signed Bytom transaction raw.

4.1.3 vapor

Select Vapor provider.

```
swap vapor [OPTIONS] COMMAND [ARGS]...
```

claim

Select Vapor Claim transaction builder.

```
swap vapor claim [OPTIONS]
```

Options

- a, --address** <address>
Required Set Vapor recipient address.
- ti, --transaction-id** <transaction_id>
Required Set Vapor funded transaction id/hash.
- am, --amount** <amount>
Required Set Vapor amount (NEU).
- as, --asset** <asset>
Set Vapor asset id.
Default ff
- n, --network** <network>
Set Bitcoin network.
Default mainnet

decode

Select Vapor transaction raw decoder.

```
swap vapor decode [OPTIONS]
```

Options

- tr, --transaction-raw** <transaction_raw>
Required Set Vapor transaction raw.
- i, --indent** <indent>
Set json indent.
Default 4

fund

Select Vapor Fund transaction builder.

```
swap vapor fund [OPTIONS]
```

Options

- a, --address** <address>
Required Set Vapor sender address.
- ha, --htlc-address** <htlc_address>
Required Set Vapor Hash Time Lock Contract (HTLC) address.
- am, --amount** <amount>
Required Set Vapor amount (NEU).
- as, --asset** <asset>
Set Vapor asset id.
Default ff
- n, --network** <network>
Set Bitcoin network.
Default mainnet

htlc

Select Vapor Hash Time Lock Contract (HTLC) builder.

```
swap vapor htlc [OPTIONS]
```

Options

- sh, --secret-hash** <secret_hash>
Required Set secret 256 hash.
- rpk, --recipient-public-key** <recipient_public_key>
Required Set Vapor recipient public key.
- spk, --sender-public-key** <sender_public_key>
Required Set Vapor sender public key.
- s, --sequence** <sequence>
Set Vapor sequence/expiration block.
Default 1000
- n, --network** <network>
Set Vapor network.
Default mainnet

refund

Select Vapor Refund transaction builder.

```
swap vapor refund [OPTIONS]
```

Options

- a, --address** <address>
Required Set Vapor sender address.
- ti, --transaction-id** <transaction_id>
Required Set Vapor funded transaction id/hash.
- am, --amount** <amount>
Required Set Vapor amount (NEU).
- as, --asset** <asset>
Set Vapor asset id.
Default ff
- n, --network** <network>
Set Bitcoin network.
Default mainnet

sign

Select Vapor transaction raw signer.

```
swap vapor sign [OPTIONS]
```

Options

- xk, --xprivate-key** <xprivate_key>
Required Set Vapor xprivate key.
- tr, --transaction-raw** <transaction_raw>
Required Set Vapor unsigned transaction raw.
- b, --bytecode** <bytecode>
Set Vapor witness HTLC bytecode. [default: None]
- sk, --secret-key** <secret_key>
Set secret key. [default: None]
- ac, --account** <account>
Set Vapor derivation from account.
Default 1
- ch, --change** <change>
Set Vapor derivation from change.
Default False

-ad, --address <address>
Set Vapor derivation from address.

Default 1

-p, --path <path>
Set Vapor derivation from path. [default: None]

-i, --indexes <indexes>
Set Vapor derivation from indexes. [default: None]

submit

Select Vapor transaction raw submitter.

```
swap vapor submit [OPTIONS]
```

Options

-tr, --transaction-raw <transaction_raw>
Required Set signed Vapor transaction raw.

`swap.utils.generate_passphrase` (*length: int = 32*) → str
Generate entropy hex string.

Parameters `length` (*int*) – Passphrase length, default to 32.

Returns str – Passphrase hex string.

```
>>> from swap.utils import generate_passphrase
>>> generate_passphrase(length=32)
"N39rPfa3QvF2Tm2nPyoBpXNiBFXJywTz"
```

`swap.utils.generate_entropy` (*strength: int = 128*) → str
Generate entropy hex string.

Parameters `strength` (*int*) – Entropy strength, default to 128.

Returns str – Entropy hex string.

```
>>> from swap.utils import generate_entropy
>>> generate_entropy(strength=128)
"ee535b143b0d9d1f87546f9df0d06b1a"
```

`swap.utils.generate_mnemonic` (*language: str = 'english', strength: int = 128*) → str
Generate 12 word mnemonic.

Parameters

- `language` (*str*) – Mnemonic language, default to english.
- `strength` (*int*) – Entropy strength, default to 128.

Returns str – Mnemonic words.

```
>>> from swap.utils import generate_mnemonic
>>> generate_mnemonic(language="french")
"sceptre capter sequence girafe absolu relatif fleur zoologie muscle sirop_
↳saboter parure"
```

`swap.utils.is_mnemonic` (*mnemonic: str, language: Optional[str] = None*) → bool
Check mnemonic.

Parameters

- `mnemonic` (*str*) – Mnemonic words.
- `language` (*str*) – Mnemonic language, default to None.

Returns bool – Mnemonic valid/invalid.

```
>>> from swap.utils import is_mnemonic
>>> is_mnemonic(mnemonic="sceptre capter sequence girafe absolu relatif fleur_
↳zoologie muscle sirop saboter parure")
True
```

`swap.utils.get_mnemonic_language` (*mnemonic: str*) → str
Get mnemonic language.

Parameters `mnemonic` (*str*) – Mnemonic words.

Returns str – Mnemonic language.

```
>>> from swap.utils import get_mnemonic_language
>>> get_mnemonic_language(mnemonic="sceptre capter sequence girafe absolu relatif_
↳fleur zoologie muscle sirop saboter parure")
"french"
```

`swap.utils.sha256` (*data: Union[str, bytes]*) → str
SHA256 hash.

Parameters `data` (*str, bytes*) – Any string/bytes data.

Returns str – SHA256 hash.

```
>>> from swap.utils import sha256
>>> sha256(data="Hello Meheret!")
"3a26da82ead15a80533a02696656b14b5dbfd84eb14790f2e1be5e9e45820eeb"
```

`swap.utils.double_sha256` (*data: Union[str, bytes]*) → str
Double SHA256 hash.

Parameters `data` (*str, bytes*) – Any string/bytes data.

Returns str – Double SHA256 hash.

```
>>> from swap.utils import double_sha256
>>> double_sha256(data="Hello Meheret!")
"821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e0158"
```

`swap.utils.clean_transaction_raw` (*transaction_raw: str*) → str
Clean transaction raw.

Parameters `transaction_raw` (*str*) – Any transaction raw.

Returns str – Cleaned transaction raw.

```
>>> from swap.utils import clean_transaction_raw
>>> clean_transaction_raw(transaction_raw=
↳"eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZnU2d
↳")
↳"
↳"
↳"
```

BITCOIN

Bitcoin is a Cryptocurrency. It is a decentralized digital currency without a central bank or single administrator that can be sent from user to user on the peer-to-peer bitcoin network without the need for intermediaries.

6.1 Wallet

The implementation of Hierarchical Deterministic (HD) wallets generator for Bitcoin blockchain.

class `swap.providers.bitcoin.wallet.Wallet` (*network: str = 'mainnet'*)
Bitcoin Wallet class.

Parameters `network` (*str*) – Bitcoin network, defaults to mainnet.

Returns `Wallet` – Bitcoin wallet instance.

Note: Bitcoin has only two networks, `mainnet` and `testnet`.

from_entropy (*entropy: str, language: str = 'english', passphrase: Optional[str] = None*) →
swap.providers.bitcoin.wallet.Wallet
Initialize wallet from entropy.

Parameters

- **entropy** (*str*) – Bitcoin wallet entropy.
- **language** (*str*) – Bitcoin wallet language, default to english.
- **passphrase** (*str*) – Bitcoin wallet passphrase, default to None.

Returns `Wallet` – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_mnemonic (*mnemonic: str, language: Optional[str] = None, passphrase: Optional[str] = None*)
→ *swap.providers.bitcoin.wallet.Wallet*
Initialize wallet from mnemonic.

Parameters

- **mnemonic** (*str*) – Bitcoin wallet mnemonic.
- **language** (*str*) – Bitcoin wallet language, default to english.

- **passphrase** (*str*) – Bitcoin wallet passphrase, default to None.

Returns Wallet – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_mnemonic("indicate warm sock mistake code spot acid ribbon_
↳sing over taxi toast")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_seed (*seed: str*) → *swap.providers.bitcoin.wallet.Wallet*

Initialize wallet from seed.

Parameters **seed** (*str*) – Bitcoin wallet seed.

Returns Wallet – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_seed(
↳"baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03
↳")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_root_xprivate_key (*root_xprivate_key: str*) → *swap.providers.bitcoin.wallet.Wallet*

Initialize wallet from root xprivate key.

Parameters **root_xprivate_key** (*str*) – Bitcoin wallet root xprivate key.

Returns Wallet – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_root_xprivate_key(
↳"tprv8ZgxMBicQKsPeLxEBy2sJ8CqLdc76FUzeaiY5egrW4JdpM4F9b9A3L6AQhsY1TRsqJAfTdH7DdRAt5hRdcdh
↳")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_xprivate_key (*xprivate_key: str*) → *swap.providers.bitcoin.wallet.Wallet*

Initialize wallet from xprivate key.

Parameters **xprivate_key** (*str*) – Bitcoin wallet xprivate key.

Returns Wallet – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_xprivate_key(
↳"tprv8kPCFydoWU9ybQunXq7g17Me57ac5gcj8RartGqetP4wAnoDHQAVnLY4RtbYE3WH6xBLHbBJ1VZcRutM712SF
↳")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_wif (*wif: str*) → *swap.providers.bitcoin.wallet.Wallet*

Initialize wallet from wallet important format (WIF).

Parameters **wif** (*str*) – Bitcoin wallet important format.

Returns Wallet – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_wif("cTQpBvBAavuh6VzpeXiutLLTA5Uckr4eAJKuFsBMU1aQXBye1z9n")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_private_key (*private_key*) → *swap.providers.bitcoin.wallet.Wallet*

Initialize wallet from private key.

Parameters **private_key** (*str*) – Bitcoin wallet private key.

Returns **Wallet** – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_private_key(
↳ "adf0218f7e7276ed0f40b6919f2473497dd2bf7dcd4cabff4d4ef0e11948cde7")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_path (*path: str*) → *swap.providers.bitcoin.wallet.Wallet*

Drive Bitcoin wallet from path.

Parameters **path** (*str*) – Bitcoin wallet path.

Returns **Wallet** – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

from_index (*index: int, harden: bool = False*) → *swap.providers.bitcoin.wallet.Wallet*

Drive Bitcoin wallet from index.

Parameters

- **index** (*int*) – Bitcoin wallet index.
- **harden** (*bool*) – Use harden, default to False.

Returns **Wallet** – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_index(44, harden=True)
>>> wallet.from_index(0, harden=True)
>>> wallet.from_index(0, harden=True)
>>> wallet.from_index(0)
>>> wallet.from_index(0)
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
```

clean_derivation () → *swap.providers.bitcoin.wallet.Wallet*

Clean derivation Bitcoin wallet.

Returns **Wallet** – Bitcoin wallet instance.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.path()
"m/44'/0'/0'/0/0"
>>> wallet.clean_derivation()
<swap.providers.bitcoin.wallet.Wallet object at 0x040DA268>
>>> wallet.path()
None
```

strength() → Optional[int]
Get Bitcoin wallet strength.

Returns int – Bitcoin wallet strength.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.strength()
128
```

entropy() → Optional[str]
Get Bitcoin wallet entropy.

Returns str – Bitcoin wallet entropy.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.entropy()
"72fee73846f2d1a5807dc8c953bf79f1"
```

mnemonic() → Optional[str]
Get Bitcoin wallet mnemonic.

Returns str – Bitcoin wallet mnemonic.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.mnemonic()
"indicate warm sock mistake code spot acid ribbon sing over taxi toast"
```

passphrase() → Optional[str]
Get Bitcoin wallet passphrase.

Returns str – Bitcoin wallet passphrase.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1", passphrase=
↳ "meherett")
>>> wallet.passphrase()
"meherett"
```

language() → Optional[str]
Get Bitcoin wallet language.

Returns str – Bitcoin wallet language.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.language()
"english"
```

seed() → Optional[str]
Get Bitcoin wallet seed.

Returns str – Bitcoin wallet seed.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.seed()
```

```
↪ "baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03"
↪ "
```

root_xprivate_key (*encoded: bool = True*) → Optional[str]
Get Bitcoin wallet root xprivate key.

Parameters **encoded** (*bool*) – Encoded root xprivate key, default to True.

Returns str – Bitcoin wallet root xprivate key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.root_xprivate_key()
```

```
↪ "tprv8ZgxMBCiQKsPeLxEBy2sJ8CqLdc76FUzeaiY5egrW4JdpM4F9b9A3L6AQhsY1TRsqJAfTdh7DdRAt5hRdcdh"
↪ "
```

root_xpublic_key (*encoded: bool = True*) → Optional[str]
Get Bitcoin wallet root xpublic key.

Parameters **encoded** (*bool*) – Encoded root xprivate key, default to True.

Returns str – Bitcoin wallet root xpublic key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.root_xpublic_key()
```

```
↪ "tpubD6NzVbkrYhZ4Xoz25chThXrwuf83FafuDtKKNAj9vL72eqK1myxkDpi2aq9PKCbaQEbjZEaQBwiDQvYuMFZSW"
↪ "
```

xprivate_key (*encoded=True*) → Optional[str]
Get Bitcoin wallet xprivate key.

Parameters **encoded** (*bool*) – Encoded xprivate key, default to True.

Returns str – Bitcoin wallet xprivate key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.xprivate_key()

↪ "tprv8kPCFydoWU9ybQunXq7g17Me57ac5gcj8RartGqetP4wAnoDHQAVnLY4RtbYE3WH6xBLHbBJ1VZcRutM712SF
↪ "
```

xpublic_key (*encoded: bool = True*) → Optional[str]

Get Bitcoin wallet xpublic key.

Parameters **encoded** (*bool*) – Encoded xprivate key, default to True.**Returns** str – Bitcoin wallet xpublic key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.xpublic_key()

↪ "tpubDH5EQPg3eqqeUswaRUnGQX1ke96YF1odhjBeAnsxJesL1H3yunz5xq9vzbzGdsRqx3hnsMwZxn9icChmwC8W2q
↪ "
```

uncompressed () → str

Get Bitcoin wallet uncompressed public key.

Returns str – Bitcoin wallet uncompressed public key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.uncompressed()

↪ "065e8cb5fa76699079860a450bddd0e37e0ad3dbf2ddfd01d7b600231e6cde8ebc4241db8d66eb8085d5805bc
↪ "
```

compressed () → str

Get Bitcoin wallet compressed public key.

Returns str – Bitcoin wallet compressed public key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.compressed()
"02065e8cb5fa76699079860a450bddd0e37e0ad3dbf2ddfd01d7b600231e6cde8e"
```

chain_code () → str

Get Bitcoin wallet chain code.

Returns str – Bitcoin wallet chain code.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.chain_code()
"33a1c82cd13444724d0d217da8be96a8dcf663c8289ba870231c5f60e31acc5"
```

private_key() → str

Get Bitcoin wallet private key.

Returns str – Bitcoin wallet private key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.private_key()
"adf0218f7e7276ed0f40b6919f2473497dd2bf7dcd4cabff4d4ef0e11948cde7"
```

public_key(private_key: Optional[str] = None) → str

Get Bitcoin wallet public key.

Returns str – Bitcoin wallet public key.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.public_key()
"02065e8cb5fa76699079860a450bddd0e37e0ad3dbf2ddfd01d7b600231e6cde8e"
```

path() → Optional[str]

Get Bitcoin wallet path.

Returns str – Bitcoin wallet path.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.path()
"m/44'/0'/0'/0/0"
```

address() → str

Get Bitcoin wallet address.

Returns str – Bitcoin wallet address.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.address()
"mkFWGt4hT11XS8dJKzZRFsTrqjjAwZfQAC"
```

wif() → str

Get Bitcoin wallet important format (WIF).

Returns str – Bitcoin wallet important format.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.wif()
"cTQpBvBAavuh6VzpeXiutLLTA5Uckr4eAJKuFsBMU1aQXBye1Z9n"
```

hash() → str

Get Bitcoin wallet public key/address hash.

Returns str – Bitcoin wallet public key/address hash.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.hash()
"33ecab3d67f0e2bde43e52f41ec1ecbdc73f11f8"
```

p2pkh() → str

Get Bitcoin wallet public key/address p2pkh.

Returns str – Bitcoin wallet public key/address p2pkh.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.p2pkh()
"76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac"
```

balance() → int

Get Bitcoin wallet balance.

Returns int – Bitcoin wallet balance (SATOSHI amount).

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.balance()
67966
```

utxos (*limit: int = 15*) → list

Get Bitcoin wallet unspent transaction output (UTXO's).

Parameters **limit** (*int*) – Limit of UTXO's, default is 15.**Returns** list – Bitcoin unspent transaction outputs.

```
>>> from swap.providers.bitcoin.wallet import Wallet
>>> wallet = Wallet(network="testnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44'/0'/0'/0/0")
>>> wallet.utxos()
[{'index': 0, 'hash':
↳ '98c6a3d4e136d32d0848126e08325c94da2e8217593e92236471b11b42ee7999', 'output_
↳ index': 1, 'amount': 67966, 'script':
↳ '76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac'}]
```

6.2 Hash Time Lock Contract (HTLC)

Bitcoin Hash Time Lock Contract (HTLC).

class `swap.providers.bitcoin.htlc.HTLC` (*network: str = 'mainnet'*)
Bitcoin Hash Time Lock Contract (HTLC).

Parameters `network` (*str*) – Bitcoin network, defaults to mainnet.

Returns `HTLC` – Bitcoin HTLC instance.

Note: Bitcoin has only two networks, `mainnet` and `testnet`.

build_htlc (*secret_hash: str, recipient_address: str, sender_address: str, sequence: int = 1000*) →
swap.providers.bitcoin.htlc.HTLC
Build Bitcoin Hash Time Lock Contract (HTLC).

Parameters

- **secret_hash** (*str*) – secret sha-256 hash.
- **recipient_address** (*str*) – Bitcoin recipient address.
- **sender_address** (*str*) – Bitcoin sender address.
- **sequence** (*int*) – Bitcoin sequence number of expiration block, defaults to 1000.

Returns `HTLC` – Bitcoin Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(secret_hash=sha256("Hello Meheret!"), recipient_address=
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", sender_address=
↳ "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC", sequence=1000)
<swap.providers.bitcoin.htlc.HTLC object at 0x0409DAF0>
```

from_opcode (*opcode: str*) → *swap.providers.bitcoin.htlc.HTLC*
Initiate Bitcoin Hash Time Lock Contract (HTLC) from opcode script.

Parameters `opcode` (*str*) – Bitcoin opcode script.

Returns `HTLC` – Bitcoin Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.bitcoin.htlc import HTLC
>>> htlc = HTLC(network="testnet")
>>> opcode = "OP_IF OP_HASH256_
↳ 821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e0158 OP_
↳ EQUALVERIFY OP_DUP OP_HASH160 0e259e08f2ec9fc99a92b6f66fdfcb3c7914fd68 OP_
↳ EQUALVERIFY OP_CHECKSIG OP_ELSE e803 OP_CHECKSEQUENCEVERIFY OP_DROP OP_DUP_
↳ OP_HASH160 33ecab3d67f0e2bde43e52f41ec1ecbdc73f11f8 OP_EQUALVERIFY OP_
↳ CHECKSIG OP_ENDIF"
>>> htlc.from_opcode(opcode=opcode)
<swap.providers.bitcoin.htlc.HTLC object at 0x0409DAF0>
```

from_bytecode (*bytecode: str*) → *swap.providers.bitcoin.htlc.HTLC*
Initialize Bitcoin Hash Time Lock Contract (HTLC) from bytecode.

Parameters `bytecode` (*str*) – Bitcoin bytecode.

Returns `HTLC` – Bitcoin Hash Time Lock Contract (HTLC) instance.

```

>>> from swap.providers.bitcoin.htlc import HTLC
>>> htlc = HTLC(network="testnet")
>>> bytecode =
↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2e"
↳ ""
>>> htlc.from_bytecode(bytecode=bytecode)
<swap.providers.bitcoin.htlc.HTLC object at 0x0409DAF0>

```

bytecode() → str

Get Bitcoin Hash Time Lock Contract (HTLC) bytecode.

Returns str – Bitcoin HTLC bytecode.

```

>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.bytecode()

↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2e"
↳ ""

```

opcode() → str

Get Bitcoin Hash Time Lock Contract (HTLC) OP_Code.

Returns str – Bitcoin HTLC opcode.

```

>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.opcode()
"OP_IF OP_HASH256
↳ 821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e0158 OP_
↳ EQUALVERIFY OP_DUP OP_HASH160 0e259e08f2ec9fc99a92b6f66fdfcb3c7914fd68 OP_
↳ EQUALVERIFY OP_CHECKSIG OP_ELSE e803 OP_CHECKSEQUENCEVERIFY OP_DROP OP_DUP
↳ OP_HASH160 33ecab3d67f0e2bde43e52f41ec1ecbdc73f11f8 OP_EQUALVERIFY OP_
↳ CHECKSIG OP_ENDIF"

```

hash() → str

Get Bitcoin HTLC hash.

Returns str – Bitcoin Hash Time Lock Contract (HTLC) hash.

```

>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.hash()
"a9149418feed4647e156d6663db3e0cef7c050d0386787"

```

address() → str

Get Bitcoin Hash Time Lock Contract (HTLC) address.

Returns str – Bitcoin HTLC address.

```
>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.address()
"2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmP5ae"
```

balance() → int

Get Bitcoin HTLC balance.

Returns int – Bitcoin HTLC balance (SATOSHI amount).

```
>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.balance()
10000
```

utxos (*limit: int = 15*) → list

Get Bitcoin HTLC unspent transaction output (UTXO's).

Parameters **limit** (*int*) – Limit of UTXO's, default is 15.

Returns list – Bitcoin unspent transaction outputs.

```
>>> from swap.providers.bitcoin.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="testnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC",
↳ 1000)
>>> htlc.utxos()
[{'index': 0, 'hash':
↳ '9825b68e57c8a924285828dde37869c2eca3bb3784b171353962f0d7e7577da1', 'output_
↳ index': 0, 'amount': 10000, 'script':
↳ 'a9149418feed4647e156d6663db3e0cef7c050d0386787'}]
```

6.3 Transaction

Bitcoin transaction in blockchain network.

class swap.providers.bitcoin.transaction.**Transaction** (*network: str = 'mainnet', version: int = 2*)

Bitcoin Transaction.

Parameters

- **network** (*str*) – Bitcoin network, defaults to testnet.
- **version** (*int*) – Bitcoin transaction version, defaults to 2.

Returns Transaction – Bitcoin transaction instance.

Note: Bitcoin has only two networks, mainnet and testnet.

fee() → int

Get Bitcoin transaction fee.

Returns int – Bitcoin transaction fee.

```
>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction("mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> claim_transaction.fee()
576
```

hash() → str

Get Bitcoin transaction hash.

Returns str – Bitcoin transaction id/hash.

```
>>> from swap.providers.bitcoin.transaction import FundTransaction
>>> fund_transaction = FundTransaction("testnet")
>>> fund_transaction.build_transaction("mkFWGt4hT11XS8dJKzzRFsTrqjjAwZfQAC",
↳ "2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmP5ae", 10000)
>>> fund_transaction.hash()
"9cc0524fb8e7b2c5fecae4eb91d43a3dc5cc18e9906abcb35a5732ff52efcc7"
```

json() → dict

Get Bitcoin transaction json format.

Returns dict – Bitcoin transaction json format.

```
>>> from swap.providers.bitcoin.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("testnet")
>>> refund_transaction.build_transaction("mkFWGt4hT11XS8dJKzzRFsTrqjjAwZfQAC",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> refund_transaction.json()
{"hex":
↳ "02000000012c392217483906f902e73c4bc132864de58153772d79268960998162266634be0100000000ffff",
↳ ", "txid": "9cc0524fb8e7b2c5fecae4eb91d43a3dc5cc18e9906abcb35a5732ff52efcc7",
↳ ", "hash": "9cc0524fb8e7b2c5fecae4eb91d43a3dc5cc18e9906abcb35a5732ff52efcc7",
↳ ", "size": 117, "vsize": 117, "version": 2, "locktime": 0, "vin": [{"txid":
↳ "be346626628199608926792d775381e54d8632c14b3ce702f90639481722392c", "vout":
↳ 1, "scriptSig": {"asm": "", "hex": ""}, "sequence": "4294967295"}], "vout":
↳ [{"value": "0.00001000", "n": 0, "scriptPubKey": {"asm": "OP_HASH160
↳ 971894c58d85981c16c2059d422bcde0b156d044 OP_EQUAL", "hex":
↳ "a914971894c58d85981c16c2059d422bcde0b156d04487", "type": "p2sh", "address
↳ ": "2N729UBGZB3xjsGFRgKivy4bSjkaJGMVSpB"}}, {"value": "0.00010662", "n": 1,
↳ "scriptPubKey": {"asm": "OP_DUP OP_HASH160
↳ 6bce65e58a50b97989930e9a4ff1ac1a77515ef1 OP_EQUALVERIFY OP_CHECKSIG", "hex
↳ ": "76a9146bce65e58a50b97989930e9a4ff1ac1a77515ef188ac", "type": "p2pkh",
↳ "address": "mqLyrNDjpENRMZAoDpspH7kR9RtgvhWzYE"}]}}
```

raw() → str

Get Bitcoin main transaction raw.

Returns str – Bitcoin transaction raw.

```

>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction("mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> claim_transaction.raw()

↳ "02000000012c392217483906f902e73c4bc132864de58153772d79268960998162266634be0100000000ffff"
↳ "

```

type () → str

Get Bitcoin signature transaction type.

Returns str – Bitcoin signature transaction type.

```

>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction("mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> claim_transaction.type()
"bitcoin_claim_unsigned"

```

6.3.1 FundTransaction

class swap.providers.bitcoin.transaction.**FundTransaction** (*network: str = 'mainnet',
version: int = 2*)

Bitcoin Fund transaction.

Parameters

- **network** (*str*) – Bitcoin network, defaults to testnet.
- **version** (*int*) – Bitcoin transaction version, defaults to 2.

Returns FundTransaction – Bitcoin fund transaction instance.

Warning: Do not forget to build transaction after initialize fund transaction.

build_transaction (*address: str, htlc_address: str, amount: int, locktime: int = 0*) →
swap.providers.bitcoin.transaction.FundTransaction

Build Bitcoin fund transaction.

Parameters

- **address** (*str*) – Bitcoin sender address.
- **htlc_address** (*str*) – Bitcoin Hash Time Lock Contract (HTLC) address.
- **amount** (*int*) – Bitcoin amount to fund.
- **locktime** (*int*) – Bitcoin transaction lock time, defaults to 0.

Returns FundTransaction – Bitcoin fund transaction instance.

```

>>> from swap.providers.bitcoin.transaction import FundTransaction
>>> fund_transaction = FundTransaction("testnet")

```

(continues on next page)

(continued from previous page)

```
>>> fund_transaction.build_transaction(address=
↳ "mkFWGt4hT11XS8dJKzzRFsTrqjjAwZfQAC", htlc_address=
↳ "2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmp5ae", amount=10000)
<swap.providers.bitcoin.transaction.FundTransaction object at 0x0409DAF0>
```

sign (*solver*: swap.providers.bitcoin.solver.FundSolver) → swap.providers.bitcoin.transaction.FundTransaction
Sign Bitcoin fund transaction.

Parameters **solver** (bitcoin.solver.FundSolver) – Bitcoin fund solver.

Returns FundTransaction – Bitcoin fund transaction instance.

```
>>> from swap.providers.bitcoin.transaction import FundTransaction
>>> from swap.providers.bitcoin.solver import FundSolver
>>> from swap.providers.bitcoin.wallet import Wallet, DEFAULT_PATH
>>> sender_wallet = Wallet("testnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> fund_solver = FundSolver(sender_wallet.root_xprivate_key())
>>> fund_transaction = FundTransaction("testnet").build_transaction(sender_
↳ wallet.address(), "2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmp5ae", 10000)
>>> fund_transaction.sign(solver=fund_solver)
<swap.providers.bitcoin.transaction.FundTransaction object at 0x0409DAF0>
```

transaction_raw() → str
Get Bitcoin fund transaction raw.

Returns str – Bitcoin fund transaction raw.

```
>>> from swap.providers.bitcoin.transaction import FundTransaction
>>> fund_transaction = FundTransaction("testnet")
>>> fund_transaction.build_transaction("mkFWGt4hT11XS8dJKzzRFsTrqjjAwZfQAC",
↳ "2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmp5ae", 10000)
>>> fund_transaction.transaction_raw()

↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTJjZmkyMjE3NDgzOTA2ZjkwMmUzMDM0YmMzMzI4NjRkZTU4"
↳ ""
```

6.3.2 ClaimTransaction

class swap.providers.bitcoin.transaction.ClaimTransaction (*network*: str = 'main-net', *version*: int = 2)

Bitcoin Claim transaction.

Parameters

- **network** (*str*) – Bitcoin network, defaults to testnet.
- **version** (*int*) – Bitcoin transaction version, defaults to 2.

Returns ClaimTransaction – Bitcoin claim transaction instance.

Warning: Do not forget to build transaction after initialize claim transaction.

build_transaction (*address*: str, *transaction_id*: str, *amount*: int, *locktime*: int = 0) → swap.providers.bitcoin.transaction.ClaimTransaction
Build Bitcoin claim transaction.

Parameters

- **address** (*str*) – Bitcoin recipient address.
- **transaction_id** (*str*) – Bitcoin fund transaction id to redeem.
- **amount** (*int*) – Bitcoin amount to withdraw.
- **locktime** (*int*) – Bitcoin transaction lock time, defaults to 0.

Returns ClaimTransaction – Bitcoin claim transaction instance.

```
>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction(address=
↳ "mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF", transaction_id=
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd",
↳ amount=10000)
<swap.providers.bitcoin.transaction.ClaimTransaction object at 0x0409DAF0>
```

sign (*solver*: swap.providers.bitcoin.solver.ClaimSolver) → swap.providers.bitcoin.transaction.ClaimTransaction
Sign Bitcoin claim transaction.

Parameters **solver** (bitcoin.solver.ClaimSolver) – Bitcoin claim solver.

Returns ClaimTransaction – Bitcoin claim transaction instance.

```
>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> from swap.providers.bitcoin.solver import ClaimSolver
>>> from swap.providers.bitcoin.wallet import Wallet, DEFAULT_PATH
>>> recipient_wallet = Wallet("testnet").from_mnemonic(
↳ "6bc9e3bae5945876931963c2b3a3b040").from_path(DEFAULT_PATH)
>>> bytecode =
↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2e
↳ "
>>> claim_solver = ClaimSolver(recipient_wallet.root_xprivate_key(), "Hello
↳ Meheret!", bytecode)
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction(recipient_wallet.address(),
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> claim_transaction.sign(solver=claim_solver)
<swap.providers.bitcoin.transaction.ClaimTransaction object at 0x0409DAF0>
```

transaction_raw() → str

Get Bitcoin claim transaction raw.

Returns str – Bitcoin claim transaction raw.

```
>>> from swap.providers.bitcoin.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("testnet")
>>> claim_transaction.build_transaction("mgokpSJoX7npmAK1Zj8ze1926CLxYDt1iF",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> claim_transaction.transaction_raw()
↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTJjMzkyMjE3NDgzOTA2ZjkwMmU3M2M0YmMzMzI4NjRkZTU4
↳ "
```

6.3.3 RefundTransaction

class `swap.providers.bitcoin.transaction.RefundTransaction` (*network: str = 'main-net', version: int = 2*)

Bitcoin Refund transaction.

Parameters

- **network** (*str*) – Bitcoin network, defaults to testnet.
- **version** (*int*) – Bitcoin transaction version, defaults to 2.

Returns `RefundTransaction` – Bitcoin refund transaction instance.

Warning: Do not forget to build transaction after initialize refund transaction.

build_transaction (*address: str, transaction_id: str, amount: int, locktime: int = 0*) → `swap.providers.bitcoin.transaction.RefundTransaction`
Build Bitcoin refund transaction.

Parameters

- **address** (*str*) – Bitcoin sender address.
- **transaction_id** (*str*) – Bitcoin fund transaction id to redeem.
- **amount** (*int*) – Bitcoin amount to withdraw.
- **locktime** (*int*) – Bitcoin transaction lock time, defaults to 0.

Returns `RefundTransaction` – Bitcoin refund transaction instance.

```
>>> from swap.providers.bitcoin.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("testnet")
>>> refund_transaction.build_transaction(address=
↳ "mkFWGt4hT1lXS8dJKzRFsTrqjjAwZfQAC", transaction_id=
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd",
↳ amount=10000)
<swap.providers.bitcoin.transaction.RefundTransaction object at 0x0409DAF0>
```

sign (*solver: swap.providers.bitcoin.solver.RefundSolver*) → `swap.providers.bitcoin.transaction.RefundTransaction`
Sign Bitcoin refund transaction.

Parameters **solver** (`bitcoin.solver.RefundSolver`) – Bitcoin refund solver.

Returns `RefundTransaction` – Bitcoin refund transaction instance.

```
>>> from swap.providers.bitcoin.transaction import RefundTransaction
>>> from swap.providers.bitcoin.solver import RefundSolver
>>> from swap.providers.bitcoin.wallet import Wallet, DEFAULT_PATH
>>> sender_wallet = Wallet("testnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> bytecode =
↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2e
↳ "
>>> refund_solver = RefundSolver(sender_wallet.root_xprivate_key(), bytecode,
↳ sequence=1000)
>>> refund_transaction = RefundTransaction("testnet")
>>> refund_transaction.build_transaction(sender_wallet.address(),
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
```

(continues on next page)

(continued from previous page)

```
>>> refund_transaction.sign(solver=refund_solver)
<swap.providers.bitcoin.transaction.RefundTransaction object at 0x0409DAF0>
```

transaction_raw() → str

Get Bitcoin refund transaction raw.

Returns str – Bitcoin refund transaction raw.

```
>>> from swap.providers.bitcoin.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("testnet")
>>> refund_transaction.build_transaction("mkFWGt4hT11XS8dJKzZRFsTrqjjAwzfQAC",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000)
>>> refund_transaction.transaction_raw()

↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTJjMzkyMjE3NDgzOTA2ZjkwMmU3M2M0YmMzI4NjRkZTU4"
↳ ""
```

6.4 Solver

Bitcoin solver.

6.4.1 FundSolver

```
class swap.providers.bitcoin.solver.FundSolver (root_xprivate_key: str, account: int = 0,
change: bool = False, address: int = 0,
path: Optional[str] = None)
```

Bitcoin Fund solver.

Parameters

- **root_xprivate_key** (str) – Bitcoin sender root xprivate key.
- **account** (int) – Bitcoin derivation account, defaults to 0.
- **change** (bool) – Bitcoin derivation change, defaults to False.
- **address** (int) – Bitcoin derivation address, defaults to 0.
- **path** (str) – Bitcoin derivation path, defaults to None.

Returns FundSolver – Bitcoin fund solver instance.

```
>>> from swap.providers.bitcoin.solver import FundSolver
>>> sender_root_xprivate_key =
↳ "xprv9s21zrQH143K3XihXQBN8Uar2WBtrjSzk2oRDEGQ25pA2kKAADoQXaiiVXht163ZTrdtTXfM4GqNRE9gWQHky25Bp"
↳ ""
>>> fund_solver = FundSolver(root_xprivate_key=sender_root_xprivate_key)
<swap.providers.bitcoin.solver.FundSolver object at 0x03FCCA60>
```

6.4.2 ClaimSolver

```
class swap.providers.bitcoin.solver.ClaimSolver (root_xprivate_key: str, secret_key: str,
                                                bytecode: str, account: int = 0,
                                                change: bool = False, address: int =
0, path: Optional[str] = None)
```

Bitcoin Claim solver.

Parameters

- **root_xprivate_key** (*str*) – Bitcoin sender root xprivate key.
- **secret_key** (*str*) – Secret password/passphrase.
- **bytecode** (*str*) – Bitcoin witness HTLC bytecode..
- **account** (*int*) – Bitcoin derivation account, defaults to 0.
- **change** (*bool*) – Bitcoin derivation change, defaults to False.
- **address** (*int*) – Bitcoin derivation address, defaults to 0.
- **path** (*str*) – Bitcoin derivation path, defaults to None.

Returns ClaimSolver – Bitcoin claim solver instance.

```
>>> from swap.providers.bitcoin.solver import ClaimSolver
>>> recipient_root_xprivate_key =
↪ "xprv9s21ZrQH143K4Kpce43z5guPyxLrFoc2i8aQAq835Zzp4Rt7i6nZaMCnVSDyHT6MnmJGKHMrcUgaYpGojrug1ZN5
↪ "
>>> bytecode =
↪ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2ec9fc
↪ "
>>> claim_solver = ClaimSolver(wallet=recipient_root_xprivate_key, secret_key=
↪ "Hello Meheret!", bytecode=bytecode)
<swap.providers.bitcoin.solver.ClaimSolver object at 0x03FCCA60>
```

6.4.3 RefundSolver

```
class swap.providers.bitcoin.solver.RefundSolver (root_xprivate_key: str, bytecode: str,
                                                  sequence: int = 1000, account: int =
0, change: bool = False, address: int =
0, path: Optional[str] = None)
```

Bitcoin Refund solver.

Parameters

- **root_xprivate_key** (*str*) – Bitcoin sender root xprivate key.
- **bytecode** (*str*) – Bitcoin witness HTLC bytecode..
- **sequence** (*int*) – Bitcoin witness sequence number(expiration block), defaults to 1000.
- **account** (*int*) – Bitcoin derivation account, defaults to 0.
- **change** (*bool*) – Bitcoin derivation change, defaults to False.
- **address** (*int*) – Bitcoin derivation address, defaults to 0.
- **path** (*str*) – Bitcoin derivation path, defaults to None.

Returns RefundSolver – Bitcoin refund solver instance.

```

>>> from swap.providers.bitcoin.solver import RefundSolver
>>> sender_root_xprivate_key =
↳ "xprv9s21ZrQH143K3XihXQBN8Uar2WBtrjSzK2oRDEGQ25pA2kKAADoQXaiiVXht163ZTrdtTXfM4GqNRE9gWQHky25Bp
↳ "
>>> bytecode =
↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaa1bea34a12c843e01588876a9140e259e08f2ec9fc
↳ "
>>> refund_solver = RefundSolver(root_xprivate_key=sender_root_xprivate_key,
↳ bytecode=bytecode sequence=1000)
<swap.providers.bitcoin.solver.RefundSolver object at 0x03FCCA60>

```

6.5 Signature

Bitcoin signature.

```

class swap.providers.bitcoin.signature.Signature(network: str = 'mainnet', version: int
= 2)

```

Bitcoin Signature.

Parameters

- **network** (*str*) – Bitcoin network, defaults to mainnet.
- **version** (*int*) – Bitcoin transaction version, defaults to 2.

Returns Signature – Bitcoin signature instance.

Note: Bitcoin has only two networks, mainnet and testnet.

fee () → int

Get Bitcoin transaction fee.

Returns int – Bitcoin transaction fee.

```

>>> from swap.providers.bitcoin.signature import Signature
>>> from swap.providers.bitcoin.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTA4MjVlMDBiYTU5NmFiMTEzMjZjZDg5MjAzYjg4MmJjZTYwY
↳ "
>>> sender_root_xprivate_key =
↳ "xprv9s21ZrQH143K3XihXQBN8Uar2WBtrjSzK2oRDEGQ25pA2kKAADoQXaiiVXht163ZTrdtTXfM4GqNRE9gWQHky
↳ "
>>> fund_solver = FundSolver(sender_root_xprivate_key)
>>> signature = Signature("testnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.fee()
678

```

hash () → str

Get Bitcoin signature transaction hash.

Returns str – Bitcoin signature transaction hash or transaction id.

```

>>> from swap.providers.bitcoin.signature import Signature
>>> from swap.providers.bitcoin.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWUiOiA1NzYsICJyYXciOiAiMDIwMDAwMDAwMTA4MjVlMzZjZmM4NDY5ZDZlYTYwYTAzZmUyZWY1M
↳ "
↳ "

```

(continues on next page)

(continued from previous page)

```
>>> recipient_root_xprivate_key =
↳ "xprv9s21ZrQH143K4Kpce43z5guPyxLrFoc2i8aQAq835Zzp4Rt7i6nZaMcNVSDyHT6MnmJJGKHMrcUqaYpGojruq
↳ "
>>> bytecode =
↳ "63aa20821124b554d13f247b1e5d10b84e44fb1296f18f38bbaalbea34a12c843e01588876a9140e259e08f2e
↳ "
>>> claim_solver = ClaimSolver(recipient_root_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> signature = Signature("testnet")
>>> signature.sign(unsigned_claim_transaction_raw, claim_solver)
>>> signature.hash()
"29c7ac0ec049687e1b952cefda2f2f1f52957e6f42f35826af21ec6bd3edf60ce"
```

`json()` → dict

Get Bitcoin signature transaction json format.

Returns str – Bitcoin signature transaction json format.

```
>>> from swap.providers.bitcoin.signature import Signature
>>> from swap.providers.bitcoin.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTA4MjVlMDBiYTU5NmFiMTEtMjZjZDg5MjAzYjg4MmJjZTYwYy
↳ "
>>> sender_root_xprivate_key =
↳ "xprv9s21ZrQH143K3XihXQBN8Uar2WBtrjSzk2oRDEGQ25pA2kKAADoQXaiiVXht163ZTrdtTXfM4GqNRE9gWQHky
↳ "
>>> fund_solver = FundSolver(sender_root_xprivate_key)
>>> signature = Signature("testnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.json()
{"hex":
↳ "02000000010825e00ba596ab11126cd89203b882bce60a7db019e51217056c471f510cfd8500000006b48304
↳ ", "txid": "29c7ac0ec049687e1b952cefda2f2f1f52957e6f42f35826af21ec6bd3edf60ce
↳ ", "hash": "29c7ac0ec049687e1b952cefda2f2f1f52957e6f42f35826af21ec6bd3edf60ce
↳ ", "size": 224, "vsize": 224, "version": 2, "locktime": 0, "vin": [{"txid":
↳ "85fd0c511f476c051712e519b07d0ae6bc82b80392d86c1211ab96a50be02508", "vout":
↳ 0, "scriptSig": {"asm":
↳ "30450221009ac6afb68728eee53050ea7a301b6fb836e13b782cd52c29be2f8b0cc71f4427022069671a0a3df
↳ 02065e8cb5fa76699079860a450bddd0e37e0ad3dbf2ddfd01d7b600231e6cde8e", "hex":
↳ "4830450221009ac6afb68728eee53050ea7a301b6fb836e13b782cd52c29be2f8b0cc71f4427022069671a0a3
↳ "}, "sequence": "4294967295"}], "vout": [{"value": "0.00010000", "n": 0,
↳ "scriptPubKey": {"asm": "OP_HASH160
↳ 4695127b1d17c454f4bae9c41cb8e3cdb5e89d24 OP_EQUAL", "hex":
↳ "a9144695127b1d17c454f4bae9c41cb8e3cdb5e89d2487", "type": "p2sh", "address
↳ ": "2MygRsRs6En1RCj8a88FfsK1QBeissBTswL"}}, {"value": "0.00089322", "n": 1,
↳ "scriptPubKey": {"asm": "OP_DUP OP_HASH160
↳ 33ecab3d67f0e2bde43e52f41ec1ecbdc73f11f8 OP_EQUALVERIFY OP_CHECKSIG", "hex
↳ ": "76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac", "type": "p2pkh",
↳ "address": "mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC"}]}}
```

`raw()` → str

Get Bitcoin main transaction raw.

Returns str – Bitcoin signature transaction raw.

```
>>> from swap.providers.bitcoin.signature import Signature
>>> from swap.providers.bitcoin.solver import RefundSolver
```

(continues on next page)

- **timeout** (*int*) – Request timeout, default to 60.

Returns *int* – Bitcoin balance (SATOSHI amount).

```
>>> from swap.providers.bitcoin.rpc import get_balance
>>> get_balance (address="mkFWGt4hT11XS8dJKzRFRsTrqjjAwZfQAC", network="testnet")
67966
```

`swap.providers.bitcoin.rpc.get_utxos` (*address: str, network: str = 'mainnet', include_script: bool = True, limit: int = 15, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60*) → list

Get Bitcoin unspent transaction outputs (UTXO's).

Parameters

- **address** (*str*) – Bitcoin address.
- **network** (*str*) – Bitcoin network, defaults to testnet.
- **include_script** (*bool*) – Bitcoin include script, defaults to True.
- **limit** (*int*) – Bitcoin utxo's limit, defaults to 15.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns list – Bitcoin unspent transaction outputs (UTXO's).

```
>>> from swap.providers.bitcoin.rpc import get_utxos
>>> get_utxos (address="mkFWGt4hT11XS8dJKzRFRsTrqjjAwZfQAC", network="testnet")
[{'tx_hash': '98c6a3d4e136d32d0848126e08325c94da2e8217593e92236471b11b42ee7999',
  ↳ 'block_height': 1890810, 'tx_input_n': -1, 'tx_output_n': 1, 'value': 67966,
  ↳ 'ref_balance': 146610, 'spent': False, 'confirmations': 5278, 'confirmed':
  ↳ '2020-11-09T08:53:01Z', 'double_spend': False, 'script':
  ↳ '76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac'}]
```

`swap.providers.bitcoin.rpc.get_transaction` (*transaction_id: str, network: str = 'mainnet', headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60*) → dict

Get Bitcoin transaction detail.

Parameters

- **transaction_id** (*str*) – Bitcoin transaction id/hash.
- **network** (*str*) – Bitcoin network, defaults to testnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bitcoin transaction detail.

```
>>> from swap.providers.bitcoin.rpc import get_transaction
>>> get_transaction (transaction_id=
  ↳ "4e91bca76db112d3a356c17366df93e364a4922993414225f65390220730d0c1", network=
  ↳ "testnet")
{'block_hash': '000000000000006fb2aec57209181feb54750319e47263c48eca24369bdbcbee86',
  ↳ 'block_height': 1890810, 'block_index': 37, 'hash':
  ↳ '98c6a3d4e136d32d0848126e08325c94da2e8217593e92236471b11b42ee7999', 'addresses
  ↳ ': ['2N1NiQVBaSXmdZVATeST9sMQWVPeL5oA8Ks', 'mkFWGt4hT11XS8dJKzRFRsTrqjjAwZfQAC
  ↳ '4e91bca76db112d3a356c17366df93e364a4922993414225f65390220730d0c1',
  ↳ '104.197.28.151:18333', 'confirmed': '2020-11-09T08:53:01Z', 'received':
  ↳ '2020-11-09T08:47:10.889Z', 'ver': 2, 'double_spend': False, 'vin_sz': 1, 'vout_
  ↳ sz': 2, 'confirmations': 5279, 'confidence': 1, 'inputs': [{'prev_hash':
  ↳ '9825b68e57c8a924285828dde37869c2eca3bb3784b171353962f0d7e7577da1', 'output_
  ↳ '9825b68e57c8a924285828dde37869c2eca3bb3784b171353962f0d7e7577da1', 'value':
  ↳ 67966, 'script': '76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac'}]}
```

(continues on next page)

6.6. Remote Procedure Call (RPC)

67

```
swap.providers.bitcoin.rpc.decode_raw(raw: str, network: str = 'mainnet', offline: bool =
    True, headers: dict = {'accept': 'application/json',
    'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'},
    timeout: int = 60)
    → dict
```

Decode original Bitcoin raw.

Parameters

- **raw** (*str*) – Bitcoin transaction raw.
- **network** (*str*) – Bitcoin network, defaults to mainnet.
- **offline** (*bool*) – Offline decode, defaults to True.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bitcoin decoded transaction raw.

```
>>> from swap.providers.bitcoin.rpc import decode_raw
>>> decode_raw(raw=
    ↳"02000000011823f39a8c5f6f27845dd13a65e03fe2ef5108d235e7a36edb6eb267b0459c5a0100000006a473044022
    ↳", network="testnet")
{'hex':
    ↳'02000000011823f39a8c5f6f27845dd13a65e03fe2ef5108d235e7a36edb6eb267b0459c5a0100000006a473044022
    ↳', 'txid': '6e5c80f600f45acda3c3101128bb3075bf2cf7af4bab0d99c9d856ebfb4b0953',
    ↳'hash': '6e5c80f600f45acda3c3101128bb3075bf2cf7af4bab0d99c9d856ebfb4b0953',
    ↳'size': 223, 'vsize': 223, 'version': 2, 'locktime': 0, 'vin': [{'txid':
    ↳'5a9c45b067b26edb6ea3e735d20851efe23fe0653ad15d84276f5f8c9af32318', 'vout': 1,
    ↳'scriptSig': {'asm':
    ↳'304402207018b7fd1ba6624fe9bb0f16cd65fa243d202e32fdff452699f56465b61ab648022009f0dc1a0a6310924
    ↳027f0dc0894bd690635412af782d05e4f79d3d40bf568978c650f3f1ca1a96cf36', 'hex':
    ↳'47304402207018b7fd1ba6624fe9bb0f16cd65fa243d202e32fdff452699f56465b61ab648022009f0dc1a0a63109
    ↳'}, 'sequence': '4294967295'}], 'vout': [{'value': '0.00010000', 'n': 0,
    ↳'scriptPubKey': {'asm': 'OP_HASH160 9418feed4647e156d6663db3e0cef7c050d03867 OP_
    ↳EQUAL', 'hex': 'a9149418feed4647e156d6663db3e0cef7c050d0386787', 'type': 'p2sh',
    ↳'address': '2N6kHwQy6Ph5EdKNgzGrcW2WhGHKGfmP5ae'}}], {'value': '0.00078644', 'n
    ↳': 1, 'scriptPubKey': {'asm': 'OP_DUP OP_HASH160
    ↳33ecab3d67f0e2bde43e52f41ec1ecbdc73f11f8 OP_EQUALVERIFY OP_CHECKSIG', 'hex':
    ↳'76a91433ecab3d67f0e2bde43e52f41ec1ecbdc73f11f888ac', 'type': 'p2pkh', 'address
    ↳': 'mkFWGt4hT11XS8dJKzRFsTrqjjAwZfQAC'}}]}
```

```
swap.providers.bitcoin.rpc.submit_raw(raw: str, network: str = 'mainnet', headers: dict =
    {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-
    Agent 0.3.0'}, timeout: int = 60)
    → str
```

Submit original Bitcoin raw into blockchain.

Parameters

- **raw** (*str*) – Bitcoin transaction raw.
- **network** (*str*) – Bitcoin network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

- **address** (*str*) – Bitcoin address.
- **network** (*str*) – Bitcoin network, defaults to None.

Returns bool – Bitcoin valid/invalid address.

```
>>> from swap.providers.bitcoin.utils import is_address
>>> is_address(address="mrmtGq2HMMqAogSsGDjCtXUpxrb7rHThFH", network="testnet")
True
```

`swap.providers.bitcoin.utils.is_transaction_raw`(*transaction_raw: str*) → bool
Check Bitcoin transaction raw.

Parameters **transaction_raw** (*str*) – Bitcoin transaction raw.

Returns bool – Bitcoin valid/invalid transaction raw.

```
>>> from swap.providers.bitcoin.utils import is_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTg4OGJlN2VjMDY1MDk3ZDk1NjY0NzYzZjI3NmQ0MjU1NTJkNzM1Z"
↳ "
>>> is_transaction_raw(transaction_raw=transaction_raw)
True
```

`swap.providers.bitcoin.utils.decode_transaction_raw`(*transaction_raw: str*, *offline: bool = True*, *headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}*, *timeout: int = 60*) → dict

Decode Bitcoin transaction raw.

Parameters

- **transaction_raw** (*str*) – Bitcoin transaction raw.
- **offline** (*bool*) – Offline decode, defaults to True.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Decoded Bitcoin transaction raw.

```
>>> from swap.providers.bitcoin.utils import decode_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTg4OGJlN2VjMDY1MDk3ZDk1NjY0NzYzZjI3NmQ0MjU1NTJkNzM1Z"
↳ "
>>> decode_transaction_raw(transaction_raw=transaction_raw)
{'fee': 678, 'type': 'bitcoin_fund_unsigned', 'tx': {'hex':
↳ '020000001888be7ec065097d95664763f276d425552d735fb1d974ae78bf72106dca0f3910100000000ffffffffff'
↳ ', 'txid': 'abc70fd3466aec9478ea3115200a84f993204ad1f614fe08e92ecc5997a0d3ba',
↳ 'hash': 'abc70fd3466aec9478ea3115200a84f993204ad1f614fe08e92ecc5997a0d3ba',
↳ 'size': 117, 'vsize': 117, 'version': 2, 'locktime': 0, 'vin': [{'txid':
↳ '91f3a0dc0621f78be74a971dfb35d75255426d273f766456d9975006ece78b88', 'vout': 1,
↳ 'scriptSig': {'asm': '', 'hex': ''}, 'sequence': '4294967295'}], 'vout': [{
↳ 'value': '0.00010000', 'n': 0, 'scriptPubKey': {'asm': 'OP_HASH160'
↳ '2bb013c3e4beb08421dedcf815cb65a5c388178b OP_EQUAL', 'hex':
↳ 'a9142bb013c3e4beb08421dedcf815cb65a5c388178b87', 'type': 'p2sh', 'address':
↳ '2MwEDybGC34949zgzWX4M9FHmE3crDSUydP'}}, {'value': '0.00974268', 'n': 1,
↳ 'scriptPubKey': {'asm': 'OP_DUP OP_HASH160'
↳ '64a8390b0b1685fcdf2d4b457118dc8da92d5534 OP_EQUALVERIFY OP_CHECKSIG', 'hex':
↳ '76a91464a8390b0b1685fcdf2d4b457118dc8da92d553488ac', 'type': 'p2pkh', 'address
↳ ': 'mphBPzf15cRFcL5tUq6mCbE84XobZ1vg7Q'}}}], 'network': 'testnet'}
```

(continues on next page)

(continued from previous page)

```
swap.providers.bitcoin.utils.submit_transaction_raw(transaction_raw: str, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60) → dict
```

Submit transaction raw to Bitcoin blockchain.

Parameters

- **transaction_raw** (*str*) – Bitcoin transaction raw.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bitcoin submitted transaction id, fee, type and date.

```
>>> from swap.providers.bitcoin.utils import submit_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTg4OGJlN2VjMDY1MDk3ZDk1NjY0NzYzZjI3NmQOMjU1NTJkNm1M1
↳ "
>>> submit_transaction_raw(transaction_raw=transaction_raw)
{'fee': '...', 'type': '...', 'transaction_id': '...', 'network': '...', 'date':
↳ '...'}
```

```
swap.providers.bitcoin.utils.get_address_type(address: str) → str
Get Bitcoin address type.
```

Parameters **address** (*str*) – Bitcoin address.

Returns str – Bitcoin address type (P2PKH, P2SH).

```
>>> from swap.providers.bitcoin.utils import get_address_type
>>> get_address_type(address="mrmtGq2HmMqAogSsGDjCtXUpXrb7rHThFH")
"p2pkh"
```

```
swap.providers.bitcoin.utils.get_address_hash(address: str, script: bool
= False) → Union[str,
btcpy.structs.script.P2pkhScript,
btcpy.structs.script.P2shScript]
```

Get Bitcoin address hash.

Parameters

- **address** (*str*) – Bitcoin address.
- **script** (*bool*) – Return script (P2pkhScript, P2shScript), default to False.

Returns str – Bitcoin address hash.

```
>>> from swap.providers.bitcoin.utils import get_address_hash
>>> get_address_hash(address="mrmtGq2HmMqAogSsGDjCtXUpXrb7rHThFH", script=False)
"7b7c4431a43b612a72f8229935c469f1f6903658"
```


Bytom is a protocol of multiple byte assets. Heterogeneous byte-assets operate in different forms on the Bytom Blockchain and atomic assets (warrants, securities, dividends, bonds, intelligence information, forecasting information and other information that exist in the physical world) can be registered, exchanged, gambled via Bytom.

7.1 Wallet

The implementation of Hierarchical Deterministic (HD) wallets generator for Bytom blockchain.

class `swap.providers.bytom.wallet.Wallet` (*network: str = 'mainnet'*)
Bytom Wallet class.

Parameters `network` (*str*) – Bytom network, defaults to mainnet.

Returns `Wallet` – Bytom wallet instance.

Note: Bytom has only two networks, mainnet, solonet and testnet.

from_entropy (*entropy: str, language: str = 'english', passphrase: Optional[str] = None*) →
swap.providers.bytom.wallet.Wallet
Initiate Bytom wallet from entropy.

Parameters

- **entropy** (*str*) – Bytom wallet entropy.
- **language** (*str*) – Bytom wallet language, default to english.
- **passphrase** (*str*) – Bytom wallet passphrase, default to None.

Returns `Wallet` – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_mnemonic (*mnemonic: str, language: Optional[str] = None, passphrase: Optional[str] = None*)
→ *swap.providers.bytom.wallet.Wallet*
Initialize Bytom wallet from mnemonic.

Parameters

- **mnemonic** (*str*) – Bytom wallet mnemonic.
- **language** (*str*) – Bytom wallet language, default to english.

- **passphrase** (*str*) – Bytom wallet passphrase, default to None.

Returns Wallet – Bytom wallet class instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_mnemonic("indicate warm sock mistake code spot acid ribbon_
↳sing over taxi toast")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_seed (*seed: str*) → *swap.providers.bytom.wallet.Wallet*

Initialize Bytom wallet from seed.

Parameters **seed** (*str*) – Bytom wallet seed.

Returns Wallet – Bytom wallet class instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_seed(
↳"baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03
↳")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_xprivate_key (*xprivate_key: str*) → *swap.providers.bytom.wallet.Wallet*

Initiate Bytom wallet from xprivate key.

Parameters **xprivate_key** (*str*) – Bytom wallet xprivate key.

Returns Wallet – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_xprivate_key(
↳"205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_private_key (*private_key: str*) → *swap.providers.bytom.wallet.Wallet*

Initialize Bytom wallet from private key.

Parameters **private_key** (*str*) – Bytom private key.

Returns Wallet – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_private_key(
↳"e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f
↳")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_path (*path: str*) → *swap.providers.bytom.wallet.Wallet*

Drive Bytom wallet from path.

Parameters **path** (*str*) – Bytom wallet path.

Returns Wallet – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_indexes (*indexes: List[str]*) → *swap.providers.bytom.wallet.Wallet*
Drive Bytom wallet from indexes.

Parameters *indexes* (*list*) – Bytom derivation indexes.

Returns *Wallet* – Bytom wallet class instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_xprivate_key(
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ ")
>>> wallet.from_indexes(["2c000000", "99000000", "01000000", "00000000",
↳ "01000000"])
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

from_index (*index: int, harden: bool = False*) → *swap.providers.bytom.wallet.Wallet*
Drive Bytom wallet from index.

Parameters

- **index** (*int*) – Bytom wallet index.
- **harden** (*bool*) – Use harden, default to False.

Returns *Wallet* – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_index(44)
>>> wallet.from_index(153)
>>> wallet.from_index(1)
>>> wallet.from_index(0)
>>> wallet.from_index(1)
<swap.providers.bytom.wallet.Wallet object at 0x040DA268>
```

clean_derivation () → *swap.providers.bytom.wallet.Wallet*

Clean derivation Bytom wallet.

Returns *Wallet* – Bytom wallet instance.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.indexes()
["2c000000", "99000000", "01000000", "00000000", "01000000"]
>>> wallet.path()
"m/44/153/1/0/1"
>>> wallet.clean_derivation()
>>> wallet.indexes()
[]
```

(continues on next page)

(continued from previous page)

```
>>> wallet.path()
None
```

strength() → Optional[int]
Get Bytom wallet strength.

Returns int – Bytom wallet strength.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.strength()
128
```

entropy() → Optional[str]
Get Bytom wallet entropy.

Returns str – Bytom wallet entropy.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.entropy()
"72fee73846f2d1a5807dc8c953bf79f1"
```

mnemonic() → Optional[str]
Get Bytom wallet mnemonic.

Returns str – Bytom wallet mnemonic.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.mnemonic()
"indicate warm sock mistake code spot acid ribbon sing over taxi toast"
```

passphrase() → Optional[str]
Get Bytom wallet passphrase.

Returns str – Bytom wallet passphrase.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1", passphrase=
↳ "meherett")
>>> wallet.passphrase()
"meherett"
```

language() → Optional[str]
Get Bytom wallet language.

Returns str – Bytom wallet language.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.language()
"english"
```

seed() → Optional[str]
Get Bytom wallet seed.

Returns str – Bytom wallet seed.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.seed()
↪ "baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03"
↪ "
```

path() → Optional[str]
Get Bytom wallet derivation path.

Returns str – Bytom derivation path.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet", change=True, address=3)
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.path()
"m/44/153/1/0/1"
```

indexes() → list
Get Bytom wallet derivation indexes.

Returns list – Bytom derivation indexes.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.indexes()
['2c000000', '99000000', '01000000', '00000000', '01000000']
```

xprivate_key() → Optional[str]
Get Bytom wallet xprivate key.

Returns str – Bytom xprivate key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.xprivate_key()
↪ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718"
↪ "
```

xpublic_key() → Optional[str]
Get Bytom wallet xpublic key.

Returns str – Bytom xpublic key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.xpublic_key()
↪ "16476b7fd68ca2acd92cfc38fa353e75d6103f828276f44d587e660a6bd7a5c5ef4490504bd2b6f9971136718"
↪ "
```

expand_xprivate_key() → Optional[str]

Get Bytom wallet expand xprivate key.

Returns str – Bytom expand xprivate key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.expand_xprivate_key()
↪ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee5102416c643cfb46ab1ae5a524c"
↪ "
```

child_xprivate_key() → Optional[str]

Get Bytom child wallet xprivate key.

Returns str – Bytom child xprivate key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.child_xprivate_key()
↪ "e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f"
↪ "
```

child_xpublic_key() → Optional[str]

Get Bytom child wallet xpublic key.

Returns str – Bytom child xpublic key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.child_xpublic_key()
↪ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e25803ee0a6682fb19e279d8f4f"
↪ "
```

guid() → Optional[str]

Get Bytom wallet Blockcenter GUID.

Returns str – Bytom Blockcenter GUID.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.guid()
↪ "f0ed6ddd-9d6b-49fd-8866-a52d1083a13b"
```

private_key() → str

Get Bytom wallet private key.

Returns str – Bytom private key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.private_key()
↪ "e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f
↪ "
```

public_key() → str

Get Bytom wallet public key.

Returns str – Bytom public key.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.public_key()
"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2"
```

program() → str

Get Bytom wallet control program.

Returns str – Bytom control program.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.program()
"00142cda4f99ea8112e6fa61cdd26157ed6dc408332a"
```

address(network: Optional[str] = 'mainnet') → str

Get Bytom wallet address.

Parameters network (str) – Bytom network, defaults to mainnet.

Returns str – Bytom wallet address.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_indexes(["2c000000", "99000000", "01000000", "00000000",
↪ "01000000"])
>>> wallet.address(network="mainnet")
"bm1q9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7"
```

balance(asset: str = 'XX') → int

Get Bytom wallet balance.

Parameters asset (str) – Bytom asset id, defaults to BTM asset.

Returns int – Bytom wallet balance (NEU amount).

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.balance()
71510800
```

utxos (*asset: str = 'ff', limit: int = 15*) → list
Get Bytom wallet unspent transaction output (UTXO's).

Parameters

- **asset** (*str*) – Bytom asset id, defaults to BTM asset.
- **limit** (*int*) – Limit of UTXO's, default is 15.

Returns list – Bytom unspent transaction outputs.

```
>>> from swap.providers.bytom.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.utxos()
[{'hash': '7c1e20e6ff719176a3ed6f5332ec3ff665ab28754d2511950e591267e0e675df',
↪ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↪ 'amount': 71510800}, {'hash':
↪ '01b07c3523085b75f1e047be3a73b263635d0b86f9b751457a51b26c5a97a110', 'asset
↪ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↪ 'amount': 50000}, {'hash':
↪ 'e46cfecc1f1a26413172ce81c78affb19408e613915642fa5fb04d3b0a4ffa65', 'asset
↪ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↪ 'amount': 100}]
```

7.2 Hash Time Lock Contract (HTLC)

Bytom Hash Time Lock Contract (HTLC).

class swap.providers.bytom.htlc.**HTLC** (*network: str = 'mainnet'*)
Bytom Hash Time Lock Contract (HTLC).

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns HTLC – Bytom HTLC instance.

Note: Bytom has only three networks, mainnet, solonet and testnet.

build_htlc (*secret_hash: str, recipient_public_key: str, sender_public_key: str, sequence: int = 1000, use_script: bool = False*) → swap.providers.bytom.htlc.**HTLC**
Build Bytom Hash Time Lock Contract (HTLC).

Parameters

- **secret_hash** (*str*) – secret sha-256 hash.
- **recipient_public_key** (*str*) – Bytom recipient public key.
- **sender_public_key** (*str*) – Bytom sender public key.

- **sequence** (*int*) – Bytom sequence number (expiration block), defaults to Bytom config sequence.
- **use_script** (*bool*) – Initialize HTLC by using script, default to False.

Returns HTLC – Bytom Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(secret_hash=sha256("Hello Meheret!"), recipient_public_
↳key="3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳sender_public_key=
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2",
↳sequence=1000, use_script=False)
<swap.providers.bytom.htlc.HTLC object at 0x0409DAF0>
```

from_bytecode (*bytecode: str*) → *swap.providers.bytom.htlc.HTLC*

Initialize Bytom Hash Time Lock Contract (HTLC) from bytecode.

Parameters **bytecode** (*str*) – Bytom bytecode.

Returns HTLC – Bytom Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> htlc = HTLC(network="testnet")
>>> bytecode =
↳"02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳"
>>> htlc.from_bytecode(bytecode=bytecode)
<swap.providers.bitcoin.htlc.HTLC object at 0x0409DAF0>
```

bytecode () → *str*

Get Bytom Hash Time Lock Contract (HTLC) bytecode.

Returns *str* – Bytom HTLC bytecode.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.bytecode()

↳"02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳"
```

opcode () → *Optional[str]*

Get Bytom Hash Time Lock Contract (HTLC) OP_Code.

Returns *str* – Bytom HTLC opcode.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
```

(continues on next page)

(continued from previous page)

```
>>> htlc.opcode()
"0xe803 0x91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2,
↳0x3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e,
↳0x3a26da82ead15a80533a02696656b14b5dbfd84eb14790f2e1be5e9e45820eeb DEPTH,
↳0x547a6416000000557aa888537a7cae7cac631f000000537acd9f6972ae7cac FALSE,
↳CHECKPREDICATE"
```

hash() → str

Get Bytom Hash Time Lock Contract (HTLC) hash.

Returns str – Bytom HTLC hash.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.hash()
"4f8f0e88d0a44b3d884b07b6dd4536518ffcbb596a91ca0e6b2f37e96463bbfc"
```

address() → str

Get Bytom Hash Time Lock Contract (HTLC) address.

Returns str – Bytom HTLC address.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.address()
"bm1qf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8"
```

balance(asset: str = 'ff') → int

Get Bytom HTLC balance.

Parameters **asset** (str) – Bytom asset id, defaults to BTM asset.**Returns** int – Bytom HTLC balance (NEU amount).

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.balance(asset=
↳"ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
30000
```

utxos(asset: str = 'ff', limit: int = 15) → list

Get Bytom HTLC unspent transaction output (UTXO's).

Parameters

- **asset** (*str*) – Bytom asset id, defaults to BTM asset.
- **limit** (*int*) – Limit of UTXO's, default is 15.

Returns list – Bytom unspent transaction outputs.

```
>>> from swap.providers.bytom.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳ False)
>>> htlc.utxos(asset=
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
[{'hash': '8a0d861767240a284ebd0320b11b81253727ecdac0c80bc6a88127327c0d8a1',
↳ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}, {'hash':
↳ '76c9ec09f4990122337b1cb9925abc5c5de115065cb1eea7adb7b5fdeb2c6e1e', 'asset
↳ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}, {'hash':
↳ '2637748a967aa5428008aa57159b9795f3aff63b81c72df0575041e7df1efe01', 'asset
↳ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}]
```

7.3 Transaction

Bytom transaction in blockchain network.

class swap.providers.bytom.transaction.**Transaction** (*network: str = 'mainnet'*)
Bytom Transaction.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns Transaction – Bytom transaction instance.

Note: Bytom has only three networks, mainnet, solonet and mainnet.

fee () → int

Get Bitcoin transaction fee.

Returns int – Bitcoin transaction fee.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "bmlq3plwvmvy4qhjmp5zffzmk50aagpujt6f5je85p",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.fee()
10000000
```

hash () → str

Get Bytom transaction hash.

Returns str – Bytom transaction id/hash.

```
>>> from swap.providers.bytom.transaction import FundTransaction
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(
↳ "bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7",
↳ "bmlqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8", 10000)
>>> fund_transaction.hash()
"2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492"
```

json() → dict

Get Bytom transaction json format.

Returns dict – Bytom transaction json format.

```
>>> from swap.providers.bytom.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("mainnet")
>>> refund_transaction.build_transaction(
↳ "bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7",
↳ "481c00212c552fbd537fcc88c1006a69bdd3130f593965f6ff4f91818a1c6e1", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> refund_transaction.json()
{"hash": "2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492",
↳ "status_fail": false, "size": 379, "submission_timestamp": 0, "memo": "",
↳ "inputs": [{"script": "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a",
↳ "address": "bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 2450000000, "type": "spend"}], "outputs": [{"utxo_id":
↳ "5edccebe497893c289121f9e365fdeb34c97008b9eb5a9960fe9541e7923aabc", "script
↳ ":
↳ "01642091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e220ac13c0bb1445423a6
↳ ", "address": "smart contract", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 1000, "type": "control"}, {"utxo_id":
↳ "f8cfbb692db1963be88b09c314adcc9e19d91c6c019aa556fb7cb76ba8ffalfa", "script
↳ ": "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", "address":
↳ "bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 2439999000, "type": "control"}], "fee": 10000000, "balances": [{"asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": "-10001000"}], "types": ["ordinary"]}
```

raw() → str

Get Bytom transaction raw.

Returns str – Bytom transaction raw.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "bmlq3plwvmy4qhjmp5zffzmk50aagpujt6f5je85p",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.raw()
↳ "070100010160015e7f2d7ecec3f61d30d0b2968973a3ac8448f0599ea20dce883b48c903c4d6e87fffffffff
↳ "
```

type() → str

Get Bitcoin signature transaction type.

Returns `str` – Bitcoin signature transaction type.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "bmlq3plwvmy4qhjmp5zffzmk50aagpujt6f5je85p",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.type()
"bitcoin_claim_unsigned"
```

unsigned_datas (*detail: bool = False*) → list

Get Bytom transaction unsigned datas(messages) with instruction.

Parameters `detail` (*bool*) – Bytom unsigned datas to see detail, defaults to False.

Returns list – Bytom transaction unsigned datas.

```
>>> from swap.providers.bytom.transaction import FundTransaction
>>> from swap.providers.bytom.solver import FundSolver
>>> from swap.providers.bytom.wallet import Wallet
>>> sender_wallet = Wallet("mainnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> fund_solver = FundSolver(sender_wallet.xprivate_key())
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(sender_wallet.address(),
↳ "bmlqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8", 10000)
>>> fund_transaction.unsigned_datas(solver=fund_solver)
[{'datas': ['38601bf7ce08dab921916f2c723acca0451d8904649bbec16c2076f1455dd1a2
↳'], 'public_key':
↳ '91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2', 'network
↳': 'mainnet', 'path': 'm/44/153/1/0/1'}]
```

sign (**args, **kwargs*)

Bytom sign unsigned transaction datas.

Parameters

- **private_key** (*str*) – Bytom private key, default to None.
- **xprivate_key** (*str*) – Bytom xprivate key, default to None.
- **account** (*int*) – Bytom derivation account, defaults to 1.
- **change** (*bool*) – Bytom derivation change, defaults to False.
- **address** (*int*) – Bytom derivation address, defaults to 1.
- **path** (*str*) – Bytom derivation path, default to None.
- **indexes** (*list*) – Bytom derivation indexes, default to None.

Returns Transaction – Bytom transaction instance.

```
>>> from pybytom.transaction import Transaction
>>> transaction = Transaction(network="mainnet")
>>> transaction.build_transaction("bmlq9ndylx02syfwd7npehfzx41ddhzqsve2fu6vc7
↳", inputs=[...], outputs=[...])
>>> transaction.sign(xprivate_key)
<pybytom.transaction.transaction.Transaction object at 0x0409DAF0>
```

signatures () → list

Get Bytom transaction signatures(signed datas).

Returns list – Bytom transaction signatures.

```
>>> from swap.providers.bytom.transaction import FundTransaction
>>> from swap.providers.bytom.solver import FundSolver
>>> from swap.providers.bytom.wallet import Wallet
>>> sender_wallet = Wallet("mainnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> fund_solver = FundSolver(sender_wallet.xprivate_key())
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(sender_wallet.address(),
↳ "bmlqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8", 10000)
>>> fund_transaction.sign(solver=fund_solver)
>>> fund_transaction.signatures()
[[
↳ '8ca69a01def05118866681bc7008971efcff40895285297e0d6bd791220a36d6ef85a11abc48438de21f0256c
↳ ']]
```

7.3.1 FundTransaction

```
class swap.providers.bytom.transaction.FundTransaction(network: str =
{'blockcenter':
'https://bcapi.bystack.com/bytom/v3',
'blockmeta':
'https://blockmeta.com/api/v3',
'bytom-core':
'http://localhost:9888',
'mov':
'https://ex.movapi.com/bytom/v3'})
```

Bytom Fund transaction.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns FundTransaction – Bytom fund transaction instance.

Warning: Do not forget to build transaction after initialize fund transaction.

```
build_transaction(address: str, htlc_address: str, amount: int, asset: str =
'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', estimate_fee: bool = True)
→ swap.providers.bytom.transaction.FundTransaction
```

Build Bytom fund transaction.

Parameters

- **address** (*str*) – Bytom sender wallet address.
- **htlc_address** (*str*) – Bytom Hash Time Lock Contract (HTLC) address.
- **amount** (*int*) – Bytom amount to fund.
- **asset** (*str*) – Bytom asset id, defaults to BTM asset.
- **estimate_fee** (*bool*) – Estimate Vapor transaction fee, defaults to True.

Returns FundTransaction – Bytom fund transaction instance.

Build Bytom claim transaction.

Parameters

- **address** (*str*) – Bytom recipient wallet address.
- **transaction_id** (*str*) – Bytom fund transaction id to redeem.
- **amount** (*int*) – Bytom amount to withdraw.
- **asset** (*str*) – Bytom asset id, defaults to BTM asset.
- **estimate_fee** (*bool*) – Estimate Vapor transaction fee, defaults to True.

Returns ClaimTransaction – Bytom claim transaction instance.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(address=
↳ "bmlq3plwvmy4qhjmp5zffzmk50aagpujt6f5je85p", transaction_id=
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd",
↳ amount=10000, asset=
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
<swap.providers.bytom.transaction.ClaimTransaction object at 0x0409DAF0>
```

sign (*solver*: swap.providers.bytom.solver.ClaimSolver) → swap.providers.bytom.transaction.ClaimTransaction
Sign Bytom claim transaction.

Parameters **solver** (bytom.solver.ClaimSolver) – Bytom claim solver.

Returns ClaimTransaction – Bytom claim transaction instance.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> from swap.providers.bytom.solver import ClaimSolver
>>> from swap.providers.bytom.wallet import Wallet, DEFAULT_PATH
>>> recipient_wallet = Wallet("mainnet").from_entropy(
↳ "6bc9e3bae5945876931963c2b3a3b040").from_path(DEFAULT_PATH)
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03"
↳ ""
>>> claim_solver = ClaimSolver(recipient_wallet.xprivate_key(), "Hello_
↳ Meheret!", bytecode=bytecode)
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(recipient_wallet.address(),
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.sign(solver=claim_solver)
<swap.providers.bytom.transaction.ClaimTransaction object at 0x0409DAF0>
```

transaction_raw () → str

Get Bytom claim transaction raw.

Returns str – Bytom claim transaction raw.

```
>>> from swap.providers.bytom.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "bmlq3plwvmy4qhjmp5zffzmk50aagpujt6f5je85p",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.transaction_raw()
```

(continues on next page)

(continued from previous page)

```

>>> refund_solver = RefundSolver(sender_wallet.xprivate_key(),
↳bytecode=bytecode)
>>> refund_transaction = RefundTransaction("mainnet")
>>> refund_transaction.build_transaction(sender_wallet.address(),
↳"481c00212c552fbdf537fcc88c1006a69bdd3130f593965f6ff4f91818a1c6e1", 10000,
↳"ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> refund_transaction.sign(solver=refund_solver)
<swap.providers.bytom.transaction.RefundTransaction object at 0x0409DAF0>

```

transaction_raw() → str

Get Bytom refund transaction raw.

Returns str – Bytom refund transaction raw.

```

>>> from swap.providers.bytom.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("mainnet")
>>> refund_transaction.build_transaction(
↳"bmlq9ndylx02syfwd7npehfzx4lddhzqsve2fu6vc7",
↳"481c00212c552fbdf537fcc88c1006a69bdd3130f593965f6ff4f91818a1c6e1", 10000,
↳"ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> refund_transaction.transaction_raw()

↳"eyJmZWUiOiA2NzgsICJyYXciOiAiMDIwMDAwMDAwMTJjMzkyMjE3NDgzOTA2ZjkwMmU3M2M0YmMzI4NjRkZTU4MzU1IiwiaWF0IjoiMj01b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f99711367189245"
↳"

```

7.4 Solver

Bytom solver.

7.4.1 FundSolver

class swap.providers.bytom.solver.**FundSolver** (*xprivate_key: str, account: int = 1, change: bool = False, address: int = 1, path: Optional[str] = None, indexes: Optional[List[str]] = None*)

Bytom Fund solver.

Parameters

- **xprivate_key** (*str*) – Bytom sender xprivate key.
- **account** (*int*) – Bytom derivation account, defaults to 1.
- **change** (*bool*) – Bytom derivation change, defaults to False.
- **address** (*int*) – Bytom derivation address, defaults to 1.
- **path** (*str*) – Bytom derivation path, defaults to None.
- **indexes** (*list*) – Bytom derivation indexes, defaults to None.

Returns FundSolver – Bytom fund solver instance.

```

>>> from swap.providers.bytom.solver import FundSolver
>>> sender_xprivate_key =
↳"205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f99711367189245"
↳"

```

(continues on next page)

(continued from previous page)

```
>>> fund_solver = FundSolver(xprivate_key=sender_xprivate_key)
<swap.providers.bytom.solver.FundSolver object at 0x03FCCA60>
```

7.4.2 ClaimSolver

```
class swap.providers.bytom.solver.ClaimSolver(xprivate_key: str, secret_key: str, bytecode: str, account: int = 1, change: bool = False, address: int = 1, path: Optional[str] = None, indexes: Optional[List[str]] = None)
```

Bytom Claim solver.

Parameters

- **xprivate_key** (*str*) – Bytom sender xprivate key.
- **secret_key** (*str*) – Secret password/passphrase.
- **bytecode** (*str*) – Bytom witness HTLC bytecode, defaults to None.
- **account** (*int*) – Bytom derivation account, defaults to 1.
- **change** (*bool*) – Bytom derivation change, defaults to False.
- **address** (*int*) – Bytom derivation address, defaults to 1.
- **path** (*str*) – Bytom derivation path, defaults to None.
- **indexes** (*list*) – Bytom derivation indexes, defaults to None.

Returns ClaimSolver – Bytom claim solver instance.

```
>>> from swap.providers.bytom.solver import ClaimSolver
>>> recipient_xprivate_key =
↪ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebcccc2d33577a9f6
↪ "
>>> bytecode =
↪ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa031d45
↪ "
>>> claim_solver = ClaimSolver(xprivate_key=recipient_xprivate_key, secret_key=
↪ "Hello Meheret!", bytecode=bytecode)
<swap.providers.bytom.solver.ClaimSolver object at 0x03FCCA60>
```

7.4.3 RefundSolver

```
class swap.providers.bytom.solver.RefundSolver(xprivate_key: str, bytecode: str, account: int = 1, change: bool = False, address: int = 1, path: Optional[str] = None, indexes: Optional[List[str]] = None)
```

Bytom Refund solver.

Parameters

- **xprivate_key** (*str*) – Bytom sender xprivate key.
- **bytecode** (*str*) – Bytom witness HTLC bytecode, defaults to None.
- **account** (*int*) – Bytom derivation account, defaults to 1.

- **change** (*bool*) – Bytom derivation change, defaults to False.
- **address** (*int*) – Bytom derivation address, defaults to 1.
- **path** (*str*) – Bytom derivation path, defaults to None.
- **indexes** (*list*) – Bytom derivation indexes, defaults to None.

Returns RefundSolver – Bytom refund solver instance.

```
>>> from swap.providers.bytom.solver import RefundSolver
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f99711367189245
↳ "
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa031d45
↳ "
>>> refund_solver = RefundSolver(xprivate_key=sender_xprivate_key,
↳ bytecode=bytecode)
<swap.providers.bytom.solver.RefundSolver object at 0x03FCCA60>
```

7.5 Signature

Bytom signature.

class swap.providers.bytom.signature.**Signature** (*network: str = 'mainnet'*)

Bytom Signature.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns Signature – Bytom signature instance.

Note: Bytom has only three networks, mainnet, solonet and testnet.

fee () → int

Get Bytom transaction fee.

Returns int – Bytom transaction fee.

```
>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZlhlseDAyc3lmd2Q3bnBlaGZ4ejR5ZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.fee()
10000000
```

hash () → str

Get Bytom signature transaction hash.

Returns str – Bytom signature transaction hash or transaction id.

(continued from previous page)

raw() → str

Get Bytom signature transaction raw.

Returns str – Bytom signature transaction raw.

```

>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZS"
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718"
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.raw()

↳ "07010002015f015d82e65f964d3c3532548dfde938462f566c95d3c90e6a3a182a0b3bdae46aa790fffffffff"
↳ ""

```

type() → str

Get Bytom signature transaction type.

Returns str – Bytom signature transaction type.

```

>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import RefundSolver
>>> unsigned_refund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZS"
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718"
↳ ""
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03"
↳ ""
>>> refund_solver = RefundSolver(sender_xprivate_key, bytecode, 1000)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_refund_transaction_raw, refund_solver)
>>> signature.type()
"bytom_refund_signed"

```

sign(*transaction_raw*: str, *solver*: Union[swap.providers.bytom.solver.FundSolver, swap.providers.bytom.solver.ClaimSolver, swap.providers.bytom.solver.RefundSolver]) → Union[swap.providers.bytom.signature.FundSignature, swap.providers.bytom.signature.ClaimSignature, swap.providers.bytom.signature.RefundSignature]

Sign unsigned transaction raw.

Parameters

- **transaction_raw** (str) – Bytom unsigned transaction raw.
- **solver** (bytom.solver.FundSolver, bytom.solver.ClaimSolver, bytom.solver.RefundSolver) – Bytom solver

Returns FundSignature, ClaimSignature, RefundSignature – Bytom signature instance.

```
>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUia0iAxMDAwMDAwMCAwMCAwImFkZlJlc3MiOjAiYm0xcTluZlhlseDAyc3lmd2Q3bnBlaGZ4ejR5ZGRoenFzdmUyZG
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(transaction_raw=unsigned_fund_transaction_raw, solver=fund_
↳ solver)
<swap.providers.bytom.signature.FundSignature object at 0x0409DAF0>
```

unsigned_datas (*args, **kwargs) → list

Get Bytom transaction unsigned datas with instruction.

Returns list – Bytom transaction unsigned datas.

```
>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWUia0iAxMDAwMDAwMCAwMCAwImFkZlJlc3MiOjAiYm0xcTNwbHd2bXZ5NHFOamlwNXpmZnptazUwYWFncHVqdDZm
↳ ""
>>> recipient_xprivate_key =
↳ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebecc2d33577
↳ ""
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳ ""
>>> claim_solver = ClaimSolver(recipient_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_claim_transaction_raw, claim_solver)
>>> signature.unsigned_datas()
[{"datas": [{"5172290a9858a4a07c603c741f6fd8e86715a8a4470eb237d0a2d8325c1706b7
↳ "}], "network": "mainnet", "path": null}, {"datas": [
↳ "e41ab964701f20a23473340b11d5cbcfba9a373cedf284f809c0c61ce7d715da"],
↳ "public_key":
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e", "network
↳ ": "mainnet", "path": "m/44/153/1/0/1"}]
```

signatures () → list

Get Bytom transaction signatures(signed datas).

Returns list – Bytom transaction signatures.

```
>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUia0iAxMDAwMDAwMCAwMCAwImFkZlJlc3MiOjAiYm0xcTluZlhlseDAyc3lmd2Q3bnBlaGZ4ejR5ZGRoenFzdmUyZG
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
```

(continues on next page)

(continued from previous page)

```

>>> signature.signatures()
[[
↳ "00c005bc114ec5f89b49e48526f90312b6f1a5274efd252049880023aeb8e7998c15e0baa4ff10fabbdade702f
↳ "], [
↳ "fbfb123ef062c9068dad22ce28de2a4e72f82076b6f98cb7e0909c11856260e7020aecbdca639f0b6e39d345
↳ "]

```

transaction_raw() → str

Get Bytom signed transaction raw.

Returns str – Bytom signed transaction raw.

```

>>> from swap.providers.bytom.signature import Signature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.transaction_raw()
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "

```

7.5.1 FundSignature

class swap.providers.bytom.signature.**FundSignature** (*network: str = 'mainnet'*)
Bytom Fund signature.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.**Returns** FundSignature – Bytom fund signature instance.

sign (*transaction_raw: str, solver: swap.providers.bytom.solver.FundSolver*) →
swap.providers.bytom.signature.FundSignature
Sign unsigned fund transaction raw.

Parameters

- **transaction_raw** (*str*) – Bytom unsigned fund transaction raw.
- **solver** (*bytom.solver.FundSolver*) – Bytom fund solver.

Returns FundSignature – Bytom fund signature instance.

```

>>> from swap.providers.bytom.signature import FundSignature
>>> from swap.providers.bytom.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)

```

(continues on next page)

(continued from previous page)

```
>>> fund_signature = FundSignature("mainnet")
>>> fund_signature.sign(unsigned_fund_transaction_raw, fund_solver)
<swap.providers.bytom.signature.FundSignature object at 0x0409DAF0>
```

7.5.2 ClaimSignature

class swap.providers.bytom.signature.**ClaimSignature** (*network: str = 'mainnet'*)
Bytom Claim signature.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns ClaimSignature – Bytom claim signature instance.

sign (*transaction_raw: str, solver: swap.providers.bytom.solver.ClaimSolver*) →
swap.providers.bytom.signature.ClaimSignature
Sign unsigned claim transaction raw.

Parameters

- **transaction_raw** (*str*) – Bytom unsigned claim transaction raw.
- **solver** (*bytom.solver.ClaimSolver*) – Bytom claim solver.

Returns ClaimSignature – Bytom claim signature instance.

```
>>> from swap.providers.bytom.signature import ClaimSignature
>>> from swap.providers.bytom.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHZJc3MiOiAiYm0xcTNwbHd2bXZ5NHFoamlwNXpmZnptazUwYWFnchVqdDZmN
↳ "
>>> recipient_xprivate_key =
↳ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebecc2d33577
↳ "
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳ "
>>> claim_solver = ClaimSolver(recipient_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> claim_signature = ClaimSignature("mainnet")
>>> claim_signature.sign(transaction_raw=unsigned_claim_transaction_raw,
↳ solver=claim_solver)
<swap.providers.bytom.signature.ClaimSignature object at 0x0409DAF0>
```

7.5.3 RefundSignature

class swap.providers.bytom.signature.**RefundSignature** (*network: str = 'mainnet'*)
Bytom Refund signature.

Parameters **network** (*str*) – Bytom network, defaults to mainnet.

Returns RefundSignature – Bytom claim signature instance.

sign (*transaction_raw: str, solver: swap.providers.bytom.solver.RefundSolver*) →
swap.providers.bytom.signature.RefundSignature
Sign unsigned refund transaction raw.

Parameters


```
swap.providers.bytom.rpc.get_utxos(program: str, network: str = 'mainnet', asset: str =
'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', limit: int = 15,
by: str = 'amount', order: str = 'desc', headers: dict
= {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent
0.3.0'}, timeout: int = 60) → list
```

Get Bytom unspent transaction outputs (UTXO's).

Parameters

- **program** (*str*) – Bytom control program.
- **network** (*str*) – Bytom network, defaults to mainnet.
- **asset** (*str*) – Bytom asset id, defaults to BTM asset.
- **limit** (*int*) – Bytom utxo's limit, defaults to 15.
- **by** (*str*) – Sort by, defaults to amount.
- **order** (*str*) – Sort order, defaults to desc.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns list – Bytom unspent transaction outputs (UTXO's).

```
>>> from swap.providers.bytom.rpc import get_utxos
>>> get_utxos(program="00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", network=
↳ "mainnet")
[{'hash': '7c1e20e6ff719176a3ed6f5332ec3ff665ab28754d2511950e591267e0e675df',
↳ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 71510800}, {'hash':
↳ '01b07c3523085b75f1e047be3a73b263635d0b86f9b751457a51b26c5a97a110', 'asset':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount':
↳ 50000}, {'hash':
↳ 'e46cfeccl1f1a26413172ce81c78affb19408e613915642fa5fb04d3b0a4ffa65', 'asset':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount':
↳ 100}]
```

```
swap.providers.bytom.rpc.estimate_transaction_fee(address: str, amount:
int, asset: str =
'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
confirmations: int = 1, network:
str = 'mainnet', headers: dict
= {'accept': 'application/json',
'content-type': 'application/json;
charset=utf-8', 'user-agent': 'Swap
User-Agent 0.3.0'}, timeout: int =
60) → int
```

Estimate Bytom transaction fee.

Parameters

- **address** (*str*) – Bytom address.
- **amount** (*int*) – Bytom amount (NEU amount).
- **asset** (*str*) – Bytom asset id, default to BTM asset.
- **confirmations** (*int*) – Bytom confirmations, default to 1.
- **network** (*str*) – Bytom network, defaults to solonet.

- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – request timeout, default to 60.

Returns *str* – Estimated transaction fee (NEU amount).

```
>>> from swap.providers.bytom.rpc import estimate_transaction_fee
>>> from swap.providers.bytom.assets import BTM as ASSET
>>> estimate_transaction_fee(address="bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7",
↳ asset=ASSET, amount=100_000, confirmations=100, network="mainnet")
449000
```

`swap.providers.bytom.rpc.build_transaction`(*address: str, transaction: dict, network: str* = 'mainnet', *headers: dict* = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, *timeout: int* = 60) → *dict*

Build Bytom transaction.

Parameters

- **address** (*str*) – Bytom address.
- **transaction** (*dict*) – Bytom transaction (inputs, outputs, fee, confirmations & forbid_chain_tx).
- **network** (*str*) – Bytom network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns *dict* – Bytom built transaction.

```
>>> from swap.providers.bytom.rpc import build_transaction
>>> build_transaction(address="bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7",
↳ transaction={"fee": "0.1", "confirmations": 1, "inputs": [{"type": "spend_wallet",
↳ "amount": "0.0001", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff"}, "outputs":
↳ [{"type": "control_address", "amount": "0.0001", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "address":
↳ "bmlqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8"}]}, network=
↳ "mainnet")
{'tx': {'hash': '5d4ae68487953863783599045f99eb8740b5745376ed8d8926d68de695e72476
↳ ', 'status': True, 'size': 404, 'submission_timestamp': 0, 'memo': '', 'inputs
↳ ': [{"script": '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7', 'asset': {'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals':
↳ 0, 'symbol': 'BTM'}, 'amount': '0.0005', 'type': 'spend'}, {'script':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7', 'asset': {'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals':
↳ 0, 'symbol': 'BTM'}, 'amount': '0.715108', 'type': 'spend'}]}, 'outputs': [{
↳ 'utxo_id': '0d5c097b8e75f711765ff63017fe8a4a987d8b50f7ca3a5d1873120af5f46116',
↳ 'script': '00204f8f0e88d0a44b3d884b07b6dd4536518ffcbb596a91ca0e6b2f37e96463bbfc
↳ ', 'address': 'bmlqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07q3yf5q8',
↳ 'asset': {'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals':
↳ 0, 'symbol': 'BTM'}, 'amount': '0.0001', 'type': 'control'}, {'utxo_id':
↳ 'c49da44ef15d227ca978191e91d5d8915a3f92baf6b5778b7377deb2bddca554', 'script':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7', 'asset': {'asset_id': (continues on next page)
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals':
↳ 0, 'symbol': 'BTM'}, 'amount': '0.615908', 'type': 'control'}]}, 'fee': '0.0996',
```

(continued from previous page)

```
swap.providers.bytom.rpc.get_transaction(transaction_id: str, network: str = 'mainnet',
                                       headers: dict = {'accept': 'application/json',
                                       'content-type': 'application/json; charset=utf-8',
                                       'user-agent': 'Swap User-Agent 0.3.0'}, timeout:
                                       int = 60) → dict
```

Get Bytom transaction detail.

Parameters

- **transaction_id** (*str*) – Bytom transaction id.
- **network** (*str*) – Bytom network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bytom transaction detail.

```
>>> from swap.providers.bytom.rpc import get_transaction
>>> get_transaction(transaction_id=
↳ "bc935995cb3408b51aa3d05e7e77226840eb68340b229f9c561edae31ebc8b95", network=
↳ "mainnet")
{'id': 'bc935995cb3408b51aa3d05e7e77226840eb68340b229f9c561edae31ebc8b95',
↳ 'timestamp': 1524765978, 'block_height': 3487, 'trx_amount': 41249562600, 'trx_
↳ fee': 437400, 'status_fail': False, 'coinbase': False, 'size': 332, 'chain_
↳ status': 'mainnet', 'time_range': 0, 'index_id': 3489, 'mux_id':
↳ '305a28d8d34b40c65936810f9e9c1f8bc9c793ec2e72c70f9203fbbbeb0a56db9', 'inputs': [{
↳ 'txtype': 'spend', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount': 4
↳ 1250000000, 'control_program': '0014151df3db084d909ccb55d45d4e59db2e17e5f237',
↳ 'address': 'bm1qz5wl8kcgfkgfej6463w5ukwm9ct7tu3ht8p7te', 'spent_output_id':
↳ '6def8e6a7c29ccff4c5596a37a6698b71f392bf713bc67bb3fa0af54bf50f815', 'input_id':
↳ 'fb226e3ad39e38341f0d232c910065b76ef7c267faa3ea4e49a31836405b6747', 'witness_
↳ arguments': [
↳ '1848cb550620b971fd244eb625ccf4507ccd9944da65b47674550397c983247e1bd3ff880782beca963a81c34c17c
↳ ', '268402537b02d91fafdcdeb6eda3aa542548d77cd6cccb38ecd7ea7ce8a22cf7'], 'asset_
↳ name': 'BTM', 'asset_definition': '{}', 'cross_chain_asset': False, 'asset_
↳ decimals': 8}], 'outputs': [{'txtype': 'control', 'id':
↳ 'a8a7b5363379dee8ff77da7c4acf63dc3469a79ebaade079fc1842543964c6e9', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount': 4
↳ 1239562600, 'control_program': '0014fc22634a713acle6f831c56184f847b7546fbda4',
↳ 'address': 'bm1qls3xxjn38tq7d7p3c4scf7z8ka2xl0dyppj52k', 'asset_name': 'BTM',
↳ 'asset_definition': '{}', 'cross_chain_asset': False, 'position': 0, 'asset_
↳ decimals': 8}, {'txtype': 'control', 'id':
↳ '84287fb5b2b461dbd3b937a9013d89c0d54a21768e31fb8345b02d57a7992533', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount': 1
↳ 0000000, 'control_program': '00140e43a92a9e8aca788eb1551c316448c2e3f78215',
↳ 'address': 'bm1qpep6j2573t983r4325wrzezgct3l0qs4q04pem', 'asset_name': 'BTM',
↳ 'asset_definition': '{}', 'cross_chain_asset': False, 'position': 1, 'asset_
↳ decimals': 8}], 'confirmations': 558509}
```

```
swap.providers.bytom.rpc.decode_raw(raw: str, network: str = 'mainnet', headers: dict
= {'accept': 'application/json', 'content-type': 'applic
ation/json; charset=utf-8', 'user-agent': 'Swap User-Agent
0.3.0'}, timeout: int = 60) → dict
```

Decode original Bytom raw.

Parameters

- **raw** (*str*) – Bytom transaction raw.
- **network** (*str*) – Bytom network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bytom decoded transaction raw.

```
>>> from swap.providers.bytom.rpc import decode_raw
>>> decode_raw(raw=
↳ "07010002015e015c88650475abf87eb364f93c608db879ad71643fbc7725ded246e8883e79c75a78ffffffffffffff",
↳ ", network="testnet")
{'tx_id': '5d4ae68487953863783599045f99eb8740b5745376ed8d8926d68de695e72476',
↳ 'version': 1, 'size': 404, 'time_range': 0, 'inputs': [{'type': 'spend', 'asset_
↳ id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'asset_
↳ definition': {}, 'amount': 50000, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7', 'spent_output_id':
↳ '01b07c3523085b75f1e047be3a73b263635d0b86f9b751457a51b26c5a97a110', 'input_id':
↳ 'de193c78772c93356f81a5061a90d8dcfba84d03ae4d78b2a57a9201f88c38af', 'witness_
↳ arguments': ['91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2
↳'], 'sign_data':
↳ 'a5da2ae06bfaea9854423fe9cc544d775854cf57827c8c2ab606418452d30209'}, {'type':
↳ 'spend', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'asset_
↳ definition': {}, 'amount': 71510800, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7', 'spent_output_id':
↳ '7c1e20e6ff719176a3ed6f5332ec3ff665ab28754d2511950e591267e0e675df', 'input_id':
↳ 'de2c7bcf9caf00f78ca8e316cf37cf88c86b0457e47cf58e2465d783151abd0e', 'witness_
↳ arguments': ['91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2
↳'], 'sign_data':
↳ '3e44203712c4e981783810875fa67f2efe0afda38afe229fd09da0d113c3d885'}], 'outputs
↳ ': [{'type': 'control', 'id':
↳ '0d5c097b8e75f711765ff63017fe8a4a987d8b50f7ca3a5d1873120af5f46116', 'position': 0,
↳ 'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'asset_definition': {}, 'amount': 10000, 'control_program':
↳ '00204f8f0e88d0a44b3d884b07b6dd4536518ffcb596a91ca0e6b2f37e96463bbfc', 'address
↳ ': 'bmlqf78sazxs539nmzqtq7md63fk2x81ew6ed2gu5rnt9um7jerrh07q3yf5q8'}, {'type':
↳ 'control', 'id':
↳ 'c49da44ef15d227ca978191e91d5d8915a3f92baf6b5778b7377deb2bddca554', 'position': 1,
↳ 'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'asset_definition': {}, 'amount': 61590800, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'bmlq9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7'}], 'fee': 9960000}
```

`swap.providers.bytom.rpc.submit_raw` (*address: str, raw: str, signatures: list, network: str = 'mainnet', headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60) → str*

Submit original Bytom raw into blockchain.

Parameters

- **address** (*str*) – Bytom address.

- **raw** (*str*) – Bytom transaction raw.
- **signatures** (*list*) – Bytom signed message datas.
- **network** (*str*) – Bytom network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns *str* – Bytom submitted transaction id/hash.

```
>>> from swap.providers.bytom.rpc import submit_raw
>>> submit_raw(address="bm1q9ndylx02syfwd7npehfz41ddhzqsve2fu6vc7", raw=
↳ "07010002015e015c88650475abf87eb364f93c608db879ad71643fbc7725ded246e8883e79c75a78ffffffffffffff
↳ ", signatures=[[
↳ "f8466336a79d166e47fb5d64f1e7ec01b203b59b3ee86686492bd1e4d0bdd642dfe4a575049071a052a441635c336
↳ "], [
↳ "ebf33fbda5c2f3d144e90c3b763b1e7e42d501e595216fcd2b310b089918bae2ef4c7b8a2e1f650ee741578aba796
↳ "]], network="mainnet")
"2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492"
```

7.7 Utils

Bytom Utils.

`swap.providers.bytom.utils.amount_converter` (*amount: Union[int, float]*, *symbol: str = 'NEU2BTM'*) → *Union[int, float]*

Bytom amount converter

Parameters

- **amount** (*int*, *float*) – Bytom amount.
- **symbol** (*str*) – Bytom symbol, default to NEU2BTM.

Returns *int*, *float* – BTM asset amount.

```
>>> from swap.providers.bytom.utils import amount_converter
>>> amount_converter(amount=10_000_000, symbol="NEU2BTM")
0.1
```

`swap.providers.bytom.utils.is_network` (*network: str*) → *bool*

Check Bytom network.

Parameters **network** (*str*) – Bytom network.

Returns *bool* – Bytom valid/invalid network.

```
>>> from swap.providers.bytom.utils import is_network
>>> is_network(network="solonet")
True
```

`swap.providers.bytom.utils.is_address` (*address: str*, *network: Optional[str] = None*) → *bool*

Check Bytom address.

Parameters

- **address** (*str*) – Bytom address.
- **network** (*str*) – Bytom network, defaults to None.

Returns bool – Bytom valid/invalid address.

```
>>> from swap.providers.bytom.utils import is_address
>>> is_address(address="bm1q9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7", network=
↳ "mainnet")
True
```

`swap.providers.bytom.utils.is_transaction_raw(transaction_raw: str) → bool`
Check Bytom transaction raw.

Parameters `transaction_raw` (*str*) – Bytom transaction raw.

Returns bool – Bytom valid/invalid transaction raw.

```
>>> from swap.providers.bytom.utils import is_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCAwImFkZHZJLc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG51dTbwenAyNGRrZmZlbHlzoHpj
↳ "
>>> is_transaction_raw(transaction_raw=transaction_raw)
True
```

`swap.providers.bytom.utils.decode_transaction_raw(transaction_raw: str, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60) → dict`

Decode Bytom transaction raw.

Parameters

- **transaction_raw** (*str*) – Bytom transaction raw.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Decoded Bytom transaction raw.

```
>>> from swap.providers.bytom.utils import decode_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCAwImFkZHZJLc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG51dTbwenAyNGRrZmZlbHlzoHpj
↳ "
>>> decode_transaction_raw(transaction_raw=transaction_raw)
{'fee': ..., 'type': '...', 'address': '...', 'transaction': {...}, 'unsigned_
↳ datas': [...], 'signatures': [...], 'network': '...'}
```

`swap.providers.bytom.utils.submit_transaction_raw(transaction_raw: str, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60) → dict`

Submit Bytom transaction raw.

Parameters

- **transaction_raw** (*str*) – Bytom transaction raw.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Bytom submitted transaction id, fee, type and date.

```
>>> from swap.providers.bytom.utils import submit_transaction_raw
>>> transaction_raw =
↪ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHZJlc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG51dTBwenAyNGRrZmZlbHlzoHpj
↪ "
>>> submit_transaction_raw(transaction_raw=transaction_raw)
{'fee': ..., 'type': '...', 'transaction_id': '...', 'network': '...', 'date': '..
↪ .}'
```

`swap.providers.bytom.utils.get_address_type` (*address: str*) → Optional[str]
Get Bytom address type.

Parameters *address* (*str*) – Bytom address.

Returns *str* – Bytom address type (P2WPKH, P2WSH).

```
>>> from swap.providers.bytom.utils import get_address_type
>>> get_address_type(address="bm1q9ndylx02syfwd7npehfzx4lddhzqsve2fu6vc7")
"p2wpkh"
```


Vapor is a sidechain of Bytom blockchain.

8.1 Wallet

The implementation of Hierarchical Deterministic (HD) wallets generator for Vapor blockchain.

class `swap.providers.vapor.wallet.Wallet` (*network: str = 'mainnet'*)
Vapor Wallet class.

Parameters `network` (*str*) – Vapor network, defaults to mainnet.

Returns `Wallet` – Vapor wallet instance.

Note: Vapor has only two networks, mainnet, solonet and testnet.

from_entropy (*entropy: str, language: str = 'english', passphrase: Optional[str] = None*) →
swap.providers.vapor.wallet.Wallet
Initiate Vapor wallet from entropy.

Parameters

- **entropy** (*str*) – Vapor wallet entropy.
- **language** (*str*) – Vapor wallet language, default to english.
- **passphrase** (*str*) – Vapor wallet passphrase, default to None.

Returns `Wallet` – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_mnemonic (*mnemonic: str, language: Optional[str] = None, passphrase: Optional[str] = None*)
→ *swap.providers.vapor.wallet.Wallet*
Initialize Vapor wallet from mnemonic.

Parameters

- **mnemonic** (*str*) – Vapor wallet mnemonic.
- **language** (*str*) – Vapor wallet language, default to english.
- **passphrase** (*str*) – Vapor wallet passphrase, default to None.

Returns Wallet – Vapor wallet class instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_mnemonic("indicate warm sock mistake code spot acid ribbon_
↳sing over taxi toast")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_seed (*seed: str*) → *swap.providers.vapor.wallet.Wallet*
Initialize Vapor wallet from seed.

Parameters *seed* (*str*) – Vapor wallet seed.

Returns Wallet – Vapor wallet class instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_seed(
↳"baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03
↳")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_xprivate_key (*xprivate_key: str*) → *swap.providers.vapor.wallet.Wallet*
Initiate Vapor wallet from xprivate key.

Parameters *xprivate_key* (*str*) – Vapor wallet xprivate key.

Returns Wallet – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_xprivate_key(
↳"205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_private_key (*private_key: str*) → *swap.providers.vapor.wallet.Wallet*
Initialize Vapor wallet from private key.

Parameters *private_key* (*str*) – Vapor private key.

Returns Wallet – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_private_key(
↳"e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f
↳")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_path (*path: str*) → *swap.providers.vapor.wallet.Wallet*
Drive Vapor wallet from path.

Parameters *path* (*str*) – Vapor wallet path.

Returns Wallet – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
```

(continues on next page)

(continued from previous page)

```
>>> wallet.from_path("m/44/153/1/0/1")
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_indexes (*indexes: List[str]*) → *swap.providers.vapor.wallet.Wallet*
Drive Vapor wallet from indexes.

Parameters *indexes* (*list*) – Vapor derivation indexes.

Returns *Wallet* – Vapor wallet class instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_xprivate_key(
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ ")
>>> wallet.from_indexes(["2c000000", "99000000", "01000000", "00000000",
↳ "01000000"])
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

from_index (*index: int, harden: bool = False*) → *swap.providers.vapor.wallet.Wallet*
Drive Vapor wallet from index.

Parameters

- **index** (*int*) – Vapor wallet index.
- **harden** (*bool*) – Use harden, default to False.

Returns *Wallet* – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_index(44)
>>> wallet.from_index(153)
>>> wallet.from_index(1)
>>> wallet.from_index(0)
>>> wallet.from_index(1)
<swap.providers.vapor.wallet.Wallet object at 0x040DA268>
```

clean_derivation () → *swap.providers.vapor.wallet.Wallet*
Clean derivation Vapor wallet.

Returns *Wallet* – Vapor wallet instance.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.indexes()
["2c000000", "99000000", "01000000", "00000000", "01000000"]
>>> wallet.path()
"m/44/153/1/0/1"
>>> wallet.clean_derivation()
>>> wallet.indexes()
[]
>>> wallet.path()
None
```

strength() → Optional[int]
Get Vapor wallet strength.

Returns int – Vapor wallet strength.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.strength()
128
```

entropy() → Optional[str]
Get Vapor wallet entropy.

Returns str – Vapor wallet entropy.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.entropy()
"72fee73846f2d1a5807dc8c953bf79f1"
```

mnemonic() → Optional[str]
Get Vapor wallet mnemonic.

Returns str – Vapor wallet mnemonic.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.mnemonic()
"indicate warm sock mistake code spot acid ribbon sing over taxi toast"
```

passphrase() → Optional[str]
Get Vapor wallet passphrase.

Returns str – Vapor wallet passphrase.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1", passphrase=
↳ "meherett")
>>> wallet.passphrase()
"meherett"
```

language() → Optional[str]
Get Vapor wallet language.

Returns str – Vapor wallet language.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.language()
"english"
```

seed() → Optional[str]
Get Vapor wallet seed.

Returns str – Vapor wallet seed.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.seed()

↪ "baff3e1fe60e1f2a2d840d304acc98d1818140c79354a353b400fb019bfb256bc392d7aa9047adff1f14bce03
↪ "

```

path() → Optional[str]
Get Vapor wallet derivation path.

Returns str – Vapor derivation path.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet", change=True, address=3)
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.path()
"m/44/153/1/0/1"

```

indexes() → list
Get Vapor wallet derivation indexes.

Returns list – Vapor derivation indexes.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.indexes()
['2c000000', '99000000', '01000000', '00000000', '01000000']

```

xprivate_key() → Optional[str]
Get Vapor wallet xprivate key.

Returns str – Vapor xprivate key.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.xprivate_key()

↪ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↪ "

```

xpublic_key() → Optional[str]
Get Vapor wallet xpublic key.

Returns str – Vapor xpublic key.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.xpublic_key()

↪ "16476b7fd68ca2acd92cfc38fa353e75d6103f828276f44d587e660a6bd7a5c5ef4490504bd2b6f9971136718
↪ "

```

expand_xprivate_key() → Optional[str]

Get Vapor wallet expand xprivate key.

Returns str – Vapor expand xprivate key.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.expand_xprivate_key()
↪ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee5102416c643cfb46ab1ae5a524c
↪ "
```

child_xprivate_key() → Optional[str]

Get Vapor child wallet xprivate key.

Returns str – Vapor child xprivate key.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.child_xprivate_key()
↪ "e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f
↪ "
```

child_xpublic_key() → Optional[str]

Get Vapor child wallet xpublic key.

Returns str – Vapor child xpublic key.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.child_xpublic_key()
↪ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e25803ee0a6682fb19e279d8f4f
↪ "
```

guid() → Optional[str]

Get Vapor wallet Blockcenter GUID.

Returns str – Vapor Blockcenter GUID.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.guid()
↪ "f0ed6ddd-9d6b-49fd-8866-a52d1083a13b"
```

private_key() → str

Get Vapor wallet private key.

Returns str – Vapor private key.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
```

(continues on next page)

(continued from previous page)

```

>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.private_key()

↪ "e07af52746e7cccd0a7d1fba6651a6f474bada481f34b1c5bab5e2d71e36ee515803ee0a6682fb19e279d8f4f4"
↪ "

```

public_key() → str

Get Vapor wallet public key.

Returns str – Vapor public key.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.public_key()

"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2"

```

program() → str

Get Vapor wallet control program.

Returns str – Vapor control program.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.program()

"00142cda4f99ea8112e6fa61cdd26157ed6dc408332a"

```

address (network: Optional[str] = 'mainnet') → str

Get Vapor wallet address.

Parameters **network** (str) – Vapor network, defaults to mainnet.**Returns** str – Vapor wallet address.

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_indexes(["2c000000", "99000000", "01000000", "00000000",
↪ "01000000"])
>>> wallet.address(network="mainnet")

"vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag"

```

balance (asset: str = '////////////////////////////////////') → int

Get Vapor wallet balance.

Parameters **asset** (str) – Vapor asset id, defaults to BTM asset.**Returns** int – Vapor wallet balance (NEU amount).

```

>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.balance()

47000000

```

utxos (*asset: str = 'ff', limit: int = 15*) → list
 Get Vapor wallet unspent transaction output (UTXO's).

Parameters

- **asset** (*str*) – Vapor asset id, defaults to BTM asset.
- **limit** (*int*) – Limit of UTXO's, default is 15.

Returns list – Vapor unspent transaction outputs.

```
>>> from swap.providers.vapor.wallet import Wallet
>>> wallet = Wallet(network="mainnet")
>>> wallet.from_entropy("72fee73846f2d1a5807dc8c953bf79f1")
>>> wallet.from_path("m/44/153/1/0/1")
>>> wallet.utxos()
[{'hash': '4e2a17b01b9307107f0abb48ef757bec56befc74b903cfdb763981943bbe318b',
  ↪ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
  ↪ 'amount': 47000000}]
```

8.2 Hash Time Lock Contract (HTLC)

Vapor Hash Time Lock Contract (HTLC).

class swap.providers.vapor.htlc.**HTLC** (*network: str = 'mainnet'*)
 Vapor Hash Time Lock Contract (HTLC).

Parameters **network** (*str*) – Vapor network, defaults to mainnet.

Returns HTLC – Vapor HTLC instance.

Note: Vapor has only three networks, mainnet, solonet and testnet.

build_htlc (*secret_hash: str, recipient_public_key: str, sender_public_key: str, sequence: int = 1000, use_script: bool = False*) → *swap.providers.vapor.htlc.HTLC*
 Build Vapor Hash Time Lock Contract (HTLC).

Parameters

- **secret_hash** (*str*) – secret sha-256 hash.
- **recipient_public_key** (*str*) – Vapor recipient public key.
- **sender_public_key** (*str*) – Vapor sender public key.
- **sequence** (*int*) – Vapor sequence number(expiration block), defaults to Vapor config sequence.
- **use_script** (*bool*) – Initialize HTLC by using script, default to False.

Returns HTLC – Vapor Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
```

(continues on next page)

(continued from previous page)

```
>>> htlc.build_htlc(secret_hash=sha256("Hello Meheret!"), recipient_public_
↳key="3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳sender_public_key=
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2",
↳sequence=1000, use_script=False)
<swap.providers.vapor.htlc.HTLC object at 0x0409DAF0>
```

from_bytecode (bytecode: str) → swap.providers.vapor.htlc.HTLC
Initialize Vapor Hash Time Lock Contract (HTLC) from bytecode.

Parameters **bytecode** (str) – Vapor bytecode.

Returns HTLC – Vapor Hash Time Lock Contract (HTLC) instance.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> htlc = HTLC(network="testnet")
>>> bytecode =
↳"02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳"
>>> htlc.from_bytecode(bytecode=bytecode)
<swap.providers.bitcoin.htlc.HTLC object at 0x0409DAF0>
```

bytecode () → str
Get Vapor Hash Time Lock Contract (HTLC) bytecode.

Returns str – Vapor HTLC bytecode.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.bytecode()
↳"02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳"
```

opcode () → Optional[str]
Get Vapor Hash Time Lock Contract (HTLC) OP_Code.

Returns str – Vapor HTLC opcode.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳"3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳"91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳False)
>>> htlc.opcode()
"0xe803 0x91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2
↳0x3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e
↳0x3a26da82ead15a80533a02696656b14b5dbfd84eb14790f2e1be5e9e45820eeb DEPTH
↳0x547a6416000000557aa888537a7cae7cac631f000000537acd9f6972ae7cac FALSE
↳CHECKPREDICATE"
```

hash () → str

Get Vapor Hash Time Lock Contract (HTLC) hash.

Returns str – Vapor HTLC hash.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳ False)
>>> htlc.hash()
"4f8f0e88d0a44b3d884b07b6dd4536518ffcb596a91ca0e6b2f37e96463bbfc"
```

address () → str

Get Vapor Hash Time Lock Contract (HTLC) address.

Returns str – Vapor HTLC address.

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳ False)
>>> htlc.address()
"vplqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37"
```

balance (asset: str = 'ff') → int

Get Vapor HTLC balance.

Parameters **asset** (str) – Vapor asset id, defaults to BTM asset.

Returns int – Vapor HTLC balance (NEU amount).

```
>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳ False)
>>> htlc.balance(asset=
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
30000
```

utxos (asset: str = 'ff', limit: int = 15) → list

Get Vapor HTLC unspent transaction output (UTXO's).

Parameters

- **asset** (str) – Vapor asset id, defaults to BTM asset.
- **limit** (int) – Limit of UTXO's, default is 15.

Returns list – Vapor unspent transaction outputs.

```

>>> from swap.providers.vapor.htlc import HTLC
>>> from swap.utils import sha256
>>> htlc = HTLC(network="mainnet")
>>> htlc.build_htlc(sha256("Hello Meheret!"),
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e",
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2", 1000,
↳ False)
>>> htlc.utxos(asset=
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
[{'hash': '8a0d861767240a284ebed0320b11b81253727ecdac0c80bc6a88127327c0d8a1',
↳ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}, {'hash':
↳ '76c9ec09f4990122337b1cb9925abc5c5de115065cb1eea7adb7b5fdeb2c6e1e', 'asset
↳ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}, {'hash':
↳ '2637748a967aa5428008aa57159b9795f3aff63b81c72df0575041e7df1efe01', 'asset
↳ ': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000}]

```

8.3 Transaction

Bitcoin transaction in blockchain network.

class swap.providers.vapor.transaction.Transaction (network: str = 'mainnet')

Vapor Transaction.

Parameters network (str) – Vapor network, defaults to mainnet.

Returns Transaction – Vapor transaction instance.

Note: Vapor has only three networks, mainnet, solonet and mainnet.

fee () → int

Get Bitcoin transaction fee.

Returns int – Bitcoin transaction fee.

```

>>> from swap.providers.vapor.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "vp1q3plwvmvy4qhjmp5zffzmk50aagpujt6flnf63h",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.fee()
10000000

```

hash () → str

Get Vapor transaction hash.

Returns str – Vapor transaction id/hash.

```

>>> from swap.providers.vapor.transaction import FundTransaction
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(
↳ "vp1q9ndylx02syfwd7npehfxz41ddhzqsve2za23ag",
↳ "vp1qf78sazxs539nmztlq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37", 10000)

```

(continues on next page)

(continued from previous page)

```
>>> fund_transaction.hash()
"2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492"
```

json() → dict

Get Vapor transaction json format.

Returns dict – Vapor transaction json format.

```
>>> from swap.providers.vapor.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("mainnet")
>>> refund_transaction.build_transaction(
↳ "vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag",
↳ "481c00212c552fbdf537fcc88c1006a69bdd3130f593965f6fff4f91818a1c6e1", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> refund_transaction.json()
{"hash": "2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492",
↳ "status_fail": false, "size": 379, "submission_timestamp": 0, "memo": "",
↳ "inputs": [{"script": "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a",
↳ "address": "vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 2450000000, "type": "spend"}], "outputs": [{"utxo_id":
↳ "5edccebe497893c289121f9e365fdeb34c97008b9eb5a9960fe9541e7923aabc", "script
↳ ":
↳ "01642091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e220ac13c0bb1445423a6
↳ ", "address": "smart contract", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 1000, "type": "control"}, {"utxo_id":
↳ "f8cfbb692db1963be88b09c314adcc9e19d91c6c019aa556fb7cb76ba8ffa1fa", "script
↳ ": "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", "address":
↳ "vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag", "asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": 2439999000, "type": "control"}], "fee": 10000000, "balances": [{"asset":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "amount
↳ ": "-10001000"}], "types": ["ordinary"]}
```

raw() → str

Get Vapor transaction raw.

Returns str – Vapor transaction raw.

```
>>> from swap.providers.vapor.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "vplq3plwvmy4qhjmp5zffzmk50aagpujt6flnf63h",
↳ "1006a6f537fcc4888c65f6fff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.raw()
↳ "070100010160015e7f2d7ecec3f61d30d0b2968973a3ac8448f0599ea20dce883b48c903c4d6e87fffffffffff
↳ "
```

type() → str

Get Bitcoin signature transaction type.

Returns str – Bitcoin signature transaction type.

```
>>> from swap.providers.vapor.transaction import ClaimTransaction
>>> claim_transaction = ClaimTransaction("mainnet")
>>> claim_transaction.build_transaction(
↳ "vp1q3plwvmvy4qhjmp5zffzmk50aagpujt6flnf63h",
↳ "1006a6f537fcc4888c65f6ff4f91818a1c6e19bdd3130f59391c00212c552fbd", 10000,
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
>>> claim_transaction.type()
"bitcoin_claim_unsigned"
```

unsigned_datas (*detail: bool = False*) → list

Get Vapor transaction unsigned datas(messages) with instruction.

Parameters **detail** (*bool*) – Vapor unsigned datas to see detail, defaults to False.

Returns list – Vapor transaction unsigned datas.

```
>>> from swap.providers.vapor.transaction import FundTransaction
>>> from swap.providers.vapor.solver import FundSolver
>>> from swap.providers.vapor.wallet import Wallet
>>> sender_wallet = Wallet("mainnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> fund_solver = FundSolver(sender_wallet.xprivate_key())
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(sender_wallet.address(),
↳ "vp1qf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37", 10000)
>>> fund_transaction.unsigned_datas(solver=fund_solver)
[{'datas': ['38601bf7ce08dab921916f2c723acca0451d8904649bbec16c2076f1455dd1a2
↳'], 'public_key':
↳ '91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2', 'network
↳ ': 'mainnet', 'path': 'm/44/153/1/0/1'}]
```

sign (**args, **kwargs*)

Bytom sign unsigned transaction datas.

Parameters

- **private_key** (*str*) – Bytom private key, default to None.
- **xprivate_key** (*str*) – Bytom xprivate key, default to None.
- **account** (*int*) – Bytom derivation account, defaults to 1.
- **change** (*bool*) – Bytom derivation change, defaults to False.
- **address** (*int*) – Bytom derivation address, defaults to 1.
- **path** (*str.*) – Bytom derivation path, default to None.
- **indexes** (*list.*) – Bytom derivation indexes, default to None.

Returns Transaction – Bytom transaction instance.

```
>>> from pybytom.transaction import Transaction
>>> transaction = Transaction(network="mainnet")
>>> transaction.build_transaction("bmlq9ndylx02syfwd7npehfxz41ddhzqsve2fu6vc7
↳", inputs=[...], outputs=[...])
>>> transaction.sign(xprivate_key)
<pybytom.transaction.transaction.Transaction object at 0x0409DAF0>
```

signatures () → list

Get Vapor transaction signatures(signed datas).

Returns list – Vapor transaction signatures.

```
>>> from swap.providers.vapor.transaction import FundTransaction
>>> from swap.providers.vapor.solver import FundSolver
>>> from swap.providers.vapor.wallet import Wallet
>>> sender_wallet = Wallet("mainnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> fund_solver = FundSolver(sender_wallet.xprivate_key())
>>> fund_transaction = FundTransaction("mainnet")
>>> fund_transaction.build_transaction(sender_wallet.address(),
↳ "vp1qf78sazxs539nmzqtq7md63fk2x81ew6ed2gu5rnt9um7jerrh07qcyvk37", 10000)
>>> fund_transaction.sign(solver=fund_solver)
>>> fund_transaction.signatures()
[[
↳ '8ca69a01def05118866681bc7008971efcff40895285297e0d6bd791220a36d6ef85a11abc48438de21f0256c
↳ ']]
```

8.3.1 FundTransaction

```
class swap.providers.vapor.transaction.FundTransaction(network: str =
{'blockcenter':
'https://bcapi.bystack.com/vapor/v3',
'blockmeta':
'https://vapor.blockmeta.com/api/v1',
'mov':
'https://ex.movapi.com/vapor/v3',
'vapor-core':
'http://localhost:9889'})
```

Vapor Fund transaction.

Parameters **network** (*str*) – Vapor network, defaults to mainnet.

Returns FundTransaction – Vapor fund transaction instance.

Warning: Do not forget to build transaction after initialize fund transaction.

```
build_transaction(address: str, htlc_address: str, amount: int, asset: str =
'////////////////////////////////', estimate_fee: bool = True)
→ swap.providers.vapor.transaction.FundTransaction
```

Build Vapor fund transaction.

Parameters

- **address** (*str*) – Vapor sender wallet address.
- **htlc_address** (*str*) – Vapor Hash Time Lock Contract (HTLC) address.
- **amount** (*int*) – Vapor amount to fund.
- **asset** (*str*) – Vapor asset id, defaults to BTM asset.
- **estimate_fee** (*bool*) – Estimate Vapor transaction fee, defaults to True.

Returns FundTransaction – Vapor fund transaction instance.

```
>>> from swap.providers.vapor.transaction import FundTransaction
>>> fund_transaction = FundTransaction("mainnet")
```

(continues on next page)

(continued from previous page)

8.3.3 RefundTransaction

class `swap.providers.vapor.transaction.RefundTransaction` (*network: str = 'mainnet'*)
Vapor Refund transaction.

Parameters `network` (*str*) – Vapor network, defaults to mainnet.

Returns `RefundTransaction` – Vapor refund transaction instance.

Warning: Do not forget to build transaction after initialize refund transaction.

build_transaction (*address: str, transaction_id: str, amount: int, asset: str = 'ff', estimate_fee: bool = True*)
→ `swap.providers.vapor.transaction.RefundTransaction`
Build Vapor refund transaction.

Parameters

- **address** (*str*) – Vapor sender wallet address.
- **transaction_id** (*str*) – Vapor fund transaction id to redeem.
- **amount** (*int*) – Vapor amount to withdraw.
- **asset** (*str*) – Vapor asset id, defaults to BTM asset.
- **estimate_fee** (*bool*) – Estimate Vapor transaction fee, defaults to True.

Returns `RefundTransaction` – Vapor refund transaction instance.

```
>>> from swap.providers.vapor.transaction import RefundTransaction
>>> refund_transaction = RefundTransaction("mainnet")
>>> refund_transaction.build_transaction(address=
↳ "vp1q9ndylx02syfwd7npehfzx4lddhzqsve2za23ag", transaction_id=
↳ "481c00212c552fbdf537fcc88c1006a69bdd3130f593965f6ff4f91818a1c6e1",
↳ amount=10000, asset=
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff")
<swap.providers.vapor.transaction.RefundTransaction object at 0x0409DAF0>
```

sign (*solver: swap.providers.vapor.solver.RefundSolver*) → `swap.providers.vapor.transaction.RefundTransaction`
Sign Vapor refund transaction.

Parameters `solver` (`vapor.solver.RefundSolver`) – Vapor refund solver.

Returns `RefundTransaction` – Vapor refund transaction instance.

```
>>> from swap.providers.vapor.transaction import RefundTransaction
>>> from swap.providers.vapor.solver import RefundSolver
>>> from swap.providers.vapor.wallet import Wallet, DEFAULT_PATH
>>> sender_wallet = Wallet("mainnet").from_entropy(
↳ "72fee73846f2d1a5807dc8c953bf79f1").from_path(DEFAULT_PATH)
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03"
↳ ""
>>> refund_solver = RefundSolver(sender_wallet.xprivate_key(),
↳ bytecode=bytecode)
```

(continues on next page)

(continued from previous page)

```
>>> fund_solver = FundSolver(xprivate_key=sender_xprivate_key)
<swap.providers.vapor.solver.FundSolver object at 0x03FCCA60>
```

8.4.2 ClaimSolver

```
class swap.providers.vapor.solver.ClaimSolver(xprivate_key: str, secret_key: str, bytecode: str, account: int = 1, change: bool = False, address: int = 1, path: Optional[str] = None, indexes: Optional[List[str]] = None)
```

Vapor Claim solver.

Parameters

- **xprivate_key** (*str*) – Vapor sender xprivate key.
- **secret_key** (*str*) – Secret password/passphrase.
- **bytecode** (*str*) – Vapor witness HTLC bytecode, defaults to None.
- **account** (*int*) – Vapor derivation account, defaults to 1.
- **change** (*bool*) – Vapor derivation change, defaults to False.
- **address** (*int*) – Vapor derivation address, defaults to 1.
- **path** (*str*) – Vapor derivation path, defaults to None.
- **indexes** (*list*) – Vapor derivation indexes, defaults to None.

Returns ClaimSolver – Vapor claim solver instance.

```
>>> from swap.providers.vapor.solver import ClaimSolver
>>> recipient_xprivate_key =
↪ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebcccc2d33577a9f6
↪ "
>>> bytecode =
↪ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa031d45
↪ "
>>> claim_solver = ClaimSolver(xprivate_key=recipient_xprivate_key, secret_key=
↪ "Hello Meheret!", bytecode=bytecode)
<swap.providers.vapor.solver.ClaimSolver object at 0x03FCCA60>
```

8.4.3 RefundSolver

```
class swap.providers.vapor.solver.RefundSolver(xprivate_key: str, bytecode: str, account: int = 1, change: bool = False, address: int = 1, path: Optional[str] = None, indexes: Optional[List[str]] = None)
```

Vapor Refund solver.

Parameters

- **xprivate_key** (*str*) – Vapor sender xprivate key.
- **bytecode** (*str*) – Vapor witness HTLC bytecode, defaults to None.
- **account** (*int*) – Vapor derivation account, defaults to 1.

- **change** (*bool*) – Vapor derivation change, defaults to False.
- **address** (*int*) – Vapor derivation address, defaults to 1.
- **path** (*str*) – Vapor derivation path, defaults to None.
- **indexes** (*list*) – Vapor derivation indexes, defaults to None.

Returns RefundSolver – Vapor refund solver instance.

```
>>> from swap.providers.vapor.solver import RefundSolver
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f99711367189245
↳ "
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa031d45
↳ "
>>> refund_solver = RefundSolver(xprivate_key=sender_xprivate_key,
↳ bytecode=bytecode)
<swap.providers.vapor.solver.RefundSolver object at 0x03FCCA60>
```

8.5 Signature

Vapor signature.

class swap.providers.vapor.signature.**Signature** (*network: str = 'mainnet'*)

Vapor Signature.

Parameters **network** (*str*) – Vapor network, defaults to mainnet.

Returns Signature – Vapor signature instance.

Note: Vapor has only three networks, mainnet, solonet and testnet.

fee () → int

Get Vapor transaction fee.

Returns int – Vapor transaction fee.

```
>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiA0NDkwMDAsICJhZGRyZXRzIjogInZwMXE5bmR5bHgwMnN5ZndkN25wZWhmeHo0bGRkaHpxc3ZlMnphM
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.fee()
10000000
```

hash () → str

Get Vapor signature transaction hash.

Returns str – Vapor signature transaction hash or transaction id.

```

>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWUiOiA0NDkwMDAsICJhZGRyZXR5IjoqInZwMXEzcGx3dm12eTRxaGptcDV6ZmZ6bW51MGFhZ3BlanQ2ZmxuZ"
↳ ""
>>> recipient_xprivate_key =
↳ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebecc2d33577"
↳ ""
>>> bytecode =
↳ "02e8032091fff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03"
↳ ""
>>> claim_solver = ClaimSolver(recipient_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_claim_transaction_raw, claim_solver)
>>> signature.hash()
"d544ad2d08f9dda33b78953c74eede9c9eb5d80835695310b242d5796cfb91d6"
    
```

`json()` → dict

Get Vapor signature transaction json format.

Returns dict – Vapor signature transaction json format.

```

>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwM0CwgImFkZHZJlmc3MioAiAiYm0xcTluZHlseDAyYzc3bmBlaGZ4ejRsZGRoenFzdmUyZ"
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718"
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.json()
{"tx_id": "50b336ab6e055d9d4d65a9f2295b53270abd3816c23ba4c954841f399aa772d5",
↳ "version": 1, "size": 405, "time_range": 0, "inputs": [{"type": "spend",
↳ "asset_id":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "asset_
↳ definition": {}, "amount": 8160000, "control_program":
↳ "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", "address":
↳ "bm1q9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7", "spent_output_id":
↳ "88289fa4c7633574931be7ce4102aeb24def0de20e38e7d69a5ddd6efc116b95", "input_
↳ id": "49e97e1685d5b08b82713e6acb6747bd176177141cb5618aeecca418c3afd03a",
↳ "witness_arguments": [
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2"], "sign_
↳ data": {"f7d3aa18b295cda6f2b1132c4231933cc92f3baca705974c5de378f9b695f0e2"},
↳ {"type": "spend", "asset_id":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "asset_
↳ definition": {}, "amount": 167639800, "control_program":
↳ "00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", "address":
↳ "bm1q9ndylx02syfwd7npehfxz4lddhzqsve2fu6vc7", "spent_output_id":
↳ "d0cc73f664fdda20d6a9bb6f4c0204f30e738959b02f3b645ad17d190fafd5b3", "input_
↳ id": "d8729c2683f56cb50ee65c12484edfb4ea8182f71b11de84daf5cc05ccde47b",
↳ "witness_arguments": [
↳ "91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2"], "sign_
↳ data": {"ca615ba2c729e463fbf79a11419176261b1bf6be44813335d2b256e8a7bbceee"}],
↳ "outputs": [{"type": "control", "id":
↳ "9c8c0b8ceaba9bea5ffe12fc51ac5ef82f1da6bebe537ab7d621845d11829"
↳ "position": 0, "asset_id":
↳ "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "asset_
↳ definition": {}, "amount": 10000, "control_program":
↳ "00204f8f0e88d0a44b3d884b07b6dd4536518ffcb596a91ca0e6b2f37e96463bbfc",
↳ "address": "bm1qf78sazxs539nmzqtq7md63fk2x81ew6ed2gu5rnt9um7jerrh07q3yf5q8"}
↳ [{"type": "control", "id":
↳ "71e5659415702913290219e56b1459142030107691011407b11066"
    
```

(continued from previous page)

raw() → str

Get Vapor signature transaction raw.

Returns str – Vapor signature transaction raw.

```

>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZlhlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.raw()

↳ "07010002015f015d82e65f964d3c3532548dfde938462f566c95d3c90e6a3a182a0b3bdae46aa790fffffffff
↳ "

```

type() → str

Get Vapor signature transaction type.

Returns str – Vapor signature transaction type.

```

>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import RefundSolver
>>> unsigned_refund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZlhlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳ "
>>> refund_solver = RefundSolver(sender_xprivate_key, bytecode, 1000)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_refund_transaction_raw, refund_solver)
>>> signature.type()
"vapor_refund_signed"

```

sign(*transaction_raw*: str, *solver*: Union[swap.providers.vapor.solver.FundSolver, swap.providers.vapor.solver.ClaimSolver, swap.providers.vapor.solver.RefundSolver]) → Union[swap.providers.vapor.signature.FundSignature, swap.providers.vapor.signature.ClaimSignature, swap.providers.vapor.signature.RefundSignature]

Sign unsigned transaction raw.

Parameters

- **transaction_raw** (str) – Vapor unsigned transaction raw.
- **solver** (vapor.solver.FundSolver, vapor.solver.ClaimSolver, vapor.solver.RefundSolver) – Vapor solver

Returns FundSignature, ClaimSignature, RefundSignature – Vapor signature instance.


```
>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWU...ZGRoenFzdmUyZ..."
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718..."
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(transaction_raw=unsigned_fund_transaction_raw, solver=fund_
↳ solver)
<swap.providers.vapor.signature.FundSignature object at 0x0409DAF0>
```

unsigned_datas (*args, **kwargs) → list
 Get Vapor transaction unsigned datas with instruction.

Returns list – Vapor transaction unsigned datas.

```
>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWU...YWFncHVqdZm..."
↳ ""
>>> recipient_xprivate_key =
↳ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebecc2d33577..."
↳ ""
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03..."
↳ ""
>>> claim_solver = ClaimSolver(recipient_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_claim_transaction_raw, claim_solver)
>>> signature.unsigned_datas()
[{"datas": [{"5172290a9858a4a07c603c741f6fd8e86715a8a4470eb237d0a2d8325c1706b7
↳ }, {"network": "mainnet", "path": null}], {"datas": [
↳ "e41ab964701f20a23473340b11d5cbcfba9a373cedf284f809c0c61ce7d715da"],
↳ "public_key":
↳ "3e0a377ae4afa031d4551599d9bb7d5b27f4736d77f78cac4d476f0ffba5ae3e", "network
↳ ": "mainnet", "path": "m/44/153/1/0/1"}]}
```

signatures () → list
 Get Vapor transaction signatures(signed datas).

Returns list – Vapor transaction signatures.

```
>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWU...ZGRoenFzdmUyZ..."
↳ ""
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718..."
↳ ""
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
```

(continues on next page)

(continued from previous page)

```

>>> signature.signatures()
[[
↳ "00c005bc114ec5f89b49e48526f90312b6f1a5274efd252049880023aeb8e7998c15e0baa4ff10fabbdade702f
↳ "], [
↳ "fbfb123ef062c9068dad22ce28de2a4e72f82076b6f98cb7e0909c11856260e7020aecbdca639f0b6e39d345
↳ "]]

```

transaction_raw() → str

Get Vapor signed transaction raw.

Returns str – Vapor signed transaction raw.

```

>>> from swap.providers.vapor.signature import Signature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)
>>> signature = Signature("mainnet")
>>> signature.sign(unsigned_fund_transaction_raw, fund_solver)
>>> signature.transaction_raw()

↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "

```

8.5.1 FundSignature

class swap.providers.vapor.signature.**FundSignature** (*network: str = 'mainnet'*)

Vapor Fund signature.

Parameters **network** (*str*) – Vapor network, defaults to mainnet.**Returns** FundSignature – Vapor fund signature instance.**sign** (*transaction_raw: str, solver: swap.providers.vapor.solver.FundSolver*) →*swap.providers.vapor.signature.FundSignature*

Sign unsigned fund transaction raw.

Parameters

- **transaction_raw** (*str*) – Vapor unsigned fund transaction raw.
- **solver** (*vapor.solver.FundSolver*) – Vapor fund solver.

Returns FundSignature – Vapor fund signature instance.

```

>>> from swap.providers.vapor.signature import FundSignature
>>> from swap.providers.vapor.solver import FundSolver
>>> unsigned_fund_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcTluZHlseDAyc3lmd2Q3bnBlaGZ4ejRsZGRoenFzdmUyZ
↳ "
>>> sender_xprivate_key =
↳ "205b15f70e253399da90b127b074ea02904594be9d54678207872ec1ba31ee51ef4490504bd2b6f9971136718
↳ "
>>> fund_solver = FundSolver(sender_xprivate_key)

```

(continues on next page)

(continued from previous page)

```
>>> fund_signature = FundSignature("mainnet")
>>> fund_signature.sign(unsigned_fund_transaction_raw, fund_solver)
<swap.providers.vapor.signature.FundSignature object at 0x0409DAF0>
```

8.5.2 ClaimSignature

class swap.providers.vapor.signature.**ClaimSignature** (*network: str = 'mainnet'*)
Vapor Claim signature.

Parameters **network** (*str*) – Vapor network, defaults to mainnet.

Returns ClaimSignature – Vapor claim signature instance.

sign (*transaction_raw: str, solver: swap.providers.vapor.solver.ClaimSolver*) →
swap.providers.vapor.signature.ClaimSignature
Sign unsigned claim transaction raw.

Parameters

- **transaction_raw** (*str*) – Vapor unsigned claim transaction raw.
- **solver** (*vapor.solver.ClaimSolver*) – Vapor claim solver.

Returns ClaimSignature – Vapor claim signature instance.

```
>>> from swap.providers.vapor.signature import ClaimSignature
>>> from swap.providers.vapor.solver import ClaimSolver
>>> unsigned_claim_transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHZJc3MiOiAiYm0xcTNwbHd2bXZ5NHFoamlwNXpmZnptazUwYWFnchVqdDZmN
↳ "
>>> recipient_xprivate_key =
↳ "58dd4094155bbebf2868189231c47e4e0edbd9f74545f843c9537259e1d7a656983aef283d0ccebecc2d33577
↳ "
>>> bytecode =
↳ "02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa03
↳ "
>>> claim_solver = ClaimSolver(recipient_xprivate_key, "Hello Meheret!",
↳ bytecode)
>>> claim_signature = ClaimSignature("mainnet")
>>> claim_signature.sign(transaction_raw=unsigned_claim_transaction_raw,
↳ solver=claim_solver)
<swap.providers.vapor.signature.ClaimSignature object at 0x0409DAF0>
```

8.5.3 RefundSignature

class swap.providers.vapor.signature.**RefundSignature** (*network: str = 'mainnet'*)
Vapor Refund signature.

Parameters **network** (*str*) – Vapor network, defaults to mainnet.

Returns RefundSignature – Vapor claim signature instance.

sign (*transaction_raw: str, solver: swap.providers.vapor.solver.RefundSolver*) →
swap.providers.vapor.signature.RefundSignature
Sign unsigned refund transaction raw.

Parameters


```
swap.providers.vapor.rpc.get_utxos (program: str, asset: str =
    '%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%', network:
    str = 'mainnet', limit: int = 15, by: str = 'amount', order:
    str = 'desc', headers: dict = {'accept': 'application/json',
    'content-type': 'application/json; charset=utf-8', 'user-
    agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60) →
    list
```

Get Vapor unspent transaction outputs (UTXO's).

Parameters

- **program** (*str*) – Vapor control program.
- **asset** (*str*) – Vapor asset id, defaults to BTM asset.
- **network** (*str*) – Vapor network, defaults to mainnet.
- **limit** (*int*) – Vapor utxo's limit, defaults to 15.
- **by** (*str*) – Sort by, defaults to amount.
- **order** (*str*) – Sort order, defaults to desc.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns list – Vapor unspent transaction outputs (UTXO's).

```
>>> from swap.providers.vapor.rpc import get_utxos
>>> from swap.providers.vapor.assets import BTM as ASSET
>>> get_utxos (program="00142cda4f99ea8112e6fa61cdd26157ed6dc408332a", asset=ASSET,
↳ network="mainnet")
[{'hash': 'e152f88d33c6659ad823d15c5c65b2ed946d207c42430022cba9bb9b9d70a7a4',
↳ 'asset': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 587639800}, {'hash':
↳ '88289fa4c7633574931be7ce4102aeb24def0de20e38e7d69a5ddd6efc116b95', 'asset':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount':
↳ 8160000}, {'hash':
↳ 'f71c68f921b434cc2bcd469d26e7927aa6db7500e4cdeef814884f11c10f5de2', 'asset':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount':
↳ 10000}, {'hash':
↳ 'e46cfeccl1f1a26413172ce81c78affb19408e613915642fa5fb04d3b0a4ffa65', 'asset':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount':
↳ 100}]
```

```
swap.providers.vapor.rpc.estimate_transaction_fee (address: str, amount:
    int, asset: str =
    '%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%',
    confirmations: int = 1, network:
    str = 'mainnet', headers: dict
    = {'accept': 'application/json',
    'content-type': 'application/json;
    charset=utf-8', 'user-agent': 'Swap
    User-Agent 0.3.0'}, timeout: int =
    60) → int
```

Estimate Vapor transaction fee.

Parameters

- **address** (*str*) – Vapor address.
- **amount** (*int*) – Vapor amount (NEU amount).

- **asset** (*str*) – Vapor asset id, default to BTM asset.
- **confirmations** (*int*) – Vapor confirmations, default to 1.
- **network** (*str*) – Vapor network, defaults to solonet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – request timeout, default to 60.

Returns *str* – Estimated transaction fee (NEU amount).

```
>>> from swap.providers.vapor.rpc import estimate_transaction_fee
>>> from swap.providers.vapor.assets import BTM as ASSET
>>> estimate_transaction_fee(address="vplq9ndylx02syfwd7npehfxz41ddhzqsve2za23ag",
↳ asset=ASSET, amount=100_000, confirmations=100, network="mainnet")
449000
```

`swap.providers.vapor.rpc.build_transaction` (*address: str, transaction: dict, network: str = 'mainnet, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60*) → *dict*

Build Vapor transaction.

Parameters

- **address** (*str*) – Vapor address.
- **transaction** (*dict*) – Vapor transaction (inputs, outputs, fee, confirmations & forbid_chain_tx).
- **network** (*str*) – Vapor network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns *dict* – Vapor built transaction.

```
>>> from swap.providers.vapor.rpc import build_transaction
>>> build_transaction(address="vplq9ndylx02syfwd7npehfxz41ddhzqsve2za23ag",
↳ transaction={'fee': "0.1", "confirmations": 1, "inputs": [{"type": "spend_wallet", "amount": "0.1", "asset": "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff"}, {"type": "control_address", "amount": "0.1", "asset": "ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff", "address": "vplqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37"}]}, network="mainnet")
{'tx': {'hash': 'f6b35e2f37862bc9a2cfbc9f21440102599fc5860ed73ba5c3f44e17408e2c8c', 'status': True, 'size': 279, 'submission_timestamp': 0, 'memo': '', 'inputs': [{'script': '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address': 'vplq9ndylx02syfwd7npehfxz41ddhzqsve2za23ag', 'asset': {'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals': 0, 'symbol': 'BTM'}, 'amount': '0.9', 'type': 'spend'}], 'outputs': [{'utxo_id': '793540933493c531efdc0dfd89d95041badc4e1efaf938d9916cdc7834984c74', 'script': '00204f8f0e88d0a44b3d884b07b6dd4536518ffccb596a91ca0e6b2f37e96463bbfc', 'address': 'vplqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37', 'asset': {'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals': 0, 'symbol': 'BTM'}, 'amount': '0.1', 'type': 'control'}], 'fee': '62c391358a7bccac6a3alb9efd5339eb7207660372290ceb8718af2284467ba0', 'script': '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address': 'vplq9ndylx02syfwd7npehfxz41ddhzqsve2za23ag', 'asset': {'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals': 0, 'symbol': 'BTM'}, 'amount': '0.7', 'type': 'control'}], 'balances': [{'asset': {'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'decimals': 0, 'symbol': 'BTM'}, 'amount': '-0.1'}], 'types': ['ordinary'], 'min_veto_height': 0}, 'raw_transaction':
```

(continues on next page)

(continued from previous page)

```
swap.providers.vapor.rpc.get_transaction(transaction_id: str, network: str = 'mainnet',
                                         headers: dict = {'accept': 'application/json',
                                                           'content-type': 'application/json; charset=utf-8',
                                                           'user-agent': 'Swap User-Agent 0.3.0'}, timeout:
                                         int = 60) → dict
```

Get Vapor transaction detail.

Parameters

- **transaction_id** (*str*) – Vapor transaction id.
- **network** (*str*) – Vapor network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Vapor transaction detail.

```
>>> from swap.providers.vapor.rpc import get_transaction
>>> get_transaction(transaction_id=
↳ "4e91bca76db112d3a356c17366df93e364a4922993414225f65390220730d0c1", network=
↳ "mainnet")
{'tx_id': '961d984b04214dc202fb40f4c48466d10a2813a138a31e1d2877ad3b6af0ef4c',
↳ 'timestamp': 1606993457000, 'block_hash':
↳ '440e791390f61c615b974c9292ac1d43bad67368076ef6d86a77cab22f1c2119', 'block_
↳ height': 85098064, 'trx_amount': 0, 'trx_fee': 10000000, 'status_fail': False,
↳ 'is_vote': False, 'is_cross_chain': False, 'coinbase': 0, 'size': 646, 'chain_
↳ status': 'mainnet', 'index_id': 18811685, 'mux_id':
↳ '97fdbel17d62ae8f8f2024ebc6a231183e8ce7c4e8fde5645b9a3c973f8d0d3ad', 'inputs': [{
↳ 'type': 'spend', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount': 1
↳ 0000, 'control_program':
↳ '00204f8f0e88d0a44b3d884b07b6dd4536518ffcbb596a91ca0e6b2f37e96463bbfc', 'address
↳ ': 'vp1qf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37', 'spent_
↳ output_id': 'c30e26caef4ad3436542700c5b32a91cdf0622c60a6c8a6e11cb1c0b250bc65f',
↳ 'input_id': 'c470139ab9f9e81829e51096c57365392195ea2e90d7fb19e9eb2b309df22425',
↳ 'witness_arguments': [
↳ 'db718488496e0823b1cfd9ce64f226ffc4e9debd30eac0b751aa6bd28f694908ae0c0f5d39dd6ed697cae9b085783
↳ ', '01',
↳ '02e8032091ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2203e0a377ae4afa031d45
↳ '], 'decode_program': ['DUP ', 'SHA3 ', 'DATA_32_
↳ 4f8f0e88d0a44b3d884b07b6dd4536518ffcbb596a91ca0e6b2f37e96463bbfc', 'EQUALVERIFY
↳ ', 'DATA_8 ffffffffffffffffff', 'SWAP ', 'FALSE ', 'CHECKPREDICATE '], 'decimals
↳ ': 8, 'symbol': 'BTM'}, {'type': 'spend', 'asset_id':
↳ 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'amount': 1
↳ 6990000, 'control_program': '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a',
↳ 'address': 'vp1q9ndylx02syfwd7npehfz41ddhzqsve2za23ag', 'spent_output_id':
↳ '1a7f2357f2ec272ea2d96413aee511d2077447731a799110cef97de177739181', 'input_id':
↳ '4f50c438b5006eafc547cc48128cb94d2e39430ef30f117aa85e6f30ac92ce09', 'witness_
↳ arguments': [
↳ 'e31abbf90f8b20cb41f4daedc2f558dedcbc258cfb9a36ae1f8c0b4b80f448a78d1d835adb02cc918374c71df8c0
↳ ', '91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2'], 'decode_
↳ program': ['DUP ', 'HASH160 ', 'DATA_20 2cda4f99ea8112e6fa61cdd26157ed6dc408332a
↳ ', 'EQUALVERIFY ', 'TXSIGHASH ', 'SWAP ', 'CHECKSIG '], 'decimals': 8, 'symbol
↳ ': 'BTM'}], 'outputs': [{'type': 'control', 'id':
↳ '20c00b6f9f4fc4f22ccee6c5f8b471a72b1f514f821b1c9c3d1f3243ff011cf1', 'position': 1
↳ 0, 'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'amount': 10000, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'decimals': 8, 'decode_program': 'DUP ', 'HASH160 ', 'DATA_20 2cda4f99ea8112e6fa61cdd26157ed6dc408332a',
↳ 'EQUALVERIFY ', 'TXSIGHASH ', 'SWAP ', 'CHECKSIG '], 'symbol': 'BTM'}, {'type':
↳ 'control', 'id':
↳ 'f7a36ebce7001e83510eb16c13ff0e5ef311179c25e8cf7bcb599ff8d17e23b2', 'position':
↳ 115
```

(continues on next page)

8.6. Remote Procedure Call (RPC)

```
swap.providers.vapor.rpc.decode_raw(raw: str, network: str = 'mainnet', headers: dict
    = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent
    0.3.0'}, timeout: int = 60) → dict
```

Decode original Vapor raw.

Parameters

- **raw** (*str*) – Vapor transaction raw.
- **network** (*str*) – Vapor network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns dict – Vapor decoded transaction raw.

```
>>> from swap.providers.vapor.rpc import decode_raw
>>> decode_raw(raw=
↳ "07010001015f015d0c8382b6aadd32748d0a9490259bf9ba5b55f6ac283535f8752cf5d51621801cfffffffffffff
↳ ", network="testnet")
{'tx_id': 'f6b35e2f37862bc9a2cfbc9f21440102599fc5860ed73ba5c3f44e17408e2c8c',
↳ 'version': 1, 'size': 279, 'time_range': 0, 'inputs': [{'type': 'spend', 'asset_
↳ id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff', 'asset_
↳ definition': {}, 'amount': 90000000, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'vplq9ndylx02syfwd7npehfxz4lddhqsve2za23ag', 'spent_output_id':
↳ 'f337ffe5333849636e7f6ca01b8a3aa0ef8cc50fadf875730cd40786bb504f80', 'input_id':
↳ '437cebc2dbdff6f5c821fbf6895455192685411bca64f796ff389554e0c23f44', 'witness_
↳ arguments': ['91ff7f525ff40874c4f47f0cab42e46e3bf53adad59adef9558ad1b6448f22e2
↳ ']}, {'type': 'control', 'id':
↳ '793540933493c531efdc0dfd89d95041badc4e1efaf938d9916cdc7834984c74', 'position': 0,
↳ 'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'asset_definition': {}, 'amount': 10000000, 'control_program':
↳ '00204f8f0e88d0a44b3d884b07b6dd4536518ffcb596a91ca0e6b2f37e96463bbfc', 'address
↳ ': 'vplqf78sazxs539nmzqtq7md63fk2x8lew6ed2gu5rnt9um7jerrh07qcyvk37'}, {'type':
↳ 'control', 'id':
↳ '62c391358a7bccac6a3a1b9efd5339eb7207660372290ceb8718af2284467ba0', 'position': 1,
↳ 'asset_id': 'ffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff',
↳ 'asset_definition': {}, 'amount': 70000000, 'control_program':
↳ '00142cda4f99ea8112e6fa61cdd26157ed6dc408332a', 'address':
↳ 'vplq9ndylx02syfwd7npehfxz4lddhqsve2za23ag'}], 'fee': 10000000}
```

```
swap.providers.vapor.rpc.submit_raw(address: str, raw: str, signatures: list, network: str =
    'mainnet', headers: dict = {'accept': 'application/json',
    'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent
    0.3.0'}, timeout: int = 60) →
    str
```

Submit original Vapor raw into blockchain.

Parameters

- **address** (*str*) – Vapor address.
- **raw** (*str*) – Vapor transaction raw.
- **signatures** (*list*) – Vapor signed message datas.

- **network** (*str*) – Vapor network, defaults to mainnet.
- **headers** (*dict*) – Request headers, default to common headers.
- **timeout** (*int*) – Request timeout, default to 60.

Returns *str* – Vapor submitted transaction id/hash.

```
>>> from swap.providers.vapor.rpc import submit_raw
>>> submit_raw(address="vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag", raw=
↳ "07010001015f015d0c8382b6aadd32748d0a9490259bf9ba5b55f6ac283535f8752cf5d51621801cffffff",
↳ ", signatures=[[
↳ "31818788bd6cfd255643242212efc1239db8f9dcd91b0e07ef1ddd38d8edf98c420da5578ec195ff7a5ddd72605a1
↳ "]], network="mainnet")
"2993414225f65390220730d0c1a356c14e91bca76db112d37366df93e364a492"
```

8.7 Utils

Vapor Utils.

`swap.providers.vapor.utils.amount_converter` (*amount: Union[int, float]*, *symbol: str = 'NEU2BTM'*) → Union[int, float]

Vapor amount converter.

Parameters

- **amount** (*int*, *float*) – Vapor amount.
- **symbol** (*str*) – Vapor symbol, default to NEU2BTM.

Returns *int*, *float* – BTM asset amount.

```
>>> from swap.providers.vapor.utils import amount_converter
>>> amount_converter(amount=10_000_000, symbol="NEU2BTM")
0.1
```

`swap.providers.vapor.utils.is_network` (*network: str*) → bool

Check Vapor network.

Parameters **network** (*str*) – Vapor network.

Returns bool – Vapor valid/invalid network.

```
>>> from swap.providers.vapor.utils import is_network
>>> is_network(network="solonet")
True
```

`swap.providers.vapor.utils.is_address` (*address: str*, *network: Optional[str] = None*) → bool

Check Vapor address.

Parameters

- **address** (*str*) – Vapor address.
- **network** (*str*) – Vapor network, defaults to None.

Returns bool – Vapor valid/invalid address.

```

>>> from swap.providers.vapor.utils import is_address
>>> is_address(address="vplq9ndylx02syfwd7npehfxz4lddhzqsve2za23ag", network=
↳ "mainnet")
True

```

`swap.providers.vapor.utils.is_transaction_raw`(*transaction_raw: str*) → bool
 Check Vapor transaction raw.

Parameters `transaction_raw` (*str*) – Vapor transaction raw.

Returns bool – Vapor valid/invalid transaction raw.

```

>>> from swap.providers.vapor.utils import is_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG5ldTBwenAyNGRrZmZlbHlzOHpjb2"
↳ ""
>>> is_transaction_raw(transaction_raw=transaction_raw)
True

```

`swap.providers.vapor.utils.decode_transaction_raw`(*transaction_raw: str, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60*) → dict

Decode Vapor transaction raw.

Parameters

- `transaction_raw` (*str*) – Vapor transaction raw.
- `headers` (*dict*) – Request headers, default to common headers.
- `timeout` (*int*) – Request timeout, default to 60.

Returns dict – Decoded Vapor transaction raw.

```

>>> from swap.providers.vapor.utils import decode_transaction_raw
>>> transaction_raw =
↳ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG5ldTBwenAyNGRrZmZlbHlzOHpjb2"
↳ ""
>>> decode_transaction_raw(transaction_raw=transaction_raw)
{'fee': ..., 'type': '...', 'address': '...', 'transaction': {...}, 'unsigned_
↳ datas': [...], 'signatures': [...], 'network': '...'}

```

`swap.providers.vapor.utils.submit_transaction_raw`(*transaction_raw: str, headers: dict = {'accept': 'application/json', 'content-type': 'application/json; charset=utf-8', 'user-agent': 'Swap User-Agent 0.3.0'}, timeout: int = 60*) → dict

Submit Vapor transaction raw.

Parameters

- `transaction_raw` (*str*) – Vapor transaction raw.
- `headers` (*dict*) – Request headers, default to common headers.
- `timeout` (*int*) – Request timeout, default to 60.

Returns dict – Vapor submitted transaction id, fee, type and date.

```

>>> from swap.providers.vapor.utils import submit_transaction_raw
>>> transaction_raw =
↪ "eyJmZWUiOiAxMDAwMDAwMCwgImFkZHJlc3MiOiAiYm0xcWU5MHFqdDl3NG04cnQzdG51dTBenAyNGRrZmZlbHlzOHpjd"
↪ ""
>>> submit_transaction_raw(transaction_raw=transaction_raw)
{'fee': ..., 'type': '...', 'transaction_id': '...', 'network': '...', 'date': '..
↪ .' }

```

`swap.providers.vapor.utils.get_address_type` (*address: str*) → Optional[str]

Get Vapor address type.

Parameters `address` (*str*) – Vapor address.

Returns str – Vapor address type (P2WPKH, P2WSH).

```

>>> from swap.providers.vapor.utils import get_address_type
>>> get_address_type(address="vp1q9ndylx02syfwd7npehfxz4lddhzqsve2za23ag")
"p2wpkh"

```


PYTHON MODULE INDEX

S

- swap.providers.bitcoin.htlc, 31
- swap.providers.bitcoin.rpc, 46
- swap.providers.bitcoin.signature, 41
- swap.providers.bitcoin.solver, 39
- swap.providers.bitcoin.transaction, 33
- swap.providers.bitcoin.utils, 49
- swap.providers.bitcoin.wallet, 23
- swap.providers.bytom.htlc, 60
- swap.providers.bytom.rpc, 78
- swap.providers.bytom.signature, 72
- swap.providers.bytom.solver, 70
- swap.providers.bytom.transaction, 63
- swap.providers.bytom.utils, 83
- swap.providers.bytom.wallet, 53
- swap.providers.vapor.htlc, 94
- swap.providers.vapor.rpc, 112
- swap.providers.vapor.signature, 106
- swap.providers.vapor.solver, 104
- swap.providers.vapor.transaction, 97
- swap.providers.vapor.utils, 117
- swap.providers.vapor.wallet, 87
- swap.utils, 21

Symbols

```

--account <account>
  swap-bitcoin-sign command line
    option, 12
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 19
--address <address>
  swap-bitcoin-claim command line
    option, 10
  swap-bitcoin-fund command line
    option, 11
  swap-bitcoin-refund command line
    option, 12
  swap-bitcoin-sign command line
    option, 13
  swap-bytom-claim command line
    option, 13
  swap-bytom-fund command line
    option, 14
  swap-bytom-refund command line
    option, 15
  swap-bytom-sign command line
    option, 16
  swap-vapor-claim command line
    option, 17
  swap-vapor-fund command line
    option, 18
  swap-vapor-refund command line
    option, 19
  swap-vapor-sign command line
    option, 19
--amount <amount>
  swap-bitcoin-claim command line
    option, 10
  swap-bitcoin-fund command line
    option, 11
  swap-bitcoin-refund command line
    option, 12
  swap-bytom-claim command line
    option, 13
  swap-bytom-fund command line
    option, 14
  swap-bytom-refund command line
    option, 15
  swap-bytom-sign command line
    option, 16
  swap-vapor-claim command line
    option, 17
  swap-vapor-fund command line
    option, 18
  swap-vapor-refund command line
    option, 19
  swap-vapor-sign command line
    option, 19
--asset <asset>
  swap-bitcoin-claim command line
    option, 10
  swap-bitcoin-fund command line
    option, 11
  swap-bitcoin-refund command line
    option, 12
  swap-bitcoin-sign command line
    option, 13
  swap-bytom-claim command line
    option, 13
  swap-bytom-fund command line
    option, 14
  swap-bytom-refund command line
    option, 15
  swap-vapor-claim command line
    option, 17
  swap-vapor-fund command line
    option, 18
  swap-vapor-refund command line
    option, 19
--bytecode <bytecode>
  swap-bitcoin-sign command line
    option, 12
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 19
--change <change>
  swap-bitcoin-sign command line
    option, 12
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 19
--htlc-address <htlc_address>
  swap-bitcoin-fund command line
    option, 11
  swap-bytom-fund command line
    option, 14

```

```
swap-vapor-fund command line
  option, 18
--indent <indent>
  swap-bitcoin-decode command line
    option, 10
  swap-bytom-decode command line
    option, 14
  swap-vapor-decode command line
    option, 17
--indexes <indexes>
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 20
--network <network>
  swap-bitcoin-claim command line
    option, 10
  swap-bitcoin-fund command line
    option, 11
  swap-bitcoin-htlc command line
    option, 11
  swap-bitcoin-refund command line
    option, 12
  swap-bytom-claim command line
    option, 14
  swap-bytom-fund command line
    option, 14
  swap-bytom-htlc command line
    option, 15
  swap-bytom-refund command line
    option, 15
  swap-vapor-claim command line
    option, 17
  swap-vapor-fund command line
    option, 18
  swap-vapor-htlc command line
    option, 18
  swap-vapor-refund command line
    option, 19
--offline <offline>
  swap-bitcoin-decode command line
    option, 10
--path <path>
  swap-bitcoin-sign command line
    option, 13
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 20
--recipient-address
  <recipient_address>
  swap-bitcoin-htlc command line
    option, 11
--recipient-public-key
  <recipient_public_key>
  swap-bytom-htlc command line
    option, 15
  swap-vapor-htlc command line
    option, 18
--root-xprivate-key
  <root_xprivate_key>
  swap-bitcoin-sign command line
    option, 12
--secret-hash <secret_hash>
  swap-bitcoin-htlc command line
    option, 11
  swap-bytom-htlc command line
    option, 15
  swap-vapor-htlc command line
    option, 18
--secret-key <secret_key>
  swap-bitcoin-sign command line
    option, 12
  swap-bytom-sign command line
    option, 16
  swap-vapor-sign command line
    option, 19
--sender-address <sender_address>
  swap-bitcoin-htlc command line
    option, 11
--sender-public-key
  <sender_public_key>
  swap-bytom-htlc command line
    option, 15
  swap-vapor-htlc command line
    option, 18
--sequence <sequence>
  swap-bitcoin-htlc command line
    option, 11
  swap-bitcoin-sign command line
    option, 12
  swap-bytom-htlc command line
    option, 15
  swap-vapor-htlc command line
    option, 18
--transaction-id <transaction_id>
  swap-bitcoin-claim command line
    option, 10
  swap-bitcoin-refund command line
    option, 12
  swap-bytom-claim command line
    option, 13
  swap-bytom-refund command line
    option, 15
  swap-vapor-claim command line
    option, 17
  swap-vapor-refund command line
    option, 19
```

```

--transaction-raw <transaction_raw>
  swap-bitcoin-decode command line
    option,10
  swap-bitcoin-sign command line
    option,12
  swap-bitcoin-submit command line
    option,13
  swap-bytom-decode command line
    option,14
  swap-bytom-sign command line
    option,16
  swap-bytom-submit command line
    option,16
  swap-vapor-decode command line
    option,17
  swap-vapor-sign command line
    option,19
  swap-vapor-submit command line
    option,20
--version
  swap command line option,9
--version <version>
  swap-bitcoin-claim command line
    option,10
  swap-bitcoin-fund command line
    option,11
  swap-bitcoin-refund command line
    option,12
  swap-bitcoin-sign command line
    option,13
--xprivate-key <xprivate_key>
  swap-bytom-sign command line
    option,16
  swap-vapor-sign command line
    option,19
-a
  swap-bitcoin-claim command line
    option,10
  swap-bitcoin-fund command line
    option,11
  swap-bitcoin-refund command line
    option,12
  swap-bytom-claim command line
    option,13
  swap-bytom-fund command line
    option,14
  swap-bytom-refund command line
    option,15
  swap-vapor-claim command line
    option,17
  swap-vapor-fund command line
    option,18
  swap-vapor-refund command line
    option,19
-ac
  swap-bitcoin-sign command line
    option,12
  swap-bytom-sign command line
    option,16
  swap-vapor-sign command line
    option,19
-ad
  swap-bitcoin-sign command line
    option,13
  swap-bytom-sign command line
    option,16
  swap-vapor-sign command line
    option,19
-am
  swap-bitcoin-claim command line
    option,10
  swap-bitcoin-fund command line
    option,11
  swap-bitcoin-refund command line
    option,12
  swap-bytom-claim command line
    option,13
  swap-bytom-fund command line
    option,14
  swap-bytom-refund command line
    option,15
  swap-vapor-claim command line
    option,17
  swap-vapor-fund command line
    option,18
  swap-vapor-refund command line
    option,19
-as
  swap-bytom-claim command line
    option,13
  swap-bytom-fund command line
    option,14
  swap-bytom-refund command line
    option,15
  swap-vapor-claim command line
    option,17
  swap-vapor-fund command line
    option,18
  swap-vapor-refund command line
    option,19
-b
  swap-bitcoin-sign command line
    option,12
  swap-bytom-sign command line
    option,16
  swap-vapor-sign command line
    option,19
-ch

```

swap-bitcoin-sign command line
option, 12

swap-bytom-sign command line
option, 16

swap-vapor-sign command line
option, 19

-ha

swap-bitcoin-fund command line
option, 11

swap-bytom-fund command line
option, 14

swap-vapor-fund command line
option, 18

-i

swap-bitcoin-decode command line
option, 10

swap-bytom-decode command line
option, 14

swap-bytom-sign command line
option, 16

swap-vapor-decode command line
option, 17

swap-vapor-sign command line
option, 20

-n

swap-bitcoin-claim command line
option, 10

swap-bitcoin-fund command line
option, 11

swap-bitcoin-htlc command line
option, 11

swap-bitcoin-refund command line
option, 12

swap-bytom-claim command line
option, 14

swap-bytom-fund command line
option, 14

swap-bytom-htlc command line
option, 15

swap-bytom-refund command line
option, 15

swap-vapor-claim command line
option, 17

swap-vapor-fund command line
option, 18

swap-vapor-htlc command line
option, 18

swap-vapor-refund command line
option, 19

-o

swap-bitcoin-decode command line
option, 10

-p

swap-bitcoin-sign command line
option, 13

swap-bytom-sign command line
option, 16

swap-vapor-sign command line
option, 20

-ra

swap-bitcoin-htlc command line
option, 11

-rpk

swap-bytom-htlc command line
option, 15

swap-vapor-htlc command line
option, 18

-rxk

swap-bitcoin-sign command line
option, 12

-s

swap-bitcoin-htlc command line
option, 11

swap-bitcoin-sign command line
option, 12

swap-bytom-htlc command line
option, 15

swap-vapor-htlc command line
option, 18

-sa

swap-bitcoin-htlc command line
option, 11

-sh

swap-bitcoin-htlc command line
option, 11

swap-bytom-htlc command line
option, 15

swap-vapor-htlc command line
option, 18

-sk

swap-bitcoin-sign command line
option, 12

swap-bytom-sign command line
option, 16

swap-vapor-sign command line
option, 19

-spk

swap-bytom-htlc command line
option, 15

swap-vapor-htlc command line
option, 18

-ti

swap-bitcoin-claim command line
option, 10

swap-bitcoin-refund command line
option, 12

swap-bytom-claim command line
option, 13

swap-bytom-refund command line option, 15
 swap-vapor-claim command line option, 17
 swap-vapor-refund command line option, 19
 -tr
 swap-bitcoin-decode command line option, 10
 swap-bitcoin-sign command line option, 12
 swap-bitcoin-submit command line option, 13
 swap-bytom-decode command line option, 14
 swap-bytom-sign command line option, 16
 swap-bytom-submit command line option, 16
 swap-vapor-decode command line option, 17
 swap-vapor-sign command line option, 19
 swap-vapor-submit command line option, 20
 -v
 swap command line option, 9
 swap-bitcoin-claim command line option, 10
 swap-bitcoin-fund command line option, 11
 swap-bitcoin-refund command line option, 12
 swap-bitcoin-sign command line option, 13
 -xk
 swap-bytom-sign command line option, 16
 swap-vapor-sign command line option, 19

A

address() (*swap.providers.bitcoin.htlc.HTLC method*), 32
 address() (*swap.providers.bitcoin.wallet.Wallet method*), 29
 address() (*swap.providers.bytom.htlc.HTLC method*), 62
 address() (*swap.providers.bytom.wallet.Wallet method*), 59
 address() (*swap.providers.vapor.htlc.HTLC method*), 96
 address() (*swap.providers.vapor.wallet.Wallet method*), 93

amount_converter() (*in module swap.providers.bitcoin.utils*), 49
 amount_converter() (*in module swap.providers.bytom.utils*), 83
 amount_converter() (*in module swap.providers.vapor.utils*), 117

B

balance() (*swap.providers.bitcoin.htlc.HTLC method*), 33
 balance() (*swap.providers.bitcoin.wallet.Wallet method*), 30
 balance() (*swap.providers.bytom.htlc.HTLC method*), 62
 balance() (*swap.providers.bytom.wallet.Wallet method*), 59
 balance() (*swap.providers.vapor.htlc.HTLC method*), 96
 balance() (*swap.providers.vapor.wallet.Wallet method*), 93
 build_htlc() (*swap.providers.bitcoin.htlc.HTLC method*), 31
 build_htlc() (*swap.providers.bytom.htlc.HTLC method*), 60
 build_htlc() (*swap.providers.vapor.htlc.HTLC method*), 94
 build_transaction() (*in module swap.providers.bytom.rpc*), 80
 build_transaction() (*in module swap.providers.vapor.rpc*), 114
 build_transaction() (*swap.providers.bitcoin.transaction.ClaimTransaction method*), 36
 build_transaction() (*swap.providers.bitcoin.transaction.FundTransaction method*), 35
 build_transaction() (*swap.providers.bitcoin.transaction.RefundTransaction method*), 38
 build_transaction() (*swap.providers.bytom.transaction.ClaimTransaction method*), 67
 build_transaction() (*swap.providers.bytom.transaction.FundTransaction method*), 66
 build_transaction() (*swap.providers.bytom.transaction.RefundTransaction method*), 69
 build_transaction() (*swap.providers.vapor.transaction.ClaimTransaction method*), 101
 build_transaction() (*swap.providers.vapor.transaction.FundTransaction method*), 100

build_transaction() (swap.providers.vapor.transaction.RefundTransaction method), 103
 bytecode() (swap.providers.bitcoin.htlc.HTLC method), 32
 bytecode() (swap.providers.bytom.htlc.HTLC method), 61
 bytecode() (swap.providers.vapor.htlc.HTLC method), 95
C
 chain_code() (swap.providers.bitcoin.wallet.Wallet method), 28
 child_xprivate_key() (swap.providers.bytom.wallet.Wallet method), 58
 child_xprivate_key() (swap.providers.vapor.wallet.Wallet method), 92
 child_xpublic_key() (swap.providers.bytom.wallet.Wallet method), 58
 child_xpublic_key() (swap.providers.vapor.wallet.Wallet method), 92
 ClaimSignature (class in swap.providers.bitcoin.signature), 45
 ClaimSignature (class in swap.providers.bytom.signature), 77
 ClaimSignature (class in swap.providers.vapor.signature), 111
 ClaimSolver (class in swap.providers.bitcoin.solver), 40
 ClaimSolver (class in swap.providers.bytom.solver), 71
 ClaimSolver (class in swap.providers.vapor.solver), 105
 ClaimTransaction (class in swap.providers.bitcoin.transaction), 36
 ClaimTransaction (class in swap.providers.bytom.transaction), 67
 ClaimTransaction (class in swap.providers.vapor.transaction), 101
 clean_derivation() (swap.providers.bitcoin.wallet.Wallet method), 25
 clean_derivation() (swap.providers.bytom.wallet.Wallet method), 55
 clean_derivation() (swap.providers.vapor.wallet.Wallet method), 89
 clean_transaction_raw() (in module swap.utils), 22
 compressed() (swap.providers.bitcoin.wallet.Wallet method), 28
D
 decode_raw() (in module swap.providers.bitcoin.rpc), 48
 decode_raw() (in module swap.providers.bytom.rpc), 81
 decode_raw() (in module swap.providers.vapor.rpc), 116
 decode_transaction_raw() (in module swap.providers.bitcoin.utils), 50
 decode_transaction_raw() (in module swap.providers.bytom.utils), 84
 decode_transaction_raw() (in module swap.providers.vapor.utils), 118
 double_sha256() (in module swap.utils), 22
E
 entropy() (swap.providers.bitcoin.wallet.Wallet method), 26
 entropy() (swap.providers.bytom.wallet.Wallet method), 56
 entropy() (swap.providers.vapor.wallet.Wallet method), 90
 estimate_transaction_fee() (in module swap.providers.bytom.rpc), 79
 estimate_transaction_fee() (in module swap.providers.vapor.rpc), 113
 expand_xprivate_key() (swap.providers.bytom.wallet.Wallet method), 58
 expand_xprivate_key() (swap.providers.vapor.wallet.Wallet method), 91
F
 fee() (swap.providers.bitcoin.signature.Signature method), 41
 fee() (swap.providers.bitcoin.transaction.Transaction method), 34
 fee() (swap.providers.bytom.signature.Signature method), 72
 fee() (swap.providers.bytom.transaction.Transaction method), 63
 fee() (swap.providers.vapor.signature.Signature method), 106
 fee() (swap.providers.vapor.transaction.Transaction method), 97
 fee_calculator() (in module swap.providers.bitcoin.utils), 49
 from_bytecode() (swap.providers.bitcoin.htlc.HTLC method), 31

from_bytecode() (*swap.providers.bytom.htlc.HTLC method*), 61
 from_bytecode() (*swap.providers.vapor.htlc.HTLC method*), 95
 from_entropy() (*swap.providers.bitcoin.wallet.Wallet method*), 23
 from_entropy() (*swap.providers.bytom.wallet.Wallet method*), 53
 from_entropy() (*swap.providers.vapor.wallet.Wallet method*), 87
 from_index() (*swap.providers.bitcoin.wallet.Wallet method*), 25
 from_index() (*swap.providers.bytom.wallet.Wallet method*), 55
 from_index() (*swap.providers.vapor.wallet.Wallet method*), 89
 from_indexes() (*swap.providers.bytom.wallet.Wallet method*), 55
 from_indexes() (*swap.providers.vapor.wallet.Wallet method*), 89
 from_mnemonic() (*swap.providers.bitcoin.wallet.Wallet method*), 23
 from_mnemonic() (*swap.providers.bytom.wallet.Wallet method*), 53
 from_mnemonic() (*swap.providers.vapor.wallet.Wallet method*), 87
 from_opcode() (*swap.providers.bitcoin.htlc.HTLC method*), 31
 from_path() (*swap.providers.bitcoin.wallet.Wallet method*), 25
 from_path() (*swap.providers.bytom.wallet.Wallet method*), 54
 from_path() (*swap.providers.vapor.wallet.Wallet method*), 88
 from_private_key() (*swap.providers.bitcoin.wallet.Wallet method*), 25
 from_private_key() (*swap.providers.bytom.wallet.Wallet method*), 54
 from_private_key() (*swap.providers.vapor.wallet.Wallet method*), 88
 from_root_xprivate_key() (*swap.providers.bitcoin.wallet.Wallet method*), 24
 from_seed() (*swap.providers.bitcoin.wallet.Wallet method*), 24
 from_seed() (*swap.providers.bytom.wallet.Wallet method*), 54
 from_seed() (*swap.providers.vapor.wallet.Wallet method*), 88
 from_wif() (*swap.providers.bitcoin.wallet.Wallet method*), 24
 from_xprivate_key() (*swap.providers.bitcoin.wallet.Wallet method*), 24
 from_xprivate_key() (*swap.providers.bytom.wallet.Wallet method*), 54
 from_xprivate_key() (*swap.providers.vapor.wallet.Wallet method*), 88
 FundSignature (*class in swap.providers.bitcoin.signature*), 44
 FundSignature (*class in swap.providers.bytom.signature*), 76
 FundSignature (*class in swap.providers.vapor.signature*), 110
 FundSolver (*class in swap.providers.bitcoin.solver*), 39
 FundSolver (*class in swap.providers.bytom.solver*), 70
 FundSolver (*class in swap.providers.vapor.solver*), 104
 FundTransaction (*class in swap.providers.bitcoin.transaction*), 35
 FundTransaction (*class in swap.providers.bytom.transaction*), 66
 FundTransaction (*class in swap.providers.vapor.transaction*), 100

G

generate_entropy() (*in module swap.utils*), 21
 generate_mnemonic() (*in module swap.utils*), 21
 generate_passphrase() (*in module swap.utils*), 21
 get_address_hash() (*in module swap.providers.bitcoin.utils*), 51
 get_address_type() (*in module swap.providers.bitcoin.utils*), 51
 get_address_type() (*in module swap.providers.bytom.utils*), 85
 get_address_type() (*in module swap.providers.vapor.utils*), 119
 get_balance() (*in module swap.providers.bitcoin.rpc*), 46
 get_balance() (*in module swap.providers.bytom.rpc*), 78
 get_balance() (*in module swap.providers.vapor.rpc*), 112
 get_mnemonic_language() (*in module swap.utils*), 22
 get_transaction() (*in module swap.providers.bitcoin.rpc*), 47
 get_transaction() (*in module swap.providers.bytom.rpc*), 81
 get_transaction() (*in module swap.providers.vapor.rpc*), 115

`get_utxos()` (in module `swap.providers.bitcoin.rpc`), 47

`get_utxos()` (in module `swap.providers.bytom.rpc`), 78

`get_utxos()` (in module `swap.providers.vapor.rpc`), 112

`guid()` (`swap.providers.bytom.wallet.Wallet` method), 58

`guid()` (`swap.providers.vapor.wallet.Wallet` method), 92

H

`hash()` (`swap.providers.bitcoin.htlc.HTLC` method), 32

`hash()` (`swap.providers.bitcoin.signature.Signature` method), 41

`hash()` (`swap.providers.bitcoin.transaction.Transaction` method), 34

`hash()` (`swap.providers.bitcoin.wallet.Wallet` method), 30

`hash()` (`swap.providers.bytom.htlc.HTLC` method), 62

`hash()` (`swap.providers.bytom.signature.Signature` method), 72

`hash()` (`swap.providers.bytom.transaction.Transaction` method), 63

`hash()` (`swap.providers.vapor.htlc.HTLC` method), 95

`hash()` (`swap.providers.vapor.signature.Signature` method), 106

`hash()` (`swap.providers.vapor.transaction.Transaction` method), 97

`HTLC` (class in `swap.providers.bitcoin.htlc`), 31

`HTLC` (class in `swap.providers.bytom.htlc`), 60

`HTLC` (class in `swap.providers.vapor.htlc`), 94

I

`indexes()` (`swap.providers.bytom.wallet.Wallet` method), 57

`indexes()` (`swap.providers.vapor.wallet.Wallet` method), 91

`is_address()` (in module `swap.providers.bitcoin.utils`), 49

`is_address()` (in module `swap.providers.bytom.utils`), 83

`is_address()` (in module `swap.providers.vapor.utils`), 117

`is_mnemonic()` (in module `swap.utils`), 21

`is_network()` (in module `swap.providers.bitcoin.utils`), 49

`is_network()` (in module `swap.providers.bytom.utils`), 83

`is_network()` (in module `swap.providers.vapor.utils`), 117

`is_transaction_raw()` (in module `swap.providers.bitcoin.utils`), 50

`is_transaction_raw()` (in module `swap.providers.bytom.utils`), 84

`is_transaction_raw()` (in module `swap.providers.vapor.utils`), 118

J

`json()` (`swap.providers.bitcoin.signature.Signature` method), 42

`json()` (`swap.providers.bitcoin.transaction.Transaction` method), 34

`json()` (`swap.providers.bytom.signature.Signature` method), 73

`json()` (`swap.providers.bytom.transaction.Transaction` method), 64

`json()` (`swap.providers.vapor.signature.Signature` method), 107

`json()` (`swap.providers.vapor.transaction.Transaction` method), 98

L

`language()` (`swap.providers.bitcoin.wallet.Wallet` method), 26

`language()` (`swap.providers.bytom.wallet.Wallet` method), 56

`language()` (`swap.providers.vapor.wallet.Wallet` method), 90

M

`mnemonic()` (`swap.providers.bitcoin.wallet.Wallet` method), 26

`mnemonic()` (`swap.providers.bytom.wallet.Wallet` method), 56

`mnemonic()` (`swap.providers.vapor.wallet.Wallet` method), 90

module

- `swap.providers.bitcoin.htlc`, 31
- `swap.providers.bitcoin.rpc`, 46
- `swap.providers.bitcoin.signature`, 41
- `swap.providers.bitcoin.solver`, 39
- `swap.providers.bitcoin.transaction`, 33
- `swap.providers.bitcoin.utils`, 49
- `swap.providers.bitcoin.wallet`, 23
- `swap.providers.bytom.htlc`, 60
- `swap.providers.bytom.rpc`, 78
- `swap.providers.bytom.signature`, 72
- `swap.providers.bytom.solver`, 70
- `swap.providers.bytom.transaction`, 63
- `swap.providers.bytom.utils`, 83
- `swap.providers.bytom.wallet`, 53
- `swap.providers.vapor.htlc`, 94
- `swap.providers.vapor.rpc`, 112
- `swap.providers.vapor.signature`, 106
- `swap.providers.vapor.solver`, 104

swap.providers.vapor.transaction, 97
 swap.providers.vapor.utils, 117
 swap.providers.vapor.wallet, 87
 swap.utils, 21

O

opcode() (swap.providers.bitcoin.htlc.HTLC method), 32
 opcode() (swap.providers.bytom.htlc.HTLC method), 61
 opcode() (swap.providers.vapor.htlc.HTLC method), 95

P

p2pkh() (swap.providers.bitcoin.wallet.Wallet method), 30
 passphrase() (swap.providers.bitcoin.wallet.Wallet method), 26
 passphrase() (swap.providers.bytom.wallet.Wallet method), 56
 passphrase() (swap.providers.vapor.wallet.Wallet method), 90
 path() (swap.providers.bitcoin.wallet.Wallet method), 29
 path() (swap.providers.bytom.wallet.Wallet method), 57
 path() (swap.providers.vapor.wallet.Wallet method), 91
 private_key() (swap.providers.bitcoin.wallet.Wallet method), 29
 private_key() (swap.providers.bytom.wallet.Wallet method), 58
 private_key() (swap.providers.vapor.wallet.Wallet method), 92
 program() (swap.providers.bytom.wallet.Wallet method), 59
 program() (swap.providers.vapor.wallet.Wallet method), 93
 public_key() (swap.providers.bitcoin.wallet.Wallet method), 29
 public_key() (swap.providers.bytom.wallet.Wallet method), 59
 public_key() (swap.providers.vapor.wallet.Wallet method), 93

R

raw() (swap.providers.bitcoin.signature.Signature method), 42
 raw() (swap.providers.bitcoin.transaction.Transaction method), 34
 raw() (swap.providers.bytom.signature.Signature method), 74
 raw() (swap.providers.bytom.transaction.Transaction method), 64

raw() (swap.providers.vapor.signature.Signature method), 108

raw() (swap.providers.vapor.transaction.Transaction method), 98

RefundSignature (class in swap.providers.bitcoin.signature), 46

RefundSignature (class in swap.providers.bytom.signature), 77

RefundSignature (class in swap.providers.vapor.signature), 111

RefundSolver (class in swap.providers.bitcoin.solver), 40

RefundSolver (class in swap.providers.bytom.solver), 71

RefundSolver (class in swap.providers.vapor.solver), 105

RefundTransaction (class in swap.providers.bitcoin.transaction), 38

RefundTransaction (class in swap.providers.bytom.transaction), 69

RefundTransaction (class in swap.providers.vapor.transaction), 103

root_xprivate_key() (swap.providers.bitcoin.wallet.Wallet method), 27

root_xpublic_key() (swap.providers.bitcoin.wallet.Wallet method), 27

S

seed() (swap.providers.bitcoin.wallet.Wallet method), 27

seed() (swap.providers.bytom.wallet.Wallet method), 56

seed() (swap.providers.vapor.wallet.Wallet method), 90

sha256() (in module swap.utils), 22

sign() (swap.providers.bitcoin.signature.ClaimSignature method), 45

sign() (swap.providers.bitcoin.signature.FundSignature method), 44

sign() (swap.providers.bitcoin.signature.RefundSignature method), 46

sign() (swap.providers.bitcoin.signature.Signature method), 43

sign() (swap.providers.bitcoin.transaction.ClaimTransaction method), 37

sign() (swap.providers.bitcoin.transaction.FundTransaction method), 36

sign() (swap.providers.bitcoin.transaction.RefundTransaction method), 38

sign() (swap.providers.bytom.signature.ClaimSignature method), 77

sign() (*swap.providers.bytom.signature.FundSignature* method), 76
sign() (*swap.providers.bytom.signature.RefundSignature* method), 77
sign() (*swap.providers.bytom.signature.Signature* method), 74
sign() (*swap.providers.bytom.transaction.ClaimTransaction* method), 68
sign() (*swap.providers.bytom.transaction.FundTransaction* method), 67
sign() (*swap.providers.bytom.transaction.RefundTransaction* method), 69
sign() (*swap.providers.bytom.transaction.Transaction* method), 65
sign() (*swap.providers.vapor.signature.ClaimSignature* method), 111
sign() (*swap.providers.vapor.signature.FundSignature* method), 110
sign() (*swap.providers.vapor.signature.RefundSignature* method), 111
sign() (*swap.providers.vapor.signature.Signature* method), 108
sign() (*swap.providers.vapor.transaction.ClaimTransaction* method), 102
sign() (*swap.providers.vapor.transaction.FundTransaction* method), 101
sign() (*swap.providers.vapor.transaction.RefundTransaction* method), 103
sign() (*swap.providers.vapor.transaction.Transaction* method), 99
Signature (class in *swap.providers.bitcoin.signature*), 41
Signature (class in *swap.providers.bytom.signature*), 72
Signature (class in *swap.providers.vapor.signature*), 106
signatures() (*swap.providers.bytom.signature.Signature* method), 75
signatures() (*swap.providers.bytom.transaction.Transaction* method), 65
signatures() (*swap.providers.vapor.signature.Signature* method), 109
signatures() (*swap.providers.vapor.transaction.Transaction* method), 99
strength() (*swap.providers.bitcoin.wallet.Wallet* method), 26
strength() (*swap.providers.bytom.wallet.Wallet* method), 56
strength() (*swap.providers.vapor.wallet.Wallet* method), 89
submit_raw() (in module *swap.providers.bitcoin.rpc*), 48
submit_raw() (in module *swap.providers.bytom.rpc*), 82
submit_raw() (in module *swap.providers.vapor.rpc*), 116
submit_transaction_raw() (in module *swap.providers.bitcoin.utils*), 51
submit_transaction_raw() (in module *swap.providers.bytom.utils*), 84
submit_transaction_raw() (in module *swap.providers.vapor.utils*), 118
swap command line option
 --version, 9
 -v, 9
swap.providers.bitcoin.htlc module, 31
swap.providers.bitcoin.rpc module, 46
swap.providers.bitcoin.signature module, 41
swap.providers.bitcoin.solver module, 39
swap.providers.bitcoin.transaction module, 33
swap.providers.bitcoin.utils module, 49
swap.providers.bitcoin.wallet module, 23
swap.providers.bytom.htlc module, 60
swap.providers.bytom.rpc module, 78
swap.providers.bytom.signature module, 72
swap.providers.bytom.solver module, 70
swap.providers.bytom.transaction module, 63
swap.providers.bytom.utils module, 83
swap.providers.bytom.wallet module, 53
swap.providers.vapor.htlc module, 94
swap.providers.vapor.rpc module, 112
swap.providers.vapor.signature module, 106
swap.providers.vapor.solver module, 104
swap.providers.vapor.transaction module, 97
swap.providers.vapor.utils module, 117
swap.providers.vapor.wallet module, 87
swap.utils

module, 21
 swap-bitcoin-claim command line option
 --address <address>, 10
 --amount <amount>, 10
 --network <network>, 10
 --transaction-id <transaction_id>, 10
 --version <version>, 10
 -a, 10
 -am, 10
 -n, 10
 -ti, 10
 -v, 10
 swap-bitcoin-decode command line option
 --indent <indent>, 10
 --offline <offline>, 10
 --transaction-raw <transaction_raw>, 10
 -i, 10
 -o, 10
 -tr, 10
 swap-bitcoin-fund command line option
 --address <address>, 11
 --amount <amount>, 11
 --htlc-address <htlc_address>, 11
 --network <network>, 11
 --version <version>, 11
 -a, 11
 -am, 11
 -ha, 11
 -n, 11
 -v, 11
 swap-bitcoin-htlc command line option
 --network <network>, 11
 --recipient-address <recipient_address>, 11
 --secret-hash <secret_hash>, 11
 --sender-address <sender_address>, 11
 --sequence <sequence>, 11
 -n, 11
 -ra, 11
 -s, 11
 -sa, 11
 -sh, 11
 swap-bitcoin-refund command line option
 --address <address>, 12
 --amount <amount>, 12
 --network <network>, 12
 --transaction-id <transaction_id>, 12
 --version <version>, 12
 -a, 12
 -am, 12
 -n, 12
 -ti, 12
 -v, 12
 swap-bitcoin-sign command line option
 --account <account>, 12
 --address <address>, 13
 --bytecode <bytecode>, 12
 --change <change>, 12
 --path <path>, 13
 --root-xprivate-key <root_xprivate_key>, 12
 --secret-key <secret_key>, 12
 --sequence <sequence>, 12
 --transaction-raw <transaction_raw>, 12
 --version <version>, 13
 -ac, 12
 -ad, 13
 -b, 12
 -ch, 12
 -p, 13
 -rxk, 12
 -s, 12
 -sk, 12
 -tr, 12
 -v, 13
 swap-bitcoin-submit command line option
 --transaction-raw <transaction_raw>, 13
 -tr, 13
 swap-bytom-claim command line option
 --address <address>, 13
 --amount <amount>, 13
 --asset <asset>, 13
 --network <network>, 14
 --transaction-id <transaction_id>, 13
 -a, 13
 -am, 13
 -as, 13
 -n, 14
 -ti, 13
 swap-bytom-decode command line option
 --indent <indent>, 14
 --transaction-raw <transaction_raw>, 14
 -i, 14
 -tr, 14
 swap-bytom-fund command line option
 --address <address>, 14
 --amount <amount>, 14

```
--asset <asset>, 14
--htlc-address <htlc_address>, 14
--network <network>, 14
-a, 14
-am, 14
-as, 14
-ha, 14
-n, 14
swap-bytom-htlc command line option
--network <network>, 15
--recipient-public-key
  <recipient_public_key>, 15
--secret-hash <secret_hash>, 15
--sender-public-key
  <sender_public_key>, 15
--sequence <sequence>, 15
-n, 15
-rpk, 15
-s, 15
-sh, 15
-spk, 15
swap-bytom-refund command line option
--address <address>, 15
--amount <amount>, 15
--asset <asset>, 15
--network <network>, 15
--transaction-id <transaction_id>,
  15
-a, 15
-am, 15
-as, 15
-n, 15
-ti, 15
swap-bytom-sign command line option
--account <account>, 16
--address <address>, 16
--bytecode <bytecode>, 16
--change <change>, 16
--indexes <indexes>, 16
--path <path>, 16
--secret-key <secret_key>, 16
--transaction-raw
  <transaction_raw>, 16
--xprivate-key <xprivate_key>, 16
-ac, 16
-ad, 16
-b, 16
-ch, 16
-i, 16
-p, 16
-sk, 16
-tr, 16
-xk, 16
swap-bytom-submit command line option
--transaction-raw
  <transaction_raw>, 16
-tr, 16
swap-vapor-claim command line option
--address <address>, 17
--amount <amount>, 17
--asset <asset>, 17
--network <network>, 17
--transaction-id <transaction_id>,
  17
-a, 17
-am, 17
-as, 17
-n, 17
-ti, 17
swap-vapor-decode command line option
--indent <indent>, 17
--transaction-raw
  <transaction_raw>, 17
-i, 17
-tr, 17
swap-vapor-fund command line option
--address <address>, 18
--amount <amount>, 18
--asset <asset>, 18
--htlc-address <htlc_address>, 18
--network <network>, 18
-a, 18
-am, 18
-as, 18
-ha, 18
-n, 18
swap-vapor-htlc command line option
--network <network>, 18
--recipient-public-key
  <recipient_public_key>, 18
--secret-hash <secret_hash>, 18
--sender-public-key
  <sender_public_key>, 18
--sequence <sequence>, 18
-n, 18
-rpk, 18
-s, 18
-sh, 18
-spk, 18
swap-vapor-refund command line option
--address <address>, 19
--amount <amount>, 19
--asset <asset>, 19
--network <network>, 19
--transaction-id <transaction_id>,
  19
-a, 19
-am, 19
```

-as, 19
 -n, 19
 -ti, 19
 swap-vapor-sign command line option
 --account <account>, 19
 --address <address>, 19
 --bytecode <bytecode>, 19
 --change <change>, 19
 --indexes <indexes>, 20
 --path <path>, 20
 --secret-key <secret_key>, 19
 --transaction-raw
 <transaction_raw>, 19
 --xprivate-key <xprivate_key>, 19
 -ac, 19
 -ad, 19
 -b, 19
 -ch, 19
 -i, 20
 -p, 20
 -sk, 19
 -tr, 19
 -xk, 19
 swap-vapor-submit command line option
 --transaction-raw
 <transaction_raw>, 20
 -tr, 20

T

Transaction (class *swap.providers.bitcoin.transaction*), 33
 Transaction (class *swap.providers.bytom.transaction*), 63
 Transaction (class *swap.providers.vapor.transaction*), 97
 transaction_raw() (swap.providers.bitcoin.signature.Signature method), 44
 transaction_raw() (swap.providers.bitcoin.transaction.ClaimTransaction method), 37
 transaction_raw() (swap.providers.bitcoin.transaction.FundTransaction method), 36
 transaction_raw() (swap.providers.bitcoin.transaction.RefundTransaction method), 39
 transaction_raw() (swap.providers.bytom.signature.Signature method), 76
 transaction_raw() (swap.providers.bytom.transaction.ClaimTransaction method), 68
 transaction_raw() (swap.providers.bytom.transaction.FundTransaction method), 67
 transaction_raw() (swap.providers.bytom.transaction.RefundTransaction method), 70
 transaction_raw() (swap.providers.vapor.signature.Signature method), 110
 transaction_raw() (swap.providers.vapor.transaction.ClaimTransaction method), 102
 transaction_raw() (swap.providers.vapor.transaction.FundTransaction method), 101
 transaction_raw() (swap.providers.vapor.transaction.RefundTransaction method), 104
 type() (swap.providers.bitcoin.signature.Signature method), 43
 type() (swap.providers.bitcoin.transaction.Transaction method), 35
 type() (swap.providers.bytom.signature.Signature method), 74
 type() (swap.providers.bytom.transaction.Transaction method), 64
 type() (swap.providers.vapor.signature.Signature method), 108
 type() (swap.providers.vapor.transaction.Transaction method), 98

U

uncompressed() (swap.providers.bitcoin.wallet.Wallet method), 28
 unsigned_datas() (swap.providers.bytom.signature.Signature method), 75
 unsigned_datas() (swap.providers.bytom.transaction.Transaction method), 65
 unsigned_datas() (swap.providers.vapor.signature.Signature method), 109
 unsigned_datas() (swap.providers.vapor.transaction.Transaction method), 99
 utxos() (swap.providers.bitcoin.htlc.HTLC method), 33
 utxos() (swap.providers.bitcoin.wallet.Wallet method), 30
 utxos() (swap.providers.bytom.htlc.HTLC method), 62
 utxos() (swap.providers.bytom.wallet.Wallet method), 60
 utxos() (swap.providers.vapor.htlc.HTLC method), 96
 utxos() (swap.providers.vapor.wallet.Wallet method), 93

W

Wallet (class in *swap.providers.bitcoin.wallet*), 23

Wallet (class in *swap.providers.bytom.wallet*), 53

Wallet (class in *swap.providers.vapor.wallet*), 87

wif() (*swap.providers.bitcoin.wallet.Wallet* method),
29

X

xprivate_key() (*swap.providers.bitcoin.wallet.Wallet*
method), 27

xprivate_key() (*swap.providers.bytom.wallet.Wallet*
method), 57

xprivate_key() (*swap.providers.vapor.wallet.Wallet*
method), 91

xpublic_key() (*swap.providers.bitcoin.wallet.Wallet*
method), 28

xpublic_key() (*swap.providers.bytom.wallet.Wallet*
method), 57

xpublic_key() (*swap.providers.vapor.wallet.Wallet*
method), 91